



How to Enable Port Filtering in DCM-604

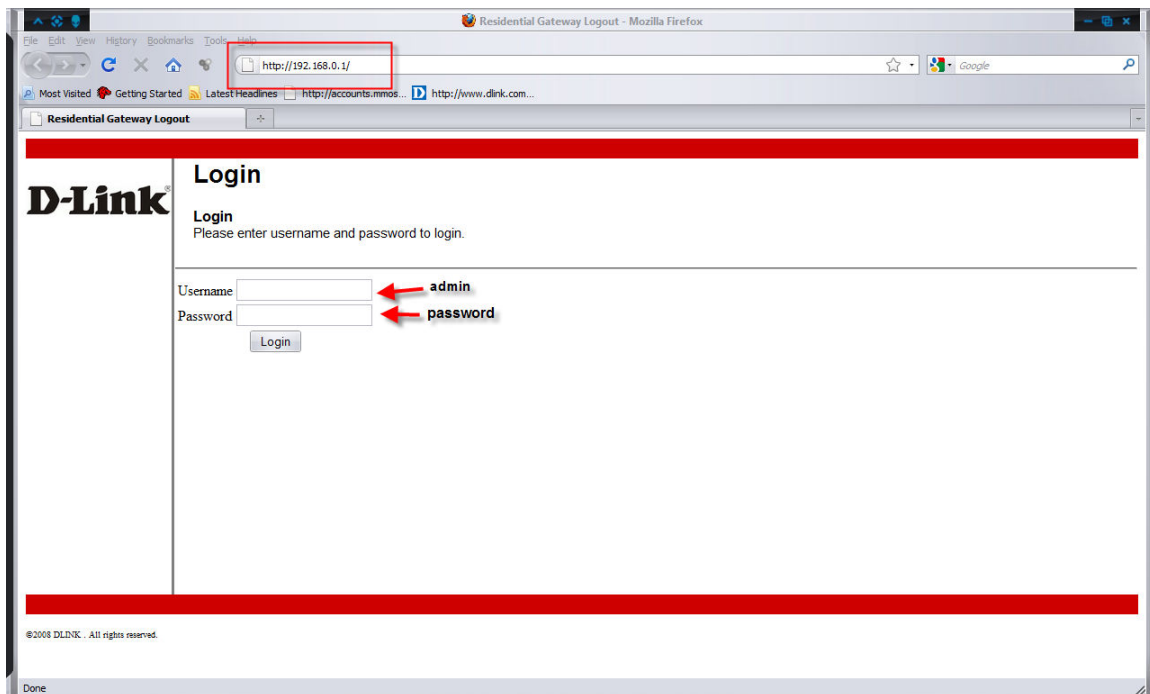

Go to 192.168.0.1
Enter the username and password

Username : admin
Password : password

Click on Login

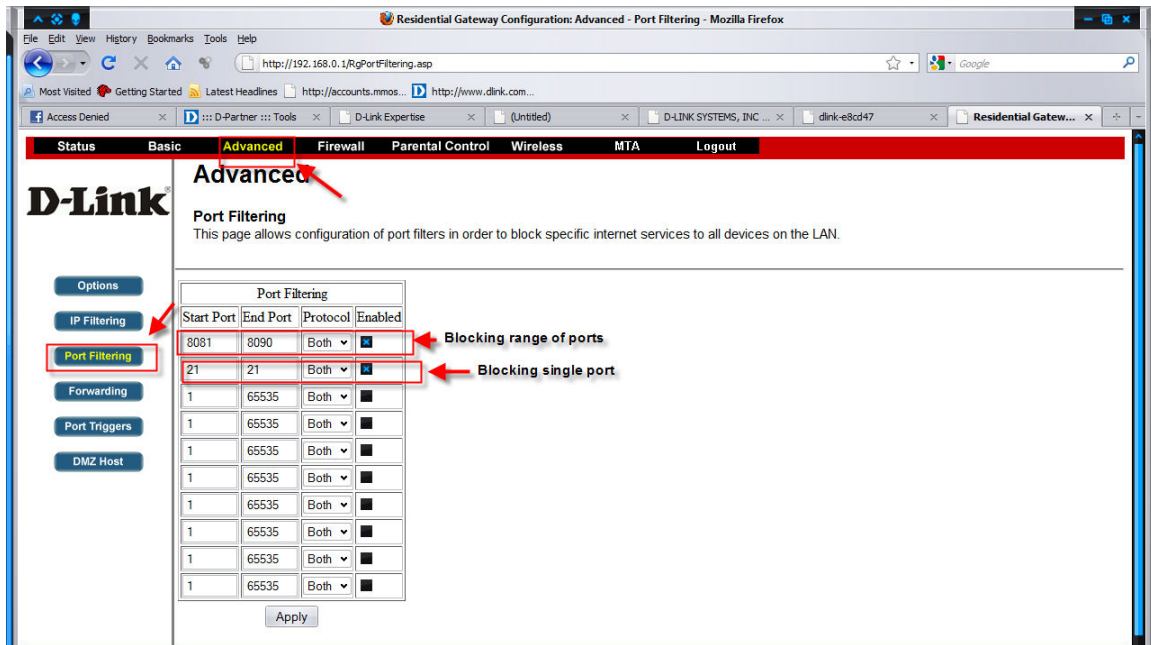

Go to Advanced -> Port Filtering

Enter the ports that you want to block from LAN to WAN.

It can be either in a range of ports or in single port.

Click Apply.

Done!!!

****Please take note that once this policy is enabled, it will apply to all the LAN and WLAN network.***