

How to: Flip Image_DCS-2630L.

Step 1: Connect the power of the camera and power on.


Step 2: Open Internet Explorer and enter **http://sg.mydlink.com**




Step 3: Enter mydlink registered **username** and **password**. Click on **Sign In**.




Step 4: Select **DCS-2630L**. Click on **Settings**

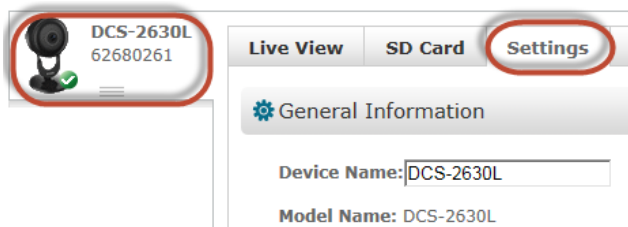


Step 5: Click on **Advanced Settings**.

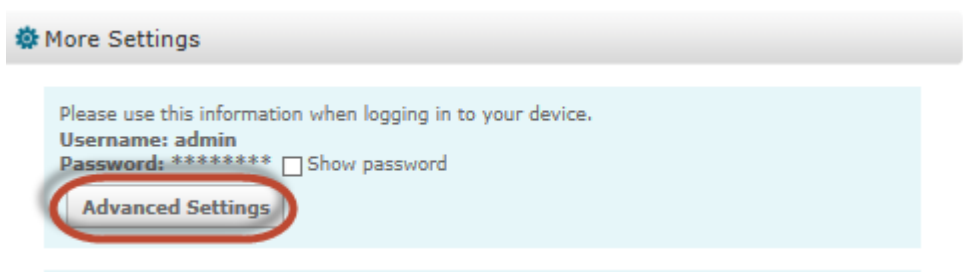

Step 6: Click on **Open the Advanced Settings window**.

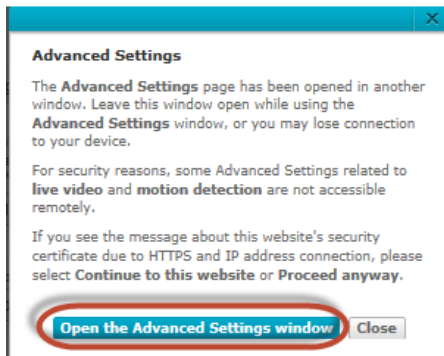


Step 7: Copy down the IP address of the DCS-2630L show in the URL bar.

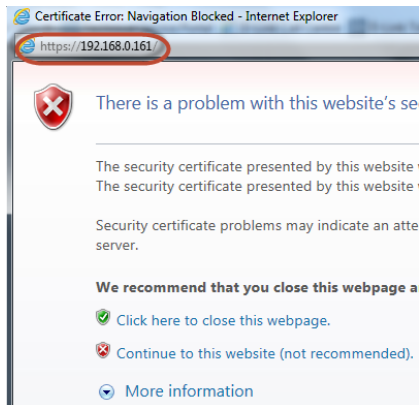

Step 8: Open Internet Explorer and enter the IP address of the camera that you had copy down on the URL bar.



Step 9: Enter the camera **user name** and **password** that had set during setting up of the camera. Click on **OK**.

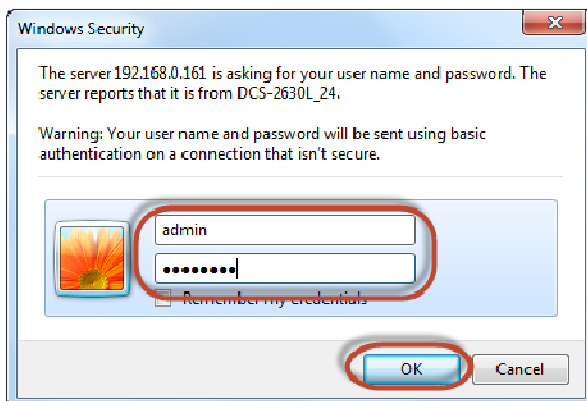

- Step 10:** a) Click on **Setup > Image Setup**.
b) Put a **Tick** in the box beside **Flip**.

The screenshot displays the web interface for the DCS-2630L camera. The top navigation bar includes 'LIVE VIDEO', 'SETUP', and 'MAINTENANCE'. The left sidebar lists various configuration options, with 'Image Setup' selected and circled in red. The main content area is divided into three sections: 'IMAGE SETUP' with a notice about immediate changes, 'LIVE VIDEO' showing a camera feed of a room with a large colorful mural, and 'IMAGE SETTINGS' with various controls. The 'Flip' checkbox is checked and circled in red.

IMAGE SETTINGS	
Brightness	50
Contrast	70
B/W	<input type="checkbox"/>
Flip	<input checked="" type="checkbox"/>
Saturation	60
Sharpness	60
Mirror	<input type="checkbox"/>
Frequency	50Hz

--- END ---