


D-Link® Technical Support Setup Procedure

How To Flip the Image on DCS-930L & DCS-932L

Step 1: Please access to your DCS-930L/DCS-932L WEB Interface via www.mylink.com.

If you know the IP Address of your camera, you may access the WEB Interface directly by opening a web browser such as Internet Explorer, Mozilla Firefox or Safari. On the address bar, type in the IP Address of the camera, for example <http://192.168.0.11>, press **Enter** key on your keyboard.

Please enter the username "admin" and the password to login your camera.

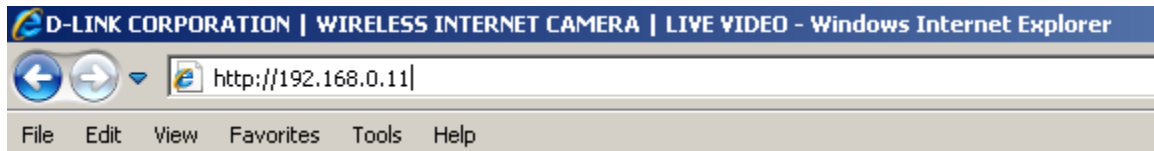

Step 2: Click on the **SETUP** tab on top and then click on the **Image Setup** on the Left Hand Side.

Under the **IMAGE SETTINGS** section, put a check mark on **Flip Image**.

Product: DCS-932L

D-Link®

DCS-932L //	LIVE VIDEO	SETUP	MAINTENANCE	STATUS
-------------	------------	-------	-------------	--------

Wizard

Network Setup

Wireless Setup

Dynamic DNS

Image Setup

Video

Audio

Motion Detection

Mail

FTP

Time and Date

Day/Night Mode

Logout

IMAGE SETUP

In this section, you can configure the image settings for your camera.

IMAGE SETTINGS

Enable Anti Flicker	<input type="checkbox"/>
Flip Image	<input checked="" type="checkbox"/>
Mirror	<input type="checkbox"/>
Brightness Control	+0 ▾
Contrast Control	+0 ▾
Saturation Control	+0 ▾