

# **D-Link®** Technical Support Setup Procedure

---

FAQ: How to change Wireless SSID and Password

Release date: 9/07/2015

Model Support: DSL-2877AL

H/W: A1, A2

S/W: 1.00.10TH

# D-Link® Technical Support Setup Procedure

การแก้ไข Wireless SSID และรหัสผ่าน สามารถทำได้อย่างไร


ขั้นตอนที่ 1 : เปิดเว็บเบราว์เซอร์ของคุณ แล้วพิมพ์ <http://192.168.1.1> ในช่องของ Address Bar



ชื่อผู้ใช้งานที่มาจากโรงงานคือ admin แล้วใส่รหัสผ่านของคุณ ในกรณีรหัสผ่านไม่ได้มีการเปลี่ยนแปลง ให้ใช้ค่าที่มาจากโรงงานเป็น admin แล้วคลิก Login



ขั้นตอนที่ 2 : คลิกบนแท็บของ Setup ที่อยู่ทางด้านบนแล้วคลิก Wireless Setup จากเมนูที่อยู่ทางด้านซ้ายมือ

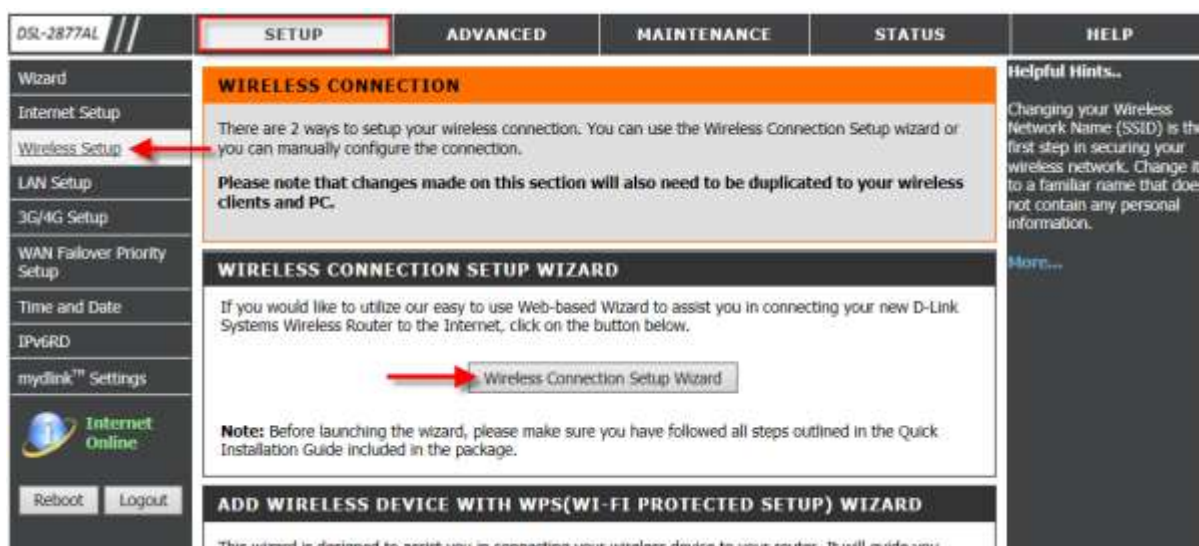


คลิกบน Wireless Connection Setup Wizard

ขั้นตอนที่ 3 : เริ่มต้นการทำงานของ Wizard

- คุณอาจต้องการเปลี่ยนชื่อ SSID จากค่าที่มาจากโรงงานในช่อง 2.4 GHz Band
- คุณอาจต้องการเปลี่ยนชื่อ SSID จากค่าที่มาจากโรงงานในช่อง 5 GHz Band

Note: แนะนำให้ใช้การเข้ารหัสชนิด WPA ไซร์ดงภาพด้านล่าง

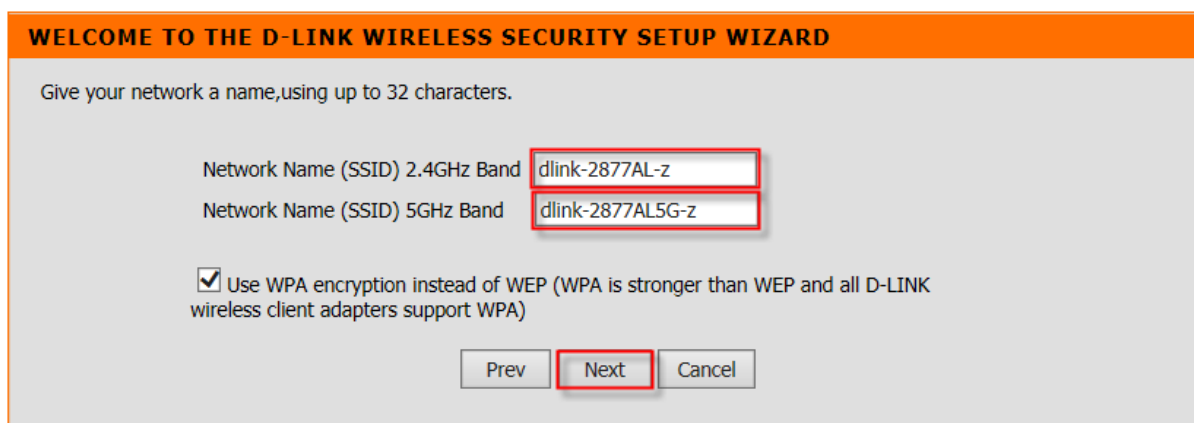

คลิก Next เพื่อไปยังขั้นตอนถัดไป

FAQ : How to change Wireless SSID and Password

**WELCOME TO THE D-LINK WIRELESS SECURITY SETUP WIZARD**

The WPA (Wi-Fi Protected Access) key must meet one of the following guidelines:

- Between 8 and 63 characters (A longer WPA key is more secure than a short one)
- Exactly 64 characters using 0-9 and A-F

**2.4G Band Wireless Security Password:**

**5G Band Wireless Security Password:**

กรุณาใส่ตัวเลข 8 ตัวที่เป็นรหัสผ่านของ 2.4G Band Wireless Security Password

กรุณาใส่ตัวเลข 8 ตัวที่เป็นรหัสผ่านของ 5G Band Wireless Security Password

คลิก Next เพื่อไปยังขั้นตอนถัดไป.

**ADD WIRELESS DEVICE WITH WPS (WI-FI PROTECTED SETUP)**

Please enter the following settings in the wireless device that you are adding to your wireless network and keep a note of it for future reference.

2.4GHz Band Wireless Network Name (SSID) : **dlink-2877AL-z**  
 Wireless Security Mode : **WPA**  
 Network Key :

5GHz Band Wireless Network Name (SSID) : **dlink-2877AL5G-z**  
 Wireless Security Mode : **WPA**  
 Network Key :

ตรวจสอบความถูกต้องของ SSID ทั้งความถี่ 2.4/5 GH , โหมดของความปลอดภัย , รหัสผ่านว่า ถูกต้องหรือไม่

กด Save เพื่อไปยังขั้นตอนถัดไป

**ADD WIRELESS DEVICE WITH WPS (WI-FI PROTECTED SETUP)**

Please enter the following settings in the wireless device that you are adding to your wireless network and keep a note of it for future reference.

Network Name (SSID) : **dlink-2877AL-z**  
Wireless Security Mode : **WPA/WPA2 TKIP/AES**  
Network Key :

Network Name (SSID) : **dlink-2877AL5G-z**  
Wireless Security Mode : **WPA/WPA2 TKIP/AES**  
Network Key :

กรุณำบันทึกค่าของ SSID ทั้งความถี่ 2.4/5 GH , โหมดของความปลอดภ้ย , รหัสผ่าน สำหรั้งการต่อเชื่อมกับ  
อุปกรณ์ Client  
คลิก OK เพื่อเสร็จสิ้นการตั้งค่าผ่าน Wizard

# D-Link® Technical Support Setup Procedure

---

- **How do I change the Wireless SSID and Wireless Password on my router?**

**Step 1:** Open your Internet browser and enter <http://192.168.1.1> into the address bar.




Enter your login information. If you have not changed the default settings, the

- **Username** field is Admin and
- **Password** field should Admin. Click **Login**.

A screenshot of the D-Link router's login page. At the top, there is a dark grey header bar with 'Product Page : DSL-2877AL' on the left and 'Firmware Version : ' on the right. Below this is an orange banner with the 'D-Link' logo. The main content area has an orange header with the word 'LOGIN'. Below this, it says 'Login in to the router'. There are two input fields: 'Username :' and 'Password :'. A 'Login' button is located below the password field. At the bottom, there is a dark grey footer bar with the word 'BROADBAND' in white.

FAQ : How to change Wireless SSID and Password

**Step 2:** Click on the **Setup** tab on the top of the page and then click on **Wireless Setup** from the menu on the left-hand side.

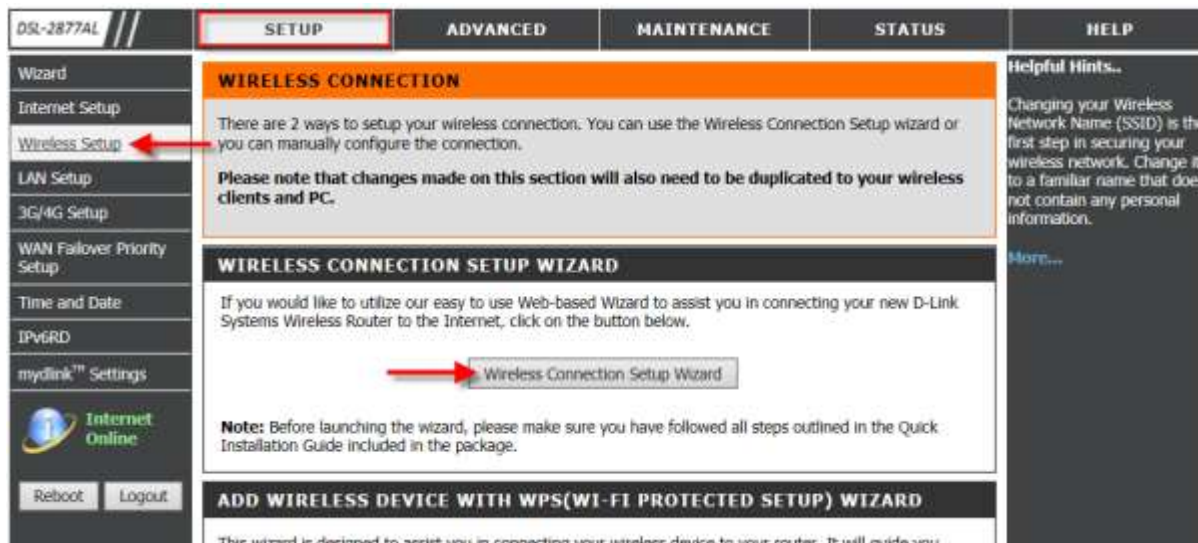

Click on **Wireless Connection Setup Wizard**.

**Step 3:** Upon launching the **Wizard**,

- You may wish to change the default **SSID** to a desired SSID in the **2.4GHz Band** field.
- You may wish to change the default **SSID** to a desired SSID in the **5GHz Band** field.

**Note:** It is recommended to use WPA Encryption as shown.

The screenshot shows the **WELCOME TO THE D-LINK WIRELESS SECURITY SETUP WIZARD** screen. It prompts the user to "Give your network a name, using up to 32 characters." Below this, there are two input fields: "Network Name (SSID) 2.4GHz Band" with the value "dlink-2877AL-z" and "Network Name (SSID) 5GHz Band" with the value "dlink-2877AL5G-z". Both fields are highlighted with red boxes. Below the input fields, there is a checkbox labeled ☒ "Use WPA encryption instead of WEP (WPA is stronger than WEP and all D-LINK wireless client adapters support WPA)". At the bottom, there are three buttons: **Prev**, **Next** (highlighted with a red box), and **Cancel**.

Click **Next** to continue.

FAQ : How to change Wireless SSID and Password

**WELCOME TO THE D-LINK WIRELESS SECURITY SETUP WIZARD**

The WPA (Wi-Fi Protected Access) key must meet one of the following guidelines:

- Between 8 and 63 characters (A longer WPA key is more secure than a short one)
- Exactly 64 characters using 0-9 and A-F

**2.4G Band Wireless Security Password:**

**5G Band Wireless Security Password:**

Please key in an **8-Digit** characters password in the **2.4G Band Wireless Security Password** field.  
Please key in an **8-Digit** characters password in the **5G Band Wireless Security Password** field.  
Click **Next** to continue.

**ADD WIRELESS DEVICE WITH WPS (WI-FI PROTECTED SETUP)**

Please enter the following settings in the wireless device that you are adding to your wireless network and keep a note of it for future reference.

2.4GHz Band Wireless Network Name (SSID) : **dlink-2877AL-z**  
Wireless Security Mode : **WPA**  
Network Key :

5GHz Band Wireless Network Name (SSID) : **dlink-2877AL5G-z**  
Wireless Security Mode : **WPA**  
Network Key :

Ensure that the 2.4/5GHz **SSIDs**, **Wireless Security Mode** and **Network Keys** have been correctly entered.  
Click **Save** to continue.



**ADD WIRELESS DEVICE WITH WPS (WI-FI PROTECTED SETUP)**

Please enter the following settings in the wireless device that you are adding to your wireless network and keep a note of it for future reference.

Network Name (SSID) : **dlink-2877AL-z**  
Wireless Security Mode : **WPA/WPA2 TKIP/AES**  
Network Key :

Network Name (SSID) : **dlink-2877AL5G-z**  
Wireless Security Mode : **WPA/WPA2 TKIP/AES**  
Network Key :

Please note down the 2.4/5GHz **SSIDs**, **Wireless Security Mode** and **Network Keys** to connect other Wireless Client Devices.

Click **OK** to complete the Wizard Setup.

## ฝ่ายสนับสนุนทางด้านเทคนิค

Call Center หมายเลขโทรศัพท์ 02-6617997

ภาษาไทย : จันทร์ ถึง ศุกร์ เวลา 9.00 น. – 18.00 น.

Thai : Mon – Fri : Time 9.00 – 18.00.

ภาษาอังกฤษ : เสาร์ , อาทิตย์ , วันหยุดนักษัตฤกษ์ และ วันธรรมดา หลัง 18.00 น.

English : Sat – Sun , Public Holiday and after 18.00 weekday.

Website : [www.dlink.co.th](http://www.dlink.co.th)

email: [support@dlink.com.sg](mailto:support@dlink.com.sg)

Facebook : <http://www.facebook.com/DLinkThailandFans>

## **Nationwide D-Link Service Centres :**

<p><b>Cham Issara Tower II</b> 3rd Floor, Cham Issara Tower II 2922/138 New Perchburi Road Khwang Bangkapi, Khet Huay-Kwang, Bangkok 10320, Thailand</p> <p>Tel : +66 (0) 2308-2040 Fax : +66 (0) 2308-2024 Call Center : +66 (0) 2716-6669 Operating hours: Mondays till Friday 9am to 6pm</p>	<p><b>Pantip Plaza Branch</b> 4th Fl. Pantip Plaza 604/3 Petchburi Road Room 439-440 Kwang Tharon Petchburi, Khet Ratchathewi Bangkok 10400, Thailand Tel : +66 (0) 2656 6037 Tel : +66 (0) 2656 6054 Fax : +66 (0) 2656 6042 Operating hours: Mondays till Sunday 10am to 7pm</p>	<p><b>Rayong Branch</b> 217/24 Sukhumvit Road Tumbon Noen Phra, Amphoe Mueang Rayong Changwat Rayong 21000, Thailand</p> <p>Tel : +66 (0) 3880-0631-3 Fax : +66 (0) 3880-0634 Operating hours: Mondays till Sunday 9am to 6pm</p>
<p><b>Surat Thani Branch</b> 412/8 Talat Mai Road Tumbon Talat, Amphoe Mueang Surat Thani Changwat Surat Thani 84000, Thailand</p> <p>Tel : +66 (0) 7721-7907-10 Fax : +66 (0) 7721-7910 Operating hours: Mondays till Friday 9am to 6pm</p>	<p><b>Phuket Branch</b> 156/3 Phang Nga Road Tumbon Taratyal, Amphoe Mueang Phuket Changwat Phuket 83000, Thailand</p> <p>Tel : +66 (0) 7623-2906-9 Fax : +66 (0) 7623-2909 Operating hours: Mondays till Friday 9am to 6pm</p>	<p><b>Hat Yai Branch</b> 48/106 Phadungpakdee Road Tumbon Hatyai, Amphoe Hatyai Changwat Songkhla 90110, Thailand</p> <p>Tel : +66 (0) 7435-4559-61 Fax : +66 (0) 7435-4561 Operating hours: Mondays till Friday 9am to 6pm</p>
<p><b>Chiang Mai Branch</b> 2/1 Moo 3, Chiang Mai-Lampang Road Tumbon Chang Pueak, Amphoe Mueang Chiang Mai Changwat Chiang Mai 50300, Thailand</p> <p>Tel : +66 (0) 5340-9482-6 Fax : +66 (0) 5340-9486 Operating hours: Mondays till Friday 9am to 6pm</p>	<p><b>Phitsanulok Branch</b> 117/7 Praongdam Road Tumbon Nai Mueang, Amphoe Mueang Phitsanulok Changwat Phitsanulok 65000, Thailand</p> <p>Tel : +66 (0) 5521-2323-5 Fax : +66 (0) 5521-2326 Operating hours: Mondays till Friday 9am to 6pm</p>	

FAQ : How to change Wireless SSID and Password