



D-Link® Technical Support Setup Procedure

Setup Wizard - Setting Up DCS-930L & DCS-932L WITH mydlink Account

Step 1: Run the CD Set-Up that came with the DCS-930L/DCS-932L. Click **Autorun** to run mydlink Set-Up Wizard. On the mydlink Set-Up Wizard screen, click **Start** button.

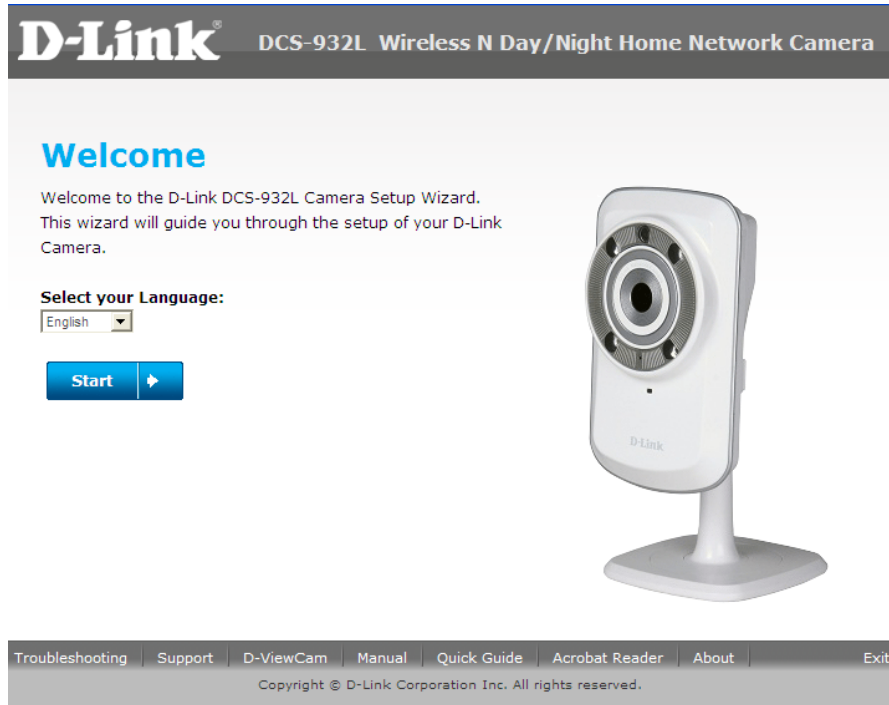

Step 2: Select the radio button **"No, my router does not have WPS Support"**. Click **Next** button.

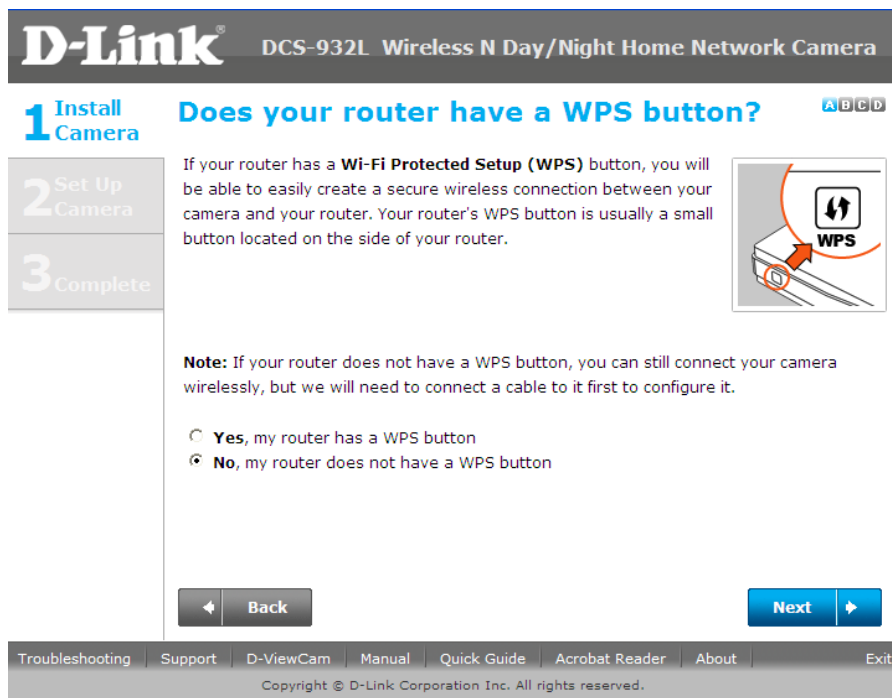



Step 3: Tighten the collar on the camera base after moving the camera to the position you want. Click **Next** button.

D-Link DCS-932L Wireless N Day/Night Home Network Camera

1 Install Camera **Let's set up your hardware** ABCD

2 Set Up Camera

3 Complete



Turn the collar on the camera base counter-clockwise to loosen it.

After moving the camera to the position you want, tighten the collar by turning it clockwise.

Back Next

Troubleshooting Support D-ViewCam Manual Quick Guide Acrobat Reader About Exit

Copyright © D-Link Corporation Inc. All rights reserved.



Step 4: Connect the included Ethernet cable to the port on the DCS-930L/DCS-932L camera. Connect the other end of the cable to an available LAN port on your router. Click **Next** button.

D-Link DCS-932L Wireless N Day/Night Home Network Camera

1 Install Camera **Connect the Ethernet cable** ABCD

2 Set Up Camera

3 Complete



(1) Connect the included Ethernet cable to the ETHERNET port on the DCS-932L camera.

(2) Connect the other end of the cable to an available LAN port on your router.

[Click here to see a basic overview of how your devices connect together.](#)

Back Next

Troubleshooting Support D-ViewCam Manual Quick Guide Acrobat Reader About Exit

Copyright © D-Link Corporation Inc. All rights reserved.

Step 5: Attach the power adapter to the power jack on the back of the DCS-930L/DCS-932L camera, and connect the power adapter to a power outlet. Ensure that the **Status** LED on the front of the camera is solid green after 30 seconds. Click **Next** button.

D-Link® DCS-932L Wireless N Day/Night Home Network Camera

1 Install Camera A B C D

2 Set Up Camera

3 Complete

Connect the power adapter



(1) Connect the power adapter to the power jack on the back of the camera and plug the other end into the power outlet.

(2) The LED on the front of the camera will turn green when the device is ready.

! [What do I do if the LED stays red?](#)

Back **Next**

Troubleshooting | Support | D-ViewCam | Manual | Quick Guide | Acrobat Reader | About | Exit

Copyright © D-Link Corporation Inc. All rights reserved.

Step 6: A pop up message will appear. Please check if the LED on the front of the camera lit is solid green. Click **Yes** button if it is solid green.

Is the LED on the front of your camera green?

Yes **No**

Step 7: Please wait while the Wizard is detecting the camera on your network.

The screenshot shows the D-Link setup wizard for the DCS-932L camera. The interface is titled "D-Link DCS-932L Wireless N Day/Night Home Network Camera". On the left, there is a progress bar with three steps: "1 Install Camera" (highlighted in blue), "2 Set Up Camera", and "3 Complete". The main content area displays "First, select your camera" and "Checking connection...Please wait..." with a loading spinner. At the bottom, there are "Back", "Retry", and "Next" buttons. A footer contains links for Troubleshooting, Support, D-ViewCam, Manual, Quick Guide, Acrobat Reader, About, and Exit, along with a copyright notice for D-Link Corporation Inc.

Step 8: You will now see the camera device information with its corresponding IP Settings and MAC Address. Click **Next** button.

The screenshot shows the D-Link setup wizard displaying camera device information. The interface is titled "D-Link DCS-932L Wireless N Day/Night Home Network Camera". On the left, the progress bar shows "1 Install Camera" (highlighted in blue), "2 Set Up Camera", and "3 Complete". The main content area displays "First, select your camera" and a table of detected devices. The table has columns for Device, MAC ID, IP Address, and Connection. The first device is DCS-932L with MAC ID F07D68041EA9, IP Address 192.168.2.100, and Connection DHCP. Below the table, there are legends for "Not Configured" (orange dot) and "Configured" (blue dot), and icons for "Wired" and "Wireless". A note instructs the user to check the MAC ID on the back of the camera. An image shows the back of the camera with a red circle around the MAC ID label, which contains the following information: FCC ID: KK2CS930LA1, IC ID: 1111A-CS930LA1, and MAC ID: 001122334455. At the bottom, there are "Back", "Retry", and "Next" buttons. A footer contains links for Troubleshooting, Support, D-ViewCam, Manual, Quick Guide, Acrobat Reader, About, and Exit, along with a copyright notice for D-Link Corporation Inc.

Device	MAC ID	IP Address	Connection
DCS-932L	F07D68041EA9	192.168.2.100	DHCP

FCC ID: KK2CS930LA1
IC ID: 1111A-CS930LA1
MAC ID: 001122334455

Step 9: Please enter a password to secure you camera. Click **Next** button when done.

The screenshot shows the 'Set your camera's password' step in a three-part installation process. The left sidebar indicates '1 Install Camera', '2 Set Up Camera', and '3 Complete'. The main area has the title 'Set your camera's password' and a sub-header 'Please enter a password to secure your camera.' Below this are three input fields: 'Admin ID' with 'admin' entered, 'New Password' with masked characters, and 'Confirm new password' also with masked characters. A note specifies: '(Must be 6-8 characters, must contain at least 2 letters, case-sensitive, no spaces.)'. At the bottom are 'Back' and 'Next' buttons. A footer contains navigation links: Troubleshooting, Support, D-ViewCam, Manual, Quick Guide, Acrobat Reader, About, and Exit, along with a copyright notice for D-Link Corporation Inc.

Step 10: If you want to setup your camera wirelessly make sure that your router supports wireless. If so, select the radio button **"I want to connect my camera wirelessly"**. On the Available Wireless Network, select the name of your wireless network and click **Next** button.

If you want to connect your camera via a network cable, please select **"Wired – I want to connect my camera through a cable (wired connection)"**. Click **Next** button.

The screenshot shows the 'Wired or Wireless?' step in the installation process. The left sidebar shows '1 Install Camera', '2 Set Up Camera', and '3 Complete'. The main area has the title 'Wired or Wireless?' and the question 'How would you like to connect your camera to your network?'. There are two radio button options: 'Wired - I want to connect my camera through a cable (wired connection)' and 'Wireless - I want to connect my camera wirelessly (wireless connection)'. The 'Wireless' option is selected and highlighted with a red box. Below this is a 'Select a Wireless Network:' section with a dropdown menu showing a list of networks including 'dlink', 'dir_655_5230', 'dlink_54G+', 'tydefault', 'DIR-655-Test', 'Hot_Spot_1', 'devel05', 'A9F1BDF1DAB1NVT4', and 'Custom...'. A 'Rescan' button is next to the dropdown. At the bottom are 'Back' and 'Next' buttons, with the 'Next' button highlighted by a red box. The footer is identical to the previous screenshot.

Step 11: For wireless setup, enter the wireless encryption used on your wireless network and click **Next** button.

D-Link DCS-932L Wireless N Day/Night Home Network Camera

1 Install Camera

2 Set Up Camera

3 Complete

Wired or Wireless?

How would you like to connect your camera to your network?

Wired - I want to connect my camera through a cable (wired connection)

Wireless - I want to connect my camera wirelessly (wireless connection)

Select a Wireless Network: DIR-655-Test

Key / Password:

(If no password is required, leave this blank.)

Retype your Key / Password:

Troubleshooting | Support | D-ViewCam | Manual | Quick Guide | Acrobat Reader | About | Exit

Copyright © D-Link Corporation Inc. All rights reserved.

Step 12: Please unplug the Ethernet cable from the back of your camera, then click **Continue** button. Please wait while the camera is restarting.


Your camera will now reboot.

Please unplug the Ethernet cable from the back of your camera, then click **Continue**.


Step 13: Select the radio button **"Yes, I already have a mydlink account"** if you already registered before or select the radio button on **No, I need to sign up for a new account if you did not register in mydlink yet.** Click **Next** button.

Step 14: Set-up is Complete. Click **Finish** button.


Step 15: You are now ready to access the camera using the mydlink account. Open your web browser and type <http://www.mydlink.com> on the address bar. Press the enter key on your keyboard.



Step 16: Click on **Sign In to mydlink**.

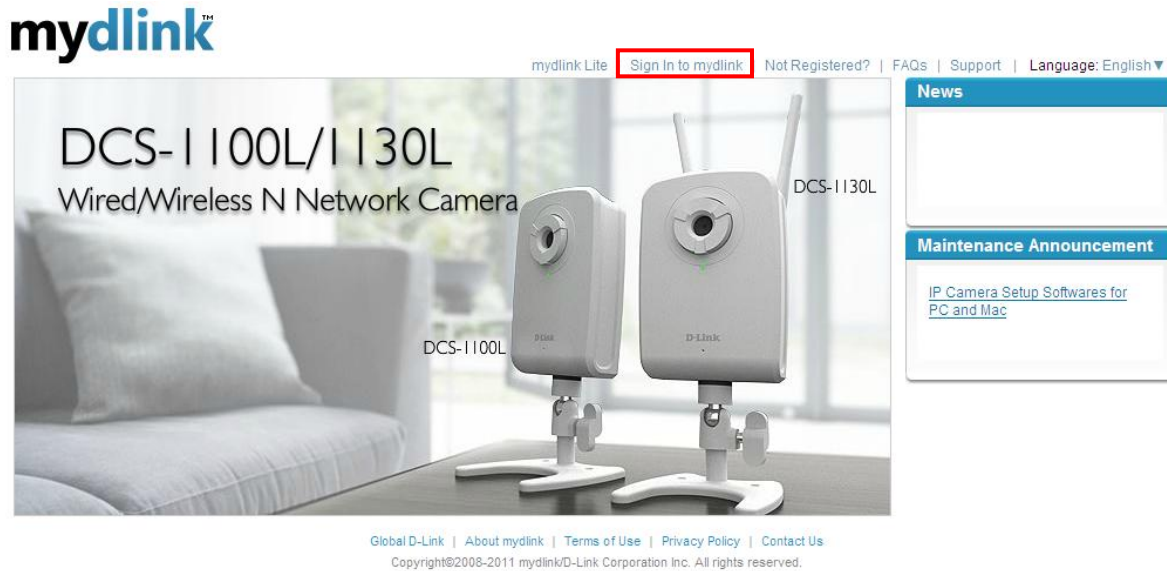

Step 17: Enter the E-Mail Address and the Password used to register on mydlink and then click on the **Sign In** button.

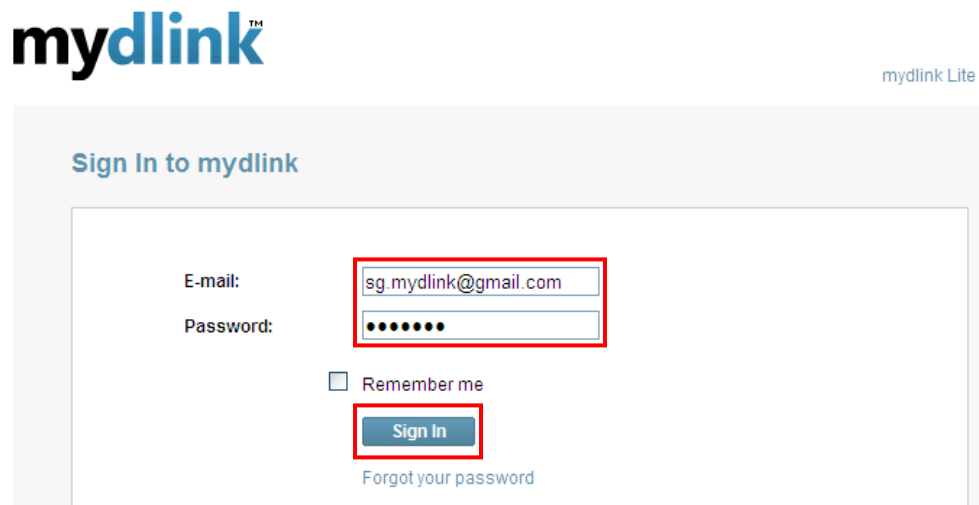

Step 18: The image of the camera will now show up on your mydlink account.




mydlink Lite | **My Devices** | My Profile | Sign out

My Devices

Delete Device

 DCS-932L 30156106	Live Video Camera Settings Camera Info
 DCS-1130L 30038262	

Live Video Mode



Remaining Time: 2 seconds ?

zoom in zoom out zoom 100%

Note: You may repeat the same procedure to add more mydlink ip cameras to your mydlink account.