

# **D-Link®** Technical Support Setup Procedure

---

FAQ : Setup Wizard - Setting Up DCS-930L & DCS-932L  
WITHOUT mydlink Account

Release date : 29/08/2011

Model Support : DCS-930L/DCS-932L


H/W:A1

S/W:1.00

# D-Link® Technical Support Setup Procedure

ตัวช่วยในการติดตั้ง(Wizard) การตั้งค่า DCS-1130L โดยปราศจากบัญชีผู้ใช้งาน mydlink

ขั้นตอนที่ 1: เรียกใช้งาน โปรแกรม CD Setup ที่มาพร้อมกับ DCS-1130L บนหน้าจอของ Setup-Wizard จะแสดงหน้าจอ ให้คุณคลิกปุ่ม Start

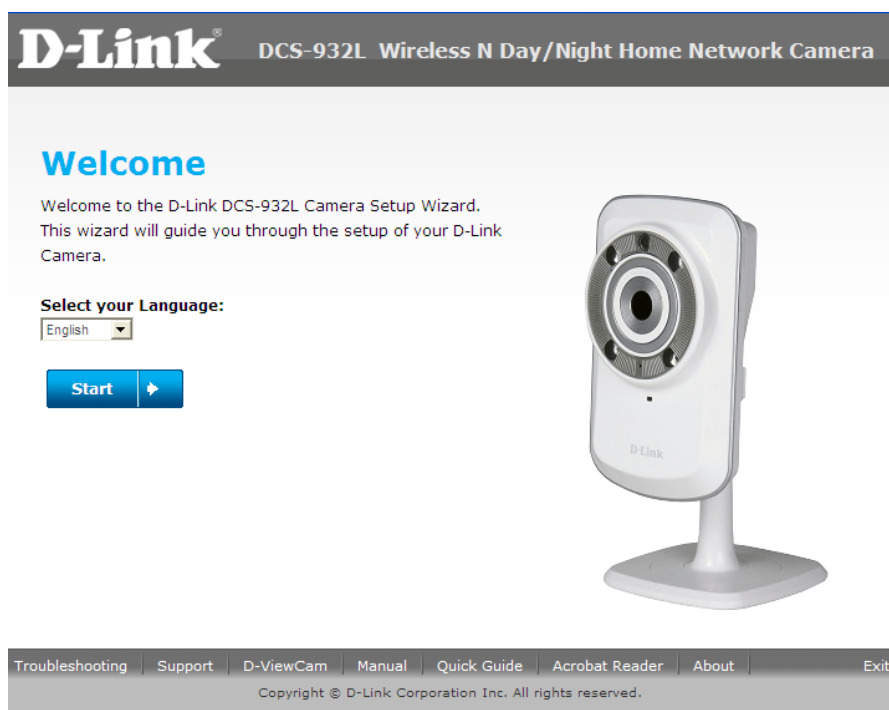

ขั้นตอนที่ 2: เลือกปุ่ม “No, my router does not have WPS Support” แล้วคลิกบนปุ่ม Next

1 Install Camera


2 Set Up Camera

3 Complete

## D-Link® DCS-932L Wireless N Day/Night Home Network Camera

### Does your router have a WPS button?

If your router has a **Wi-Fi Protected Setup (WPS)** button, you will be able to easily create a secure wireless connection between your camera and your router. Your router's WPS button is usually a small button located on the side of your router.



**Note:** If your router does not have a WPS button, you can still connect your camera wirelessly, but we will need to connect a cable to it first to configure it.

☐ Yes, my router has a WPS button  
☒ No, my router does not have a WPS button

Back Next

[Troubleshooting](#) | [Support](#) | [D-ViewCam](#) | [Manual](#) | [Quick Guide](#) | [Acrobat Reader](#) | [About](#) | [Exit](#)

Copyright © D-Link Corporation Inc. All rights reserved.

ขั้นตอนที่ 3 : ให้ทำการยึดส่วนของกล้องเข้ากับส่วนฐานหลังจากเคลื่อนย้ายกล้อง ไปยังตำแหน่งที่คุณต้องการ แล้วคลิกบนปุ่ม Next


1 Install Camera

2 Set Up Camera


3 Complete

## D-Link® DCS-932L Wireless N Day/Night Home Network Camera

### Let's set up your hardware



Turn the collar on the camera base counter-clockwise to loosen it.




After moving the camera to the position you want, tighten the collar by turning it clockwise.

Back Next

[Troubleshooting](#) | [Support](#) | [D-ViewCam](#) | [Manual](#) | [Quick Guide](#) | [Acrobat Reader](#) | [About](#) | [Exit](#)

Copyright © D-Link Corporation Inc. All rights reserved.


ขั้นตอนที่ 4 : เชื่อมโยงสายอีเทอร์เน็ตเคเบิลไปที่พอร์ตของ DCS-930L/DCS932L และเชื่อมโยงอีกด้านหนึ่งของสายเคเบิลไปที่พอร์ตที่สามารถใช้งานได้บนเราเตอร์ของคุณ คลิกปุ่ม Next

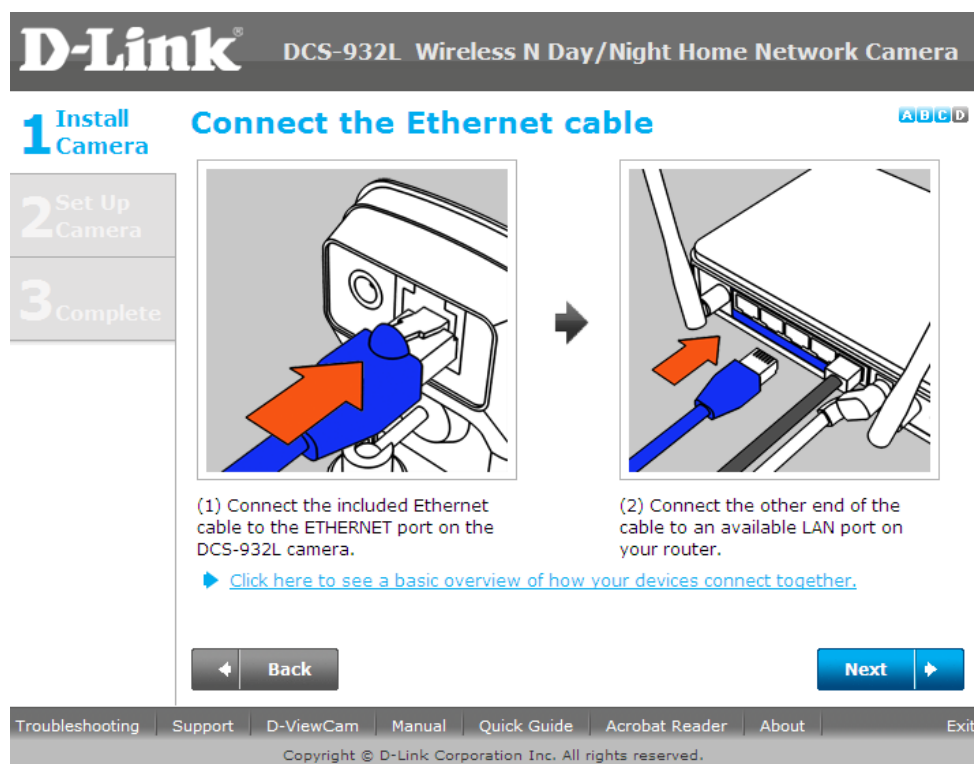


**ขั้นตอนที่ 5:** เชื่อมสายพาวเวอร์ไปยังช่องเสียบพาวเวอร์ซึ่งอยู่ด้านหลังของกล้อง DCS-930L/DCS-932L และเชื่อมต่ออะแดปเตอร์เข้ากับปลั๊กไฟ ตรวจสอบให้แน่ใจว่า ไฟ LED ที่อยู่ด้านหน้าของกล้องมีสถานะเป็นสีเขียวหนึ่งหลังจากเวลาผ่านไป 30 วินาที คลิกบนปุ่ม **Next**



**ขั้นตอนที่ 6:** หลังจากนั้นจะมีกล่องข้อความปรากฏขึ้น ให้ทำการตรวจสอบไฟ LED ที่อยู่ด้านหน้าของกล้องติดเป็นสีเขียวหนึ่ง กรณีไฟ LED ติดเป็นสีเขียวหนึ่ง ให้คลิกบนปุ่ม **Yes**

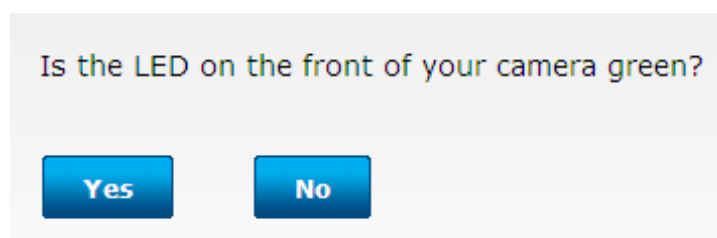

ขั้นตอนที่ 7: กรุณารอสักครู่ ขณะที่ตัวช่วยในการติดตั้ง (Wizard) กำลังค้นหากล้องบนเครือข่ายของคุณ

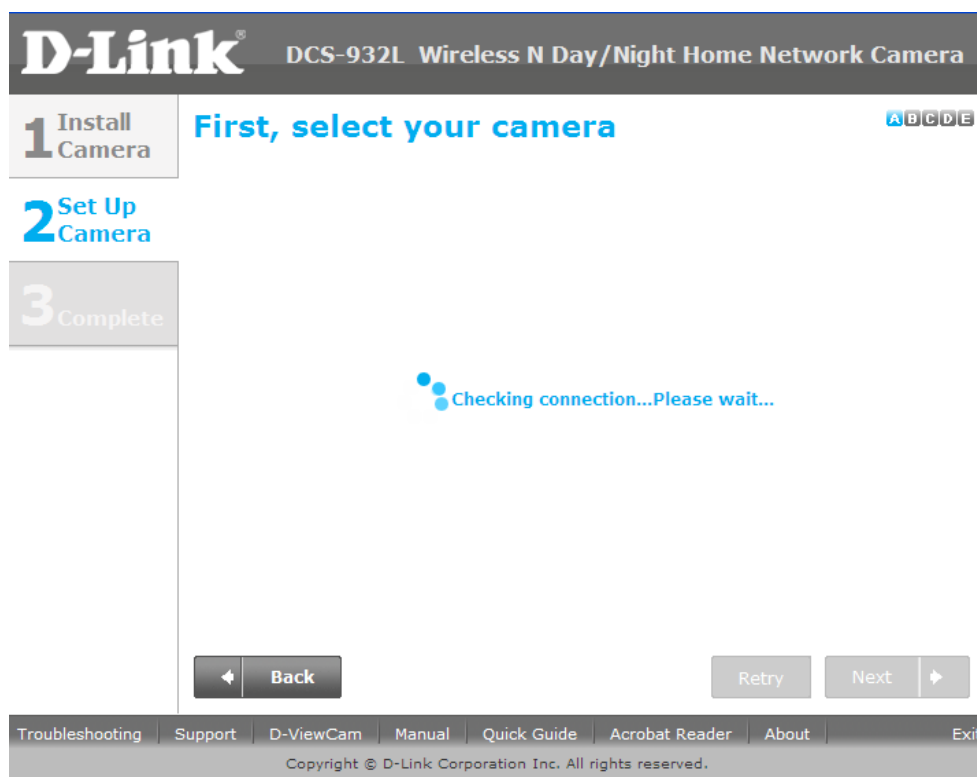

ขั้นตอนที่ 8: ตอนนี้คุณ将会เห็นข้อมูลเกี่ยวกับอุปกรณ์กล้อง โดยจะประกอบไปด้วยหมายเลขไอพี แอดเดรสและหมายเลขแม็คแอดเดรส คลิกบนปุ่ม **Next**

**D-Link** DCS-932L Wireless N Day/Night Home Network Camera

**1** Install Camera

**2** Set Up Camera

**3** Complete

**First, select your camera**

Device	MAC ID	IP Address	Connection
DCS-932L	F07D68041EA9	192.168.2.100	DHCP

☐ Not Configured  
☒ Configured

☒ Wired  
☐ Wireless

Check the **MAC ID** on the back of your camera to choose which camera you want to set up.

FCC ID: KK2CS930LA1  
 IC ID: 1111A-CS930LA1  
**MAC ID: 001122334455**

[Troubleshooting](#) | [Support](#) | [D-ViewCam](#) | [Manual](#) | [Quick Guide](#) | [Acrobat Reader](#) | [About](#) | [Exit](#)

Copyright © D-Link Corporation Inc. All rights reserved.

ขั้นตอนที่ 9: กรุณาใส่รหัสผ่านเพื่อรักษาความปลอดภัยของกล้องของคุณ คลิกบนปุ่ม **Next** เมื่อได้ทำการตั้งค่าเสร็จเรียบร้อยแล้ว

**1** Install Camera

**2** Set Up Camera

**3** Complete

## Set your camera's password

Please enter a password to secure your camera.

**Admin ID:**

**New Password:**

(Must be 6-8 characters, must contain at least 2 letters, case-sensitive, no spaces.)

**Confirm new password:**

[← Back](#) [Next →](#)

Troubleshooting | Support | D-ViewCam | Manual | Quick Guide | Acrobat Reader | About | Exit

Copyright © D-Link Corporation Inc. All rights reserved.



**ขั้นตอนที่ 10:** ถ้าคุณต้องการตั้งค่าเกี่ยวกับเครือข่ายไร้สายกับกล้องของคุณ ตรวจสอบให้แน่ใจว่าเราเตอร์ของคุณสนับสนุนฟังก์ชันเครือข่ายไร้สาย ถ้ารองรับให้คุณเลือกปุ่ม “I want to connect my camera wirelessly”. ในช่องของ Available Wireless Network ให้เลือกชื่อให้ตรงกับระบบเครือข่ายไร้สายของคุณ แล้วให้คลิกบนปุ่ม **Next**

ถ้าคุณต้องการเชื่อมต่อกล้องของคุณผ่านสายเคเบิ้ล กรุณาเลือก **Wired – I want to connect my camera through a cable (wired connection)** แล้วให้คลิกบนปุ่ม **Next**

**D-Link® DCS-932L Wireless N Day/Night Home Network Camera**

**1 Install Camera**

**2 Set Up Camera**

**3 Complete**

**Wired or Wireless?**

How would you like to connect your camera to your network?

☐ Wired - I want to connect my camera through a cable (wired connection)

☒ **Wireless - I want to connect my camera wirelessly (wireless connection)**

Select a Wireless Network:

dlink  
dlink\_54G+  
tydefault  
DIR-655-Test  
Hot\_Spot\_1  
devel05  
A9F1BDF1DAB1NVT4  
Custom...

Back

**Next**

Troubleshooting | Support | D-ViewCam | Manual | Quick Guide | Acrobat Reader | About | Exit

Copyright © D-Link Corporation Inc. All rights reserved.

**ขั้นตอนที่ 11:** สำหรับการตั้งเครือข่ายไร้สาย ใส่ค่ารหัสผ่านที่ได้มีการเข้ารหัส (encryption)เอาไว้ที่ใช้ในเครือข่ายไร้สายของคุณ หลังจากนั้นให้คลิกบนปุ่ม **Next**

**D-Link®** DCS-932L Wireless N Day/Night Home Network Camera

**1** Install Camera

**2** Set Up Camera

**3** Complete

### Wired or Wireless?

How would you like to connect your camera to your network?

☐ Wired - I want to connect my camera through a cable (wired connection)

☒ Wireless - I want to connect my camera wirelessly (wireless connection)

Select a Wireless Network: DIR-655-Test Rescan

Key / Password:

(If no password is required, leave this blank.)

Retype your Key / Password:

Back Next

Troubleshooting | Support | D-ViewCam | Manual | Quick Guide | Acrobat Reader | About | Exit

Copyright © D-Link Corporation Inc. All rights reserved.

**ขั้นตอนที่ 12:** กรุณาดึงสายแลนแบบอีเธอร์เน็ตออกจากด้านหลังของกล้องของคุณ หลังจากนั้นคลิกบนปุ่ม **Continue** กรุณารอขณะที่กล้องกำลังรีสตาร์ท

**Your camera will now reboot.**

Please unplug the Ethernet cable from the back of your camera, then click **Continue**.

Continue

**ขั้นตอนที่ 13:** เลือกปุ่ม “No , I need to sign up for a new account” กรณีสื่อข้อมูลด้านล่างเพื่อการ  
เข้าใช้งานสำหรับ บัญชีผู้ใช้งาน mydlink

E-mail : ใส่ค่าอีเมลแอดเดรสที่ถูกต้องและยังสามารถใช้งานได้อยู่สำหรับ  
เริ่มต้นการใช้งาน (Activation)

Password: ใส่รหัสผ่านอย่างน้อย 6 ตัวอักษร และรหัสผ่านเป็นแบบอักษรตัว  
เล็กใหญ่มีความแตกต่างกัน (case sensitive)

Retype password : พิมพ์รหัสผ่านอีกครั้ง

First Name : ใส่ชื่อของบุคคลที่ใช้ในการลงทะเบียนบัญชีผู้ใช้งาน

Last Name : ใส่นามสกุลของบุคคลที่ใช้ในการลงทะเบียนบัญชีผู้ใช้งาน

- ทำเครื่องหมายเลือกบน ***"I accept the mydlink terms and conditions"***.
- คลิกบนปุ่ม Next

**1** Install Camera

**2** Set Up Camera

**3** Complete

**Let's add your camera to your mydlink account** ABCDE

Adding your camera to your [mydlink.com](http://mydlink.com) account will allow you to access your camera through the Internet.

**Do you have a mydlink account?**

☐ Yes, I already have a mydlink account.

☒ **No, I need to sign up for a new account.** **1**

Please enter the following information to sign up for a mydlink account:

**E-mail:**

**Password:**

**Retype password :**

**First Name:**

**Last Name:**


At least 6 characters, and is case-sensitive.

**3** ☒ **I accept the [mydlink terms and conditions](#).**


**4** **Next**

**Back**

ขั้นตอนที่ 14: อีเมลเพื่อยืนยันจะถูกส่งไปอีเมลแอดเดรสของคุณ คลิกที่ปุ่ม OK เพื่อดำเนินการต่อไป

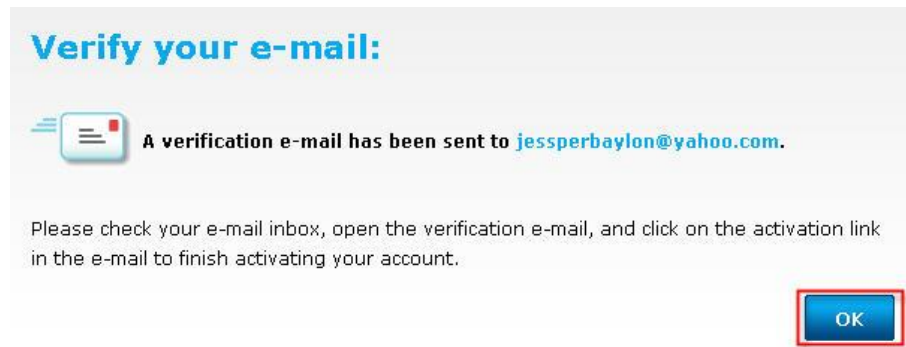

ขั้นตอนที่ 15: การตั้งค่าเรียบร้อยแล้ว คลิกบนปุ่ม Finish

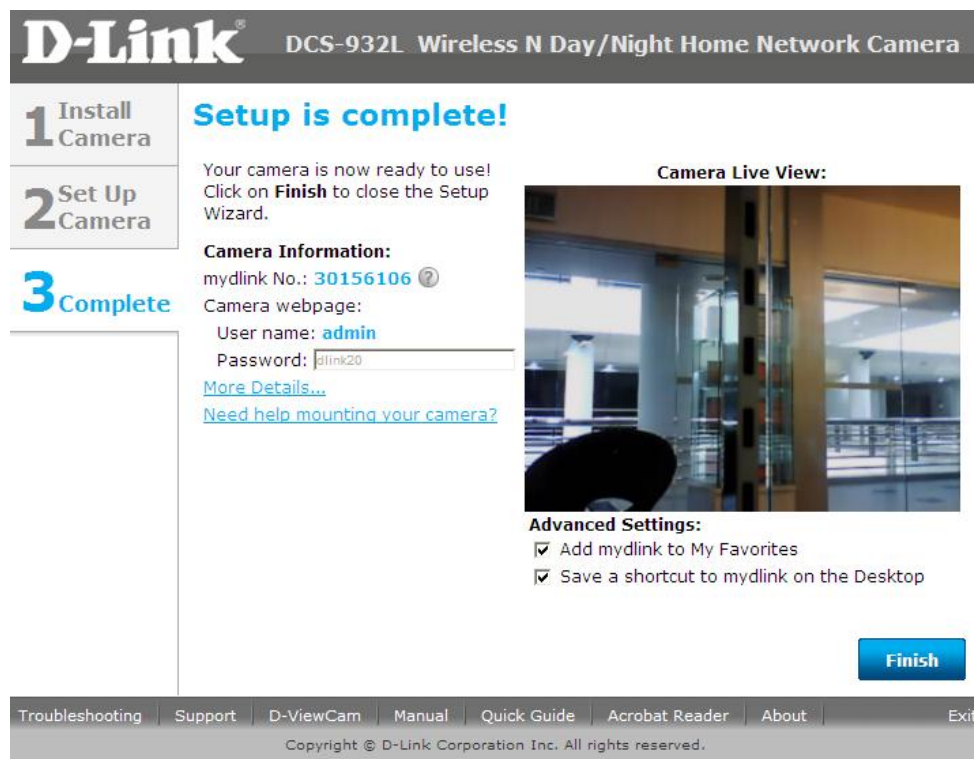

**ขั้นตอนที่ 16:** ล็อกอินไปที่อีเมลแอดเดรสของคุณและตรวจสอบอีเมลที่ได้อีกส่งมาจาก mydlink ภายในข้อความ ให้คลิกลิงก์เพื่อเริ่มต้น (activate) การใช้งานบัญชีผู้ใช้งาน mydlink ของคุณ

**Welcome to mydlink!**

• Wed, February 16, 2011 7:48:01 AM

From: mydlink <mydlink@mydlink.com> [Add to Contacts](#)  
To: jessperbaylon@yahoo.com

Hello Jessper,

Thank you for joining mydlink.

To activate your mydlink account, please click the link below:

[http://sq.mydlink.com/activated\\_account/code=c81a819f6e56240853c01883c240448b](http://sq.mydlink.com/activated_account/code=c81a819f6e56240853c01883c240448b)

If clicking the link doesn't work, copy and paste the URL address into Internet Explorer.

After activating your account, you will be able to sign in to [sq.mydlink.com](http://sq.mydlink.com) using the e-mail address and password you provided during the signup or Installation wizard

If you have received this e-mail in error, please ignore this e-mail and we apologize for th [sq.mydlink.com](http://sq.mydlink.com).

=====  
This e-mail message was sent from a notification-only address that cannot accept incoming e-mail. Please do not reply to this message.  
If you have any questions, please contact mydlink customer service at [sq.mydlink.com/content/contact](http://sq.mydlink.com/content/contact)  
=====

ขั้นตอนที่ 17: เว็บเพจจะเชื่อมโยง (re-direct) ไปยังเว็บไซต์ของ mydlink คลิกบนปุ่ม Start mydlink

**mydlink™**

mydlink Signup Complete


**Congratulations!** Your account is now active and your device was successfully activated.

mydlink Account: jessperbayon@yahoo.com


**Getting started with mydlink: ActiveX**

After clicking the "Start mydlink" button at the bottom-right, you may see this message appear at the top of your browser window when trying to view live video:

**Step 1:**

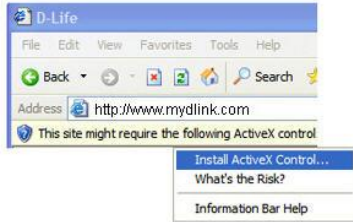

**Step 2:**



Click "Install" in the Internet Explorer - Security Warning window that appears. The ActiveX Control will automatically install, and you are now ready to enjoy mydlink!

If you see this message appear, click on the message, then click on "Install ActiveX Control..."

**Start mydlink**


ขั้นตอนที่ 18: ตอนนี้ภาพของกล้องจะแสดงบนบัญชีผู้ใช้งานของ mydlink ของคุณ

**mydlink™**


mydlink Lite | My Devices | My Profile | Sign out

**My Devices**

Delete Device



DCS-932L  
30156106




DCS-1130L  
30038262

Live Video

Camera Settings

Camera Info

Live Video Mode



Remaining Time: 2 seconds

zoom in zoom out zoom 100%


**Note :** คุณอาจจะทำวิธีการเดียวกันอีกครั้งหนึ่ง เพื่อเพิ่มกล้อง mydlink อื่น ๆ ไปยังบัญชีผู้ใช้งาน mydlink ของคุณ

FAQ : Setup Wizard - Setting Up DCS-930L & DCS-932L WITHOUT mydlink Account


# D-Link® Technical Support Setup Procedure

## Setup Wizard - Setting Up DCS-930L & DCS-932L WITHOUT mydlink Account

**Step 1:** Run the CD Set-Up that came with the DCS-930L/DCS-932L. Click **Autorun** to run mydlink Set-Up Wizard. On the mydlink Set-Up Wizard screen, click **Start** button.

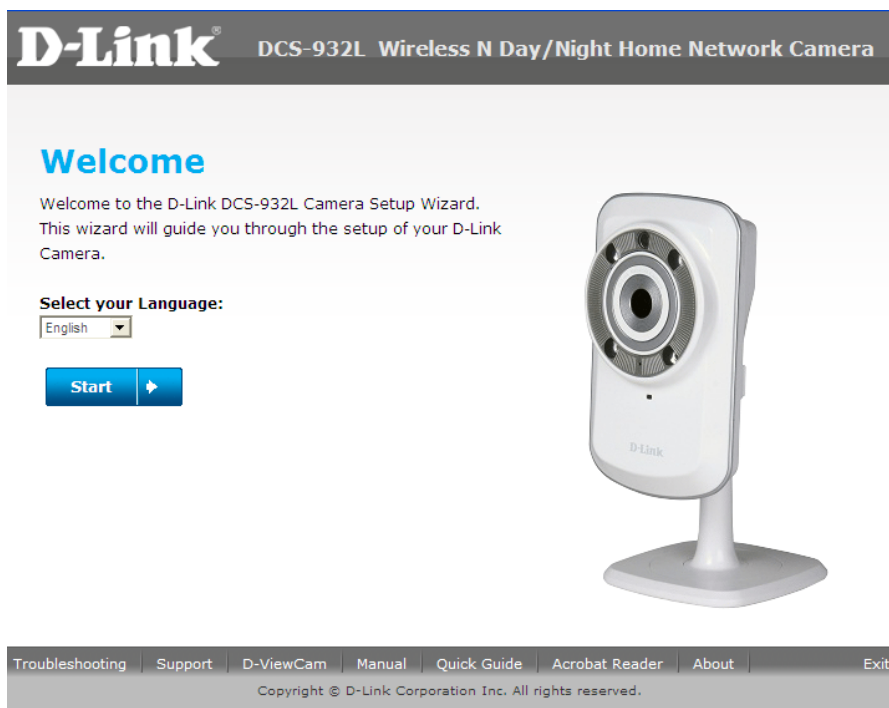

**Step 2:** Select the radio button **"No, my router does not have WPS Support"**. Click **Next** button.

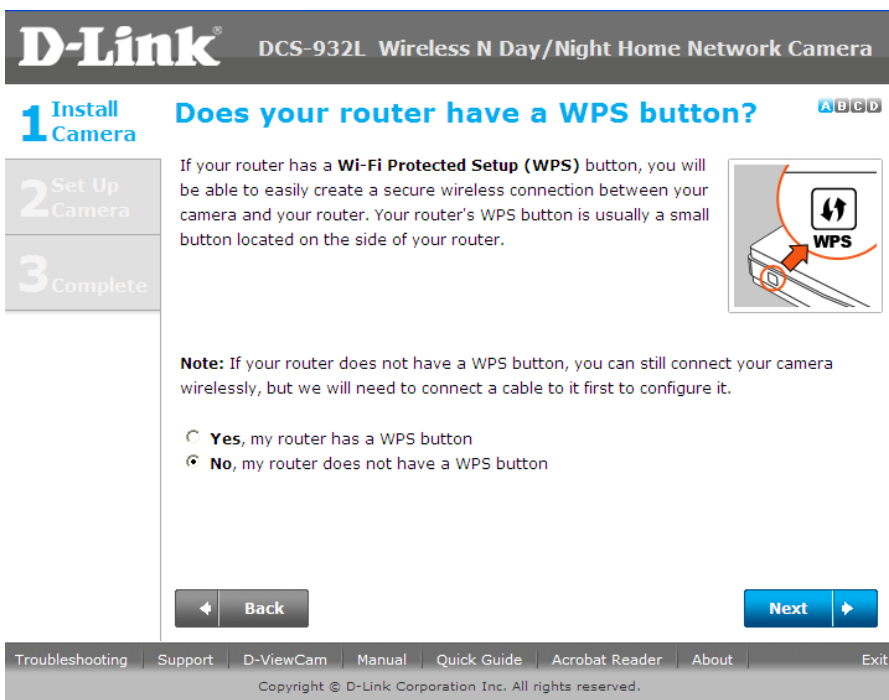

FAQ : Setup Wizard - Setting Up DCS-930L & DCS-932L WITHOUT mydlink Account



**Step 3:** Tighten the collar on the camera base after moving the camera to the position you want. Click **Next** button.

D-Link® DCS-932L Wireless N Day/Night Home Network Camera


1 Install Camera

Let's set up your hardware


A B C D

2 Set Up Camera

3 Complete



Turn the collar on the camera base counter-clockwise to loosen it.



After moving the camera to the position you want, tighten the collar by turning it clockwise.

← Back
Next →

Troubleshooting
Support
D-ViewCam
Manual
Quick Guide
Acrobat Reader
About
Exit

Copyright © D-Link Corporation Inc. All rights reserved.

**Step 4:** Connect the included Ethernet cable to the port on the DCS-930L/DCS-932L camera. Connect the other end of the cable to an available LAN port on your router. Click **Next** button.

D-Link® DCS-932L Wireless N Day/Night Home Network Camera


1 Install Camera

Connect the Ethernet cable


A B C D

2 Set Up Camera

3 Complete



(1) Connect the included Ethernet cable to the ETHERNET port on the DCS-932L camera.



(2) Connect the other end of the cable to an available LAN port on your router.

▶ [Click here to see a basic overview of how your devices connect together.](#)

← Back
Next →

Troubleshooting
Support
D-ViewCam
Manual
Quick Guide
Acrobat Reader
About
Exit

Copyright © D-Link Corporation Inc. All rights reserved.

FAQ : Setup Wizard - Setting Up DCS-930L & DCS-932L WITHOUT mydlink Account



**Step 5:** Attach the power adapter to the power jack on the back of the DCS-930L/DCS-932L camera, and connect the power adapter to a power outlet. Ensure that the **Status** LED on the front of the camera is solid green after 30 seconds. Click **Next** button.


**D-Link®** DCS-932L Wireless N Day/Night Home Network Camera

**1** Install Camera

2 Set Up Camera

3 Complete

### Connect the power adapter

(1) Connect the power adapter to the power jack on the back of the camera and plug the other end into the power outlet.

(2) The LED on the front of the camera will turn green when the device is ready.

[What do I do if the LED stays red?](#)

ABCD

◀ Back

Next ▶

[Troubleshooting](#) | [Support](#) | [D-ViewCam](#) | [Manual](#) | [Quick Guide](#) | [Acrobat Reader](#) | [About](#) | [Exit](#)

Copyright © D-Link Corporation Inc. All rights reserved.


**Step 6:** A pop up message will appear. Please check if the LED on the front of the camera lit is solid green. Click **Yes** button if it is solid green.

Is the LED on the front of your camera green?


Yes

No

**Step 7:** Please wait while the Wizard is detecting the camera on your network.

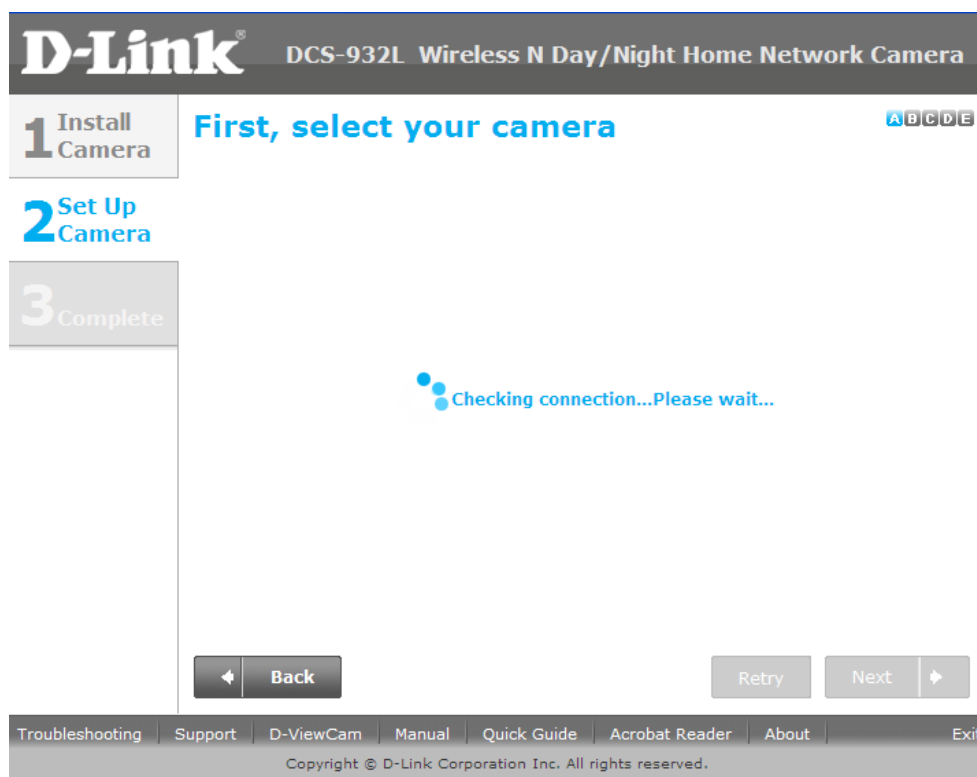

**Step 8:** You will now see the camera device information with its corresponding IP Settings and MAC Address. Click **Next** button.

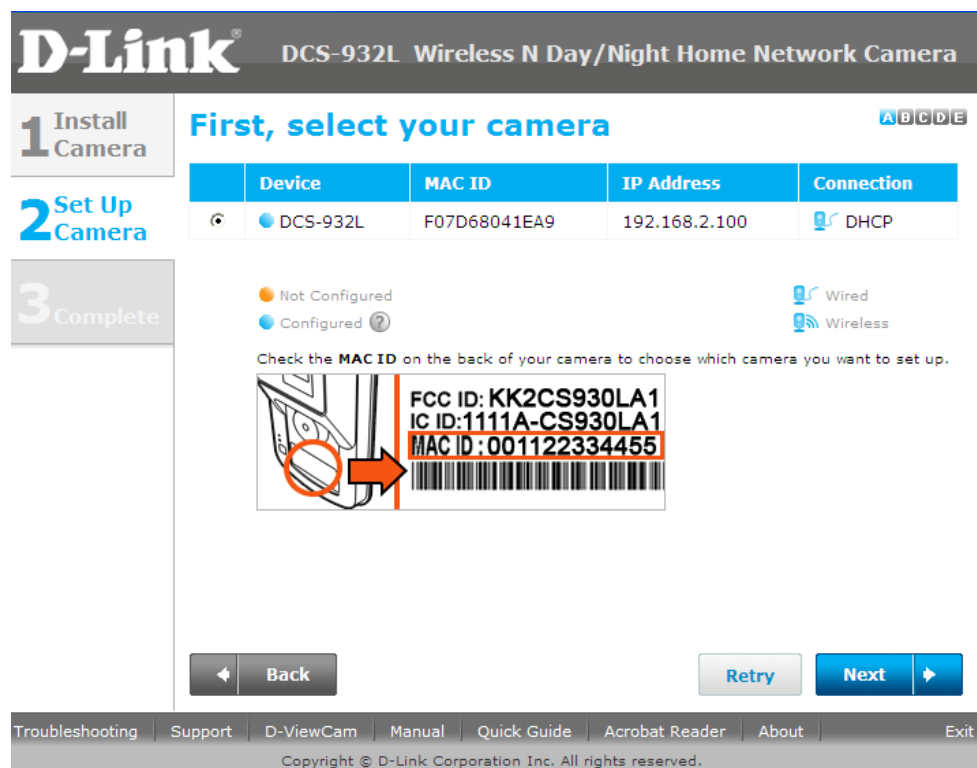

FAQ : Setup Wizard - Setting Up DCS-930L & DCS-932L WITHOUT mydlink Account

**Step 9:** Please enter a password to secure you camera. Click **Next** button when done.

**Step 10:** If you want to setup your camera wirelessly, make sure that your router supports wireless. If so, select the radio button **"I want to connect my camera wirelessly"**. On the Available Wireless Network, select the name of your wireless network and click **Next** button.

If you want to connect your camera via a network cable, please select **"Wired – I want to connect my camera through a cable (wired connection)"**. Click **Next** button.

FAQ : Setup Wizard - Setting Up DCS-930L & DCS-932L WITHOUT mydlink Account

**Step 11:** For wireless setup, enter the wireless encryption used on your wireless network and click **Next** button.

**D-Link® DCS-932L Wireless N Day/Night Home Network Camera**

**1 Install Camera**

**2 Set Up Camera**

**3 Complete**

### Wired or Wireless?

How would you like to connect your camera to your network?

☐ **Wired** - I want to connect my camera through a cable (wired connection)

☒ **Wireless** - I want to connect my camera wirelessly (wireless connection)

Select a Wireless Network: DIR-655-Test [Rescan](#)

**Key / Password:** [Masked] (If no password is required, leave this blank.)

**Retype your Key / Password** [Masked]

[Back](#) [Next](#)

Troubleshooting | Support | D-ViewCam | Manual | Quick Guide | Acrobat Reader | About | Exit

Copyright © D-Link Corporation Inc. All rights reserved.

**Step 12:** Please unplug the Ethernet cable from the back of your camera, then click **Continue** button. Please wait while the camera is restarting.

**Your camera will now reboot.**

Please unplug the Ethernet cable from the back of your camera, then click **Continue**.

[Continue](#)


**Step 13:** Select the radio button **"No, I need to sign up for a new account"**. Please enter the following information to sign up for a mydlink account;

**E-Mail** : Enter a valid and working email address for activation  
**Password** : Enter at least 6 characters (case sensitive)  
**Retype Password** : Retype the password created  
**First Name** : Enter the name of the person to register the account  
**Last Name** : Enter the surname of the person to register the account

- Put a check mark on **"I accept the mydlink terms and conditions"**.
- Click **Next** button.

**Step 14:** A verification e-mail has been sent to your e-mail address. Click **OK** button to continue.

**Step 15:** Set-up is Complete. Click **Finish** button.

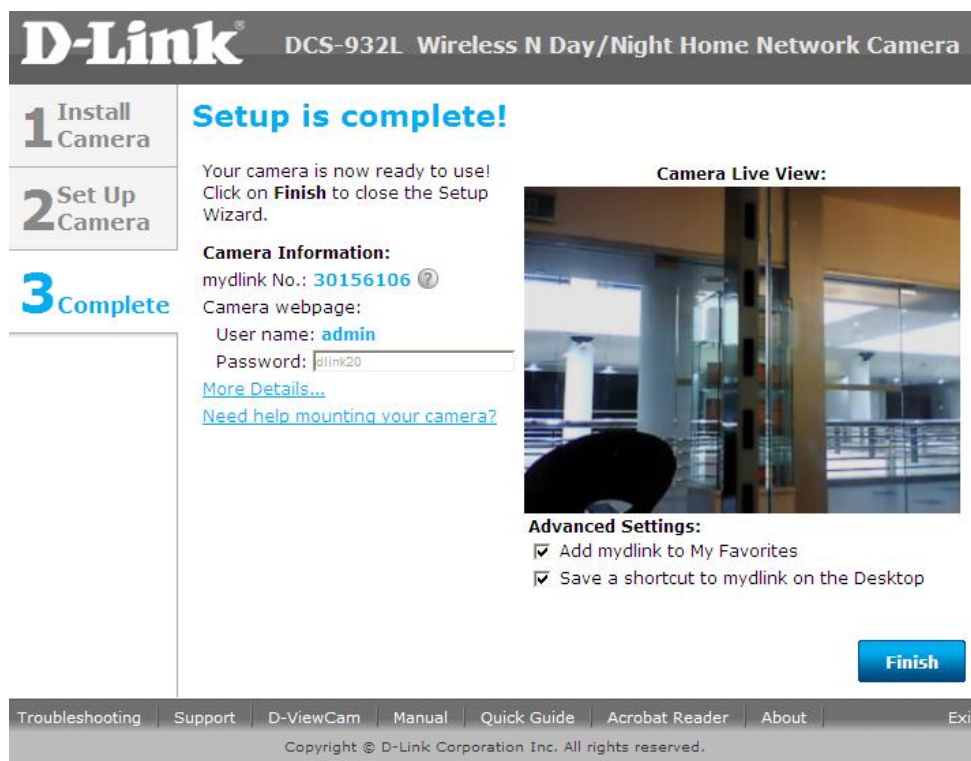

**Step 16:** Log-in to your e-mail address and check the e-mail received from mydlink. On the message, click on the link provided to activate your mydlink account.

**Welcome to mydlink!**

Wed, February 16, 2011 7:48:01 AM

From: mydlink <mydlink@mydlink.com> Add to Contacts  
To: jessperbaylon@yahoo.com

Hello Jessper,

Thank you for joining mydlink.

To activate your mydlink account, please click the link below:

[http://sq.mydlink.com/activated\\_account/code=c81a819f6e56240853c01883c240448b](http://sq.mydlink.com/activated_account/code=c81a819f6e56240853c01883c240448b)

If clicking the link doesn't work, copy and paste the URL address into Internet Explorer.

After activating your account, you will be able to sign in to [sq.mydlink.com](http://sq.mydlink.com) using the e-mail address and password you provided during the signup or Installation wizard

If you have received this e-mail in error, please ignore this e-mail and we apologize for th [sq.mydlink.com](http://sq.mydlink.com).

=====  
This e-mail message was sent from a notification-only address that cannot accept incoming e-mail. Please do not reply to this message.  
If you have any questions, please contact mydlink customer service at [sq.mydlink.com/content/contact](http://sq.mydlink.com/content/contact)  
=====

**Step 17:** It will now re-direct you to the mydlink web page. Click **Start mydlink** button.



**mydlink Signup Complete**


**Congratulations!** Your account is now active and your device was successfully activated.

mydlink Account: jessperbayton@yahoo.com

**Getting started with mydlink: ActiveX**


After clicking the "Start mydlink" button at the bottom-right, you may see this message appear at the top of your browser window when trying to view live video:

**Step 1:**

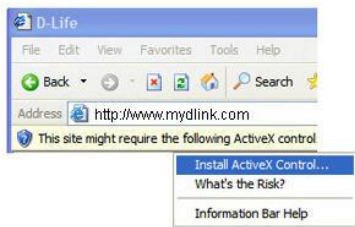

If you see this message appear, click on the message, then click on "Install ActiveX Control..."

**Step 2:**



Click "Install" in the Internet Explorer - Security Warning window that appears. The ActiveX Control will automatically install, and you are now ready to enjoy mydlink!

**Start mydlink**

**Step 18:** The image of the camera will now show-up on your mydlink account.



mydlink Lite | **My Devices** | My Profile | Sign out

**My Devices**


Delete Device

**DCS-932L**  
30156106

**DCS-1130L**  
30038262

**Live Video** | Camera Settings | Camera Info

Live Video Mode

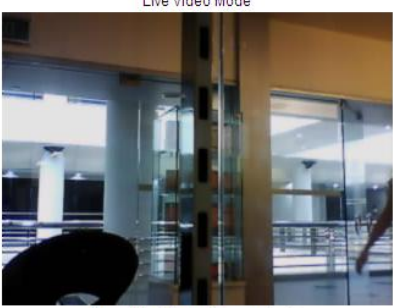

Remaining Time: 2 seconds ?

zoom in   zoom out   zoom 100%

**Note:** You may repeat the same procedure to add more mydlink ip cameras to your mydlink account.

FAQ : Setup Wizard - Setting Up DCS-930L & DCS-932L WITHOUT mydlink Account

## ฝ่ายสนับสนุนทางด้านเทคนิค

Call Center หมายเลขโทรศัพท์ 02-6617997

ภาษาไทย : จันทร์ ถึง ศุกร์ เวลา 9.00 น. – 18.00 น.

Thai : Mon – Fri : Time 9.00 – 18.00.

ภาษาอังกฤษ : เสาร์ , อาทิตย์ , วันหยุดนักษัตฤกษ์ และ วันธรรมดา หลัง 18.00 น.

English : Sat – Sun , Public Holiday and after 18.00 weekday.

Website : [www.dlink.co.th](http://www.dlink.co.th)

email: [support@dlink.com.sg](mailto:support@dlink.com.sg)

Facebook : <http://www.facebook.com/DLinkThailandFans>



## **Nationwide D-Link Service Centres**

### **Chiang Mai Branch**

2/1 Moo 3, Chiang Mai-Lampang Road  
Tumbon Chang Pueak, Amphoe Mueang Chiang Mai  
Changwat Chiang Mai 50300,  
Thailand

Tel : +66 (0) 5340-9482-6

Fax : +66 (0) 5340-9486

Operating hours:

Mondays till Friday

9am to 6pm

### **Phitsanulok Branch**

117/7 Praongdam Road  
Tumbon Nai Mueang,  
Amphoe Mueang Phitsanulok  
Changwat Phitsanulok 65000, Thailand

Tel : +66 (0) 5521-2323-5

Fax : +66 (0) 5521-2326

Operating hours:

Mondays till Friday

9am to 6pm

### **Cham Issara Tower II**

3rd Floor, Cham Issara Tower II  
2922/138 New Perchburi Road  
Khwang Bangkokpi, Khet Huay-Kwang,  
Bangkok 10320, Thailand

Tel : +66 (0) 2308-2040

Fax : +66 (0) 2308-2024

Call Center : +66 (0) 2716-6669

Operating hours:

Mondays till Friday

9am to 6pm

### **Pantip Plaza Branch**

4th Fl. Pantip Plaza 604/3 Petchburi Road Room  
439-440

Kwang Thanon Petchburi, Khet Ratchathewi

Bangkok 10400, Thailand

Tel : +66 (0) 2656 6037

Tel : +66 (0) 2656 6054

Fax : +66 (0) 2656 6042

Operating hours:

Mondays till Sunday

10am to 7pm

### **Rayong Branch**

217/24 Sukhumvit Road  
Tumbon Noen Phra,  
Amphoe Mueang Rayong  
Changwat Rayong 21000, Thailand

Tel : +66 (0) 3880-0631-3

Fax : +66 (0) 3880-0634

Operating hours:

Mondays till Sunday

9am to 6pm

### **Surat Thani Branch**

412/8 Talat Mai Road  
Tumbon Talat,  
Amphoe Mueang Surat Thani  
Changwat Surat Thani 84000, Thailand

Tel : +66 (0) 7721-7907-10

Fax : +66 (0) 7721-7910

Operating hours:

Mondays till Friday

9am to 6pm

### **Phuket Branch**

156/3 Phang Nga Road  
Tumbon Taratyai,  
Amphoe Mueang Phuket  
Changwat Phuket 83000, Thailand

Tel : +66 (0) 7623-2906-9

Fax : +66 (0) 7623-2909

Operating hours:

Mondays till Friday

9am to 6pm

### **Hat Yai Branch**

48/106 Phadungpakdee Road  
Tumbon Hatyai, Amphoe Hatyai  
Changwat Songkhla 90110, Thailand

Tel : +66 (0) 7435-4559-61

Fax : +66 (0) 7435-4561

Operating hours:

Mondays till Friday

9am to 6pm