

FAQ : Setup Wizard - Setting Up DCS-930L & DCS-932L
WITH mydlink Account

Release date : 29/08/2011

Model Support : DCS-930L/DCS-932L


H/W:A1

S/W:1.00


D-Link® Technical Support Setup Procedure

ตัวช่วยในการติดตั้ง(Wizard) การตั้งค่า DCS-930L & DCS-932L
เพื่อทำงานกับบัญชีผู้ใช้งาน mydlink


ขั้นตอนที่ 1: เรียกใช้งาน โปรแกรม CD Setup ที่มาพร้อมกับ DCS-930L/DCS-932L คลิก Autorun เพื่อเรียกใช้งานตัวช่วยในการติดตั้ง บนหน้าจอของ Setup-Wizard จะแสดงหน้าจอ ให้คุณคลิกปุ่ม Start

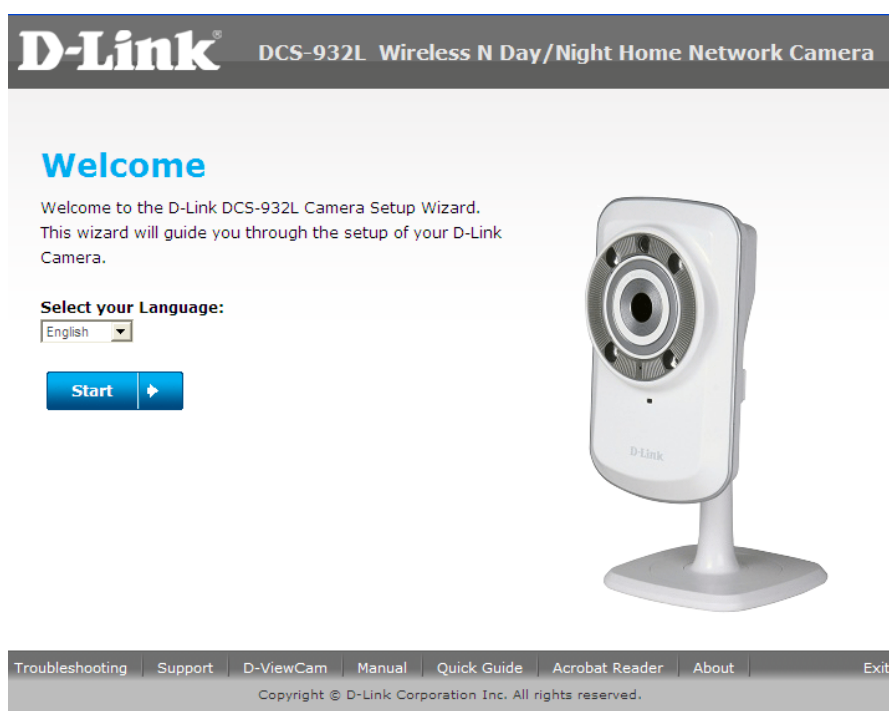

ขั้นตอนที่ 2: เลือกปุ่ม “No, my router does not have WPS Support” แล้วคลิกบนปุ่ม Next.

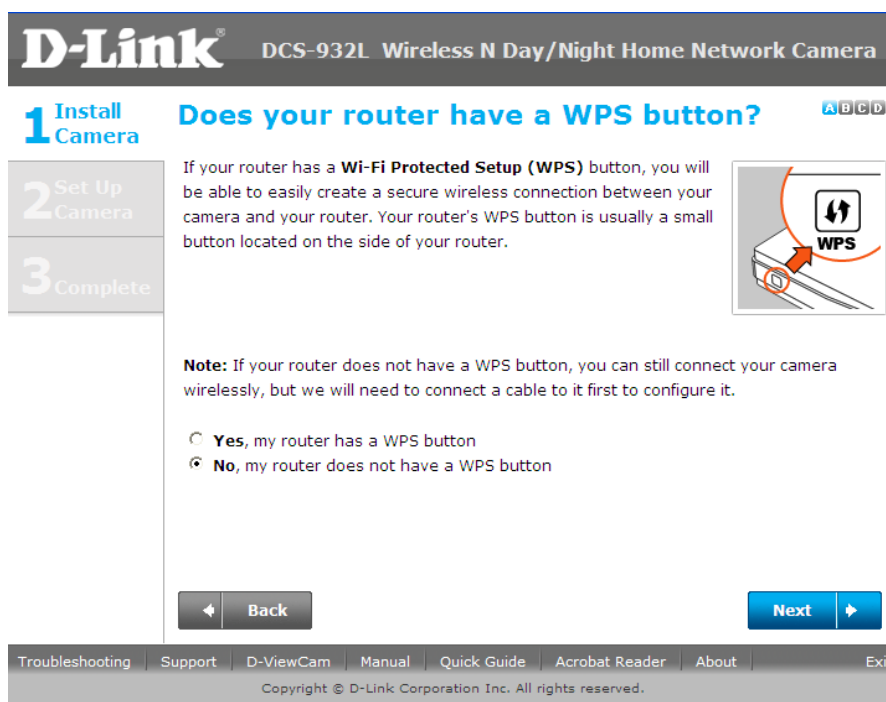

ขั้นตอนที่ 3 : ให้ทำการยึดส่วนของกล้องเข้ากับส่วนฐานหลังจากเคลื่อนย้ายกล้อง ไปยังตำแหน่งที่คุณต้องการ แล้วคลิกบนปุ่ม Next

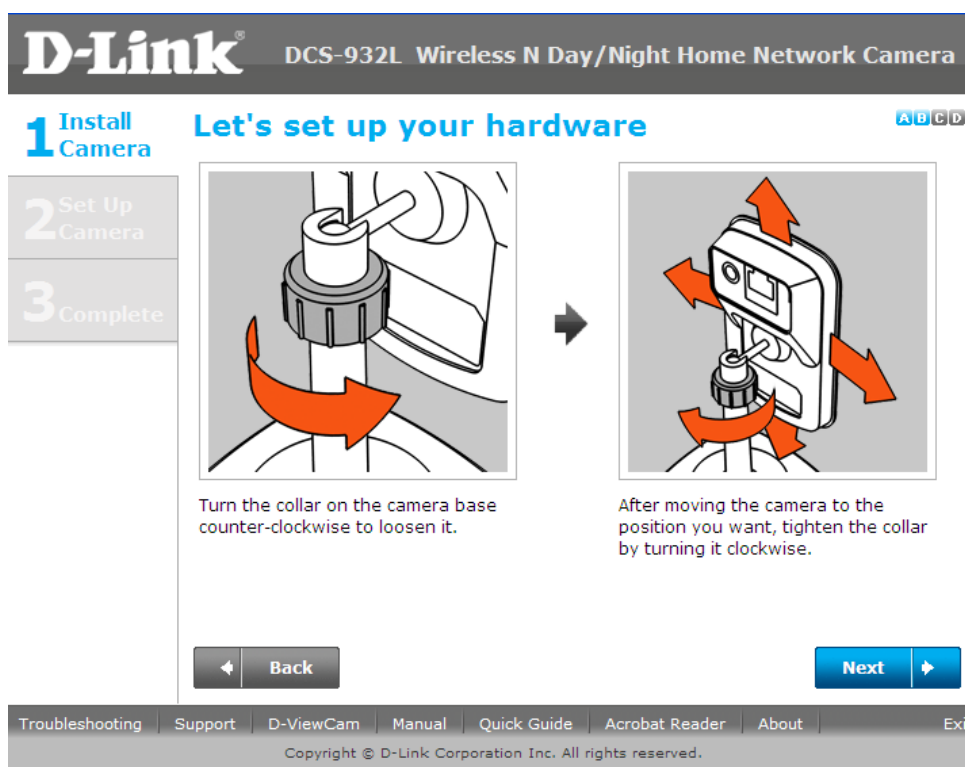


ขั้นตอนที่ 4 : เชื่อมโยงสายอีเทอร์เน็ตเคเบิลไปที่พอร์ตของ DCS-930L/DCS932L และเชื่อมโยงอีกด้านหนึ่งของสายเคเบิลไปที่พอร์ตที่สามารถใช้งานได้บนเราเตอร์ของคุณ คลิกปุ่ม Next

D-Link® DCS-932L Wireless N Day/Night Home Network Camera

1 Install Camera **Connect the Ethernet cable** A B C D

2 Set Up Camera

3 Complete

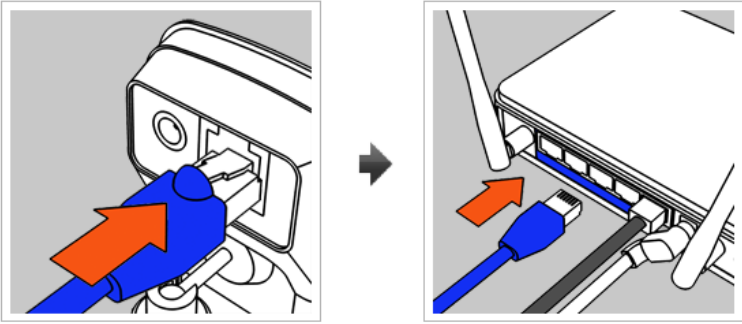

(1) Connect the included Ethernet cable to the ETHERNET port on the DCS-932L camera.

(2) Connect the other end of the cable to an available LAN port on your router.

[Click here to see a basic overview of how your devices connect together.](#)

Back Next

Troubleshooting | Support | D-ViewCam | Manual | Quick Guide | Acrobat Reader | About | Exit

Copyright © D-Link Corporation Inc. All rights reserved.

ขั้นตอนที่ 5: เชื่อมสายเพาเวอร์ไปยังช่องเสียบเพาเวอร์ซึ่งอยู่ด้านหลังของกล้อง DCS-930L/DCS-932L และเชื่อมต่ออะแดปเตอร์เข้ากับปลั๊กไฟ ตรวจสอบให้แน่ใจว่า ไฟ LED ที่อยู่ด้านหน้าของกล้องมีสถานะเป็นสีเขียวหนึ่งหลังจากเวลาผ่านไป 30 วินาที **คลิกบนปุ่ม Next**

D-Link DCS-932L Wireless N Day/Night Home Network Camera

1 Install Camera **Connect the power adapter** ABCD

2 Set Up Camera

3 Complete

(1) Connect the power adapter to the power jack on the back of the camera and plug the other end into the power outlet.

(2) The LED on the front of the camera will turn green when the device is ready.

! [What do I do if the LED stays red?](#)

Back Next

Troubleshooting | Support | D-ViewCam | Manual | Quick Guide | Acrobat Reader | About | Exit


Copyright © D-Link Corporation Inc. All rights reserved.

ขั้นตอนที่ 6: หลังจากนั้นจะมีกล่องข้อความปรากฏขึ้น ให้ทำการตรวจสอบไฟ LED ที่อยู่ด้านหน้าของกล้องติดเป็นสีเขียวหนึ่ง กรณีไฟ LED ติดเป็นสีเขียวหนึ่ง ให้คลิกบนปุ่ม **Yes**

Is the LED on the front of your camera green?

Yes No

ขั้นตอนที่ 7: กรณารอสักครู่ ขณะที่ตัวช่วยในการติดตั้ง (Wizard) กำลังค้นหากล้องบนเครือข่ายของคุณ

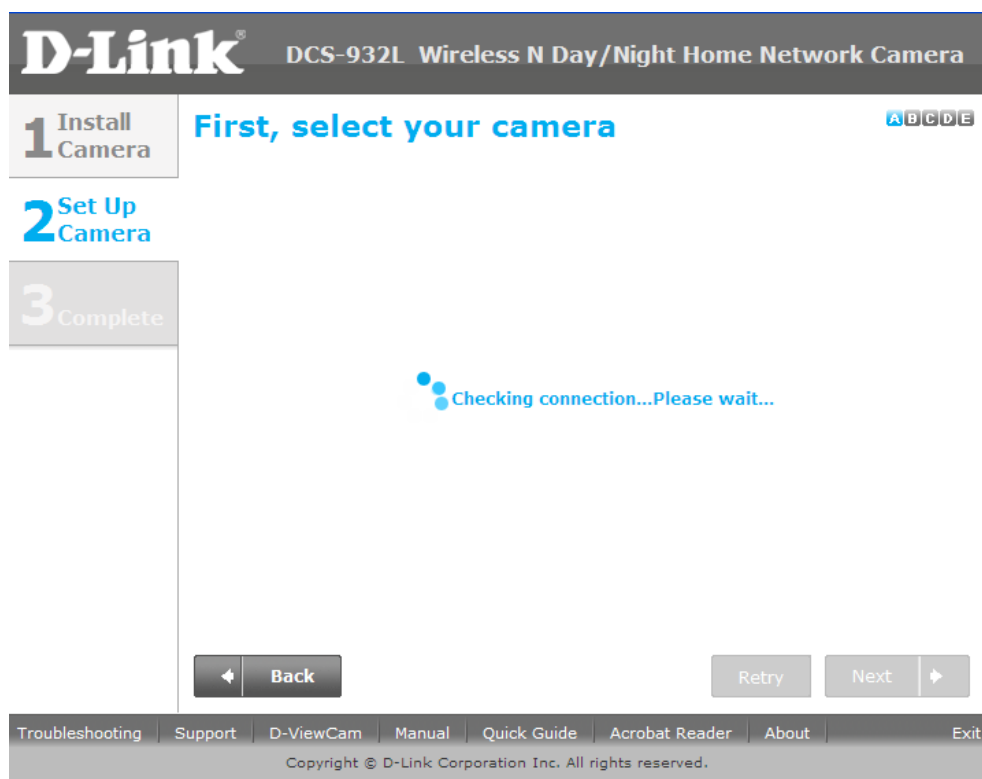

ขั้นตอนที่ 8: ตอนนี้คุณจะเห็นข้อมูลเกี่ยวกับอุปกรณ์กล้อง โดยจะประกอบไปด้วยหมายเลขไอพี แอดเดรสและหมายเลขแม็คแอดเดรส คลิกบนปุ่ม **Next**

D-Link DCS-932L Wireless N Day/Night Home Network Camera

1 Install Camera

2 Set Up Camera

3 Complete

First, select your camera

Device	MAC ID	IP Address	Connection
<input checked="" type="radio"/> DCS-932L	F07D68041EA9	192.168.2.100	<input checked="" type="checkbox"/> DHCP

Not Configured Configured ?

Wired Wireless

Check the **MAC ID** on the back of your camera to choose which camera you want to set up.

FCC ID: KK2CS930LA1
IC ID: 1111A-CS930LA1
MAC ID: 001122334455

Troubleshooting | Support | D-ViewCam | Manual | Quick Guide | Acrobat Reader | About | Exit


Copyright © D-Link Corporation Inc. All rights reserved.

ขั้นตอนที่ 9: กรุณาใส่รหัสผ่านเพื่อรักษาความปลอดภัยของกล้องของคุณ คลิกบนปุ่ม **Next** เมื่อได้ทำการตั้งค่าเสร็จเรียบร้อยแล้ว

The screenshot displays the 'Set your camera's password' step of the installation wizard. On the left, a vertical progress bar shows three steps: '1 Install Camera', '2 Set Up Camera' (which is highlighted in blue), and '3 Complete'. The main content area has the title 'Set your camera's password' in blue, with a small 'ABCDE' icon to its right. Below the title, it says 'Please enter a password to secure your camera.' There are three input fields: 'Admin ID:' with the text 'admin', 'New Password:' with six dots, and 'Confirm new password:' with six dots. A note in blue text states: '(Must be 6-8 characters, must contain at least 2 letters, case-sensitive, no spaces.)'. At the bottom of the form area, there are 'Back' and 'Next' buttons. The footer contains a navigation menu with links for 'Troubleshooting', 'Support', 'D-ViewCam', 'Manual', 'Quick Guide', 'Acrobat Reader', 'About', and 'Exit', along with the copyright notice 'Copyright © D-Link Corporation Inc. All rights reserved.'

ขั้นตอนที่ 10: ถ้าคุณต้องการตั้งค่าเกี่ยวกับเครือข่ายไร้สายกับกล้องของคุณ ตรวจสอบให้แน่ใจว่าเราเตอร์ของคุณสนับสนุนฟังก์ชันเครือข่ายไร้สาย ถ้ารองรับให้คุณเลือกปุ่ม “I want to connect my camera wirelessly”. ในช่องของ Available Wireless Network ให้เลือกชื่อให้ตรงกับระบบเครือข่ายไร้สายของคุณ แล้วให้คลิกบนปุ่ม **Next**


ถ้าคุณต้องการเชื่อมต่อกล้องของคุณผ่านสายเคเบิล กรุณาเลือก Wired – I want to connect my camera through a cable (wired connection) แล้วให้คลิกบนปุ่ม **Next**

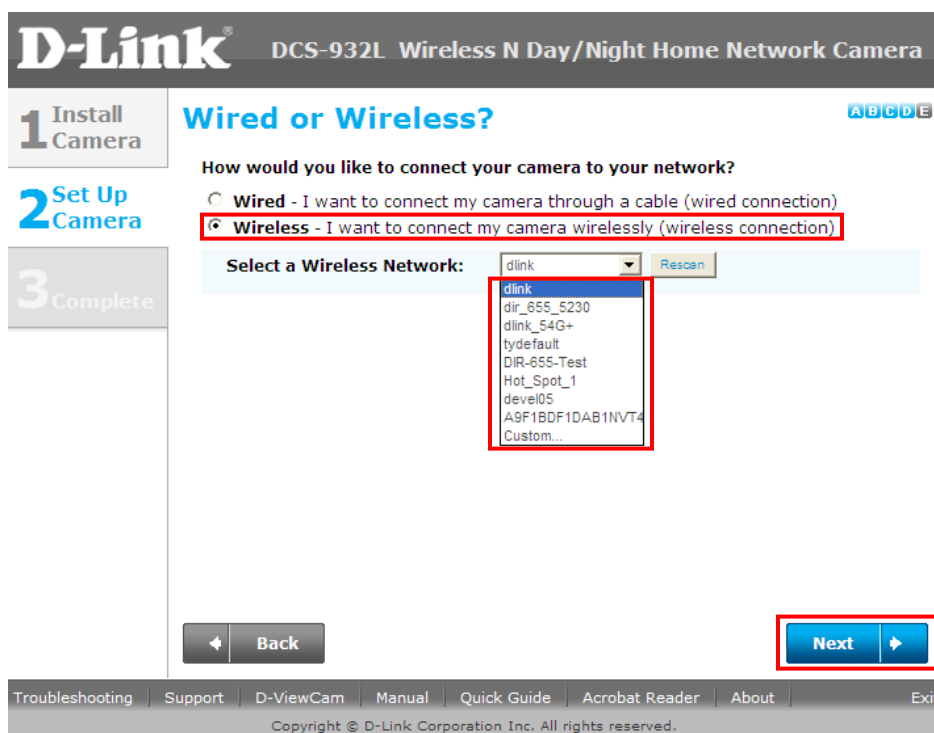

ขั้นตอนที่ 11: ในส่วนของการตั้งค่าเครือข่ายไร้สาย ใส่ค่ารหัสผ่านที่ได้มีการเข้ารหัส (encryption)เอาไว้ที่ใช้ในเครือข่ายไร้สายของคุณ หลังจากนั้นให้คลิกบนปุ่ม **Next**



ขั้นตอนที่ 12: กรุณาดึงสายแลนแบบอีเธอร์เน็ตออกจากด้านหลังของกล้องของคุณ หลังจากนั้นคลิกบนปุ่ม **Continue** กรุณารอขณะที่กล้องกำลังรีสตาร์ท

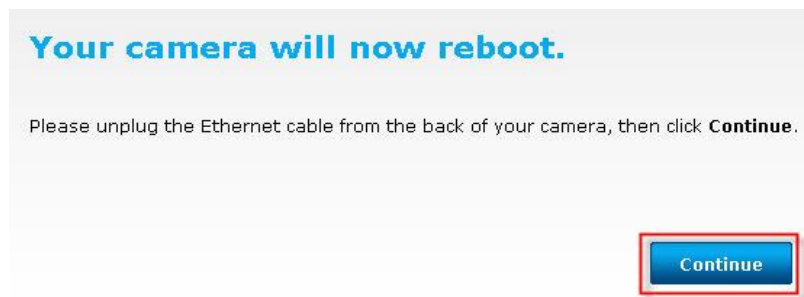

ขั้นตอนที่ 13: เลือกปุ่ม “Yes, I already have a mydlink account” ถ้าคุณได้ลงทะเบียนก่อนที่จะเลือกตัวเลือกนี้ หรือให้เลือก ”No, I need to sign up for a new account “ ในกรณีคุณไม่เคยลงทะเบียนกับ mydlink มาก่อน คลิกบนปุ่ม Next

D-Link DCS-932L Wireless N Day/Night Home Network Camera

1 Install Camera

2 Set Up Camera

3 Complete

Let's add your camera to your mydlink account ABCDE

Adding your camera to your mydlink.com account will allow you to access your camera through the Internet.

Do you have a mydlink account?

Yes, I already have a mydlink account.

No, I need to sign up for a new account.

Please enter your mydlink signin e-mail address and password:


E-mail:

Password:

Troubleshooting | Support | D-ViewCam | Manual | Quick Guide | Acrobat Reader | About | Exit

Copyright © D-Link Corporation Inc. All rights reserved.


ขั้นตอนที่ 14: ตอนนี้การตั้งค่าเรียบร้อยแล้ว คลิกบนปุ่ม **Finish**

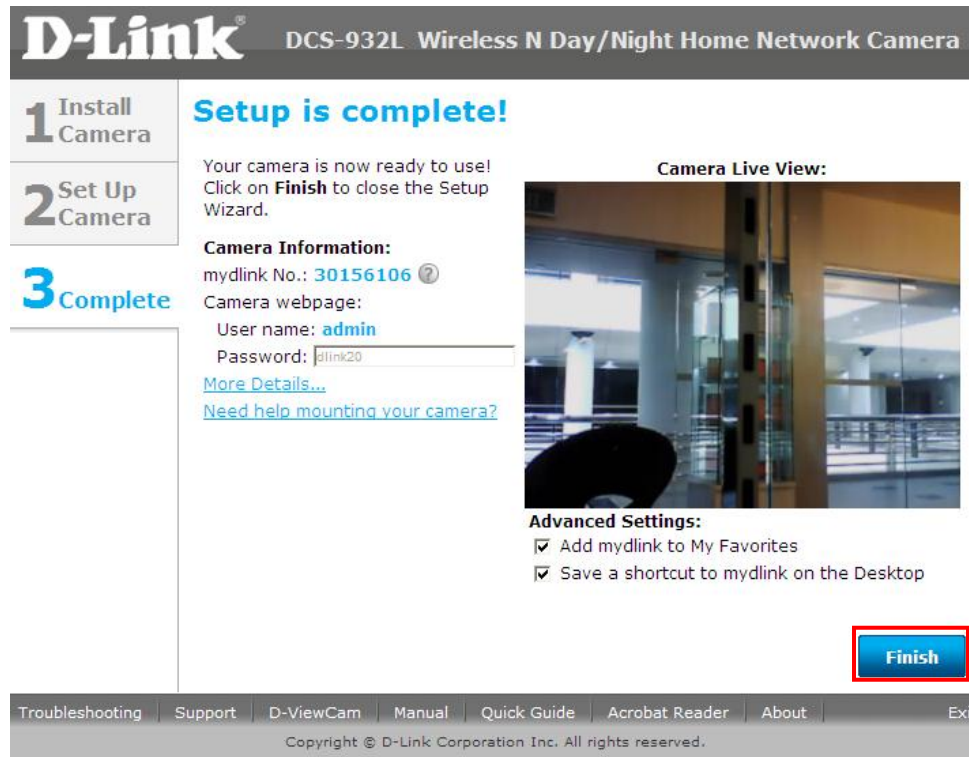


ขั้นตอนที่ 15: ตอนนี้คุณพร้อมแล้วสำหรับการเข้าถึงกล้องของคุณ โดยผ่านบัญชีผู้ใช้งานของ mydlink ให้คุณทำการเปิดเว็บเบราว์เซอร์ของคุณและให้ทำการพิมพ์ <http://www.mydlink.com> บนช่อง address bar ของเว็บเบราว์เซอร์ของคุณ และให้กดปุ่ม Enter ที่อยู่ในคีย์บอร์ดของคุณ




ขั้นตอนที่ 16: ^{คลิก}คลิกบน Sign In to mydlink

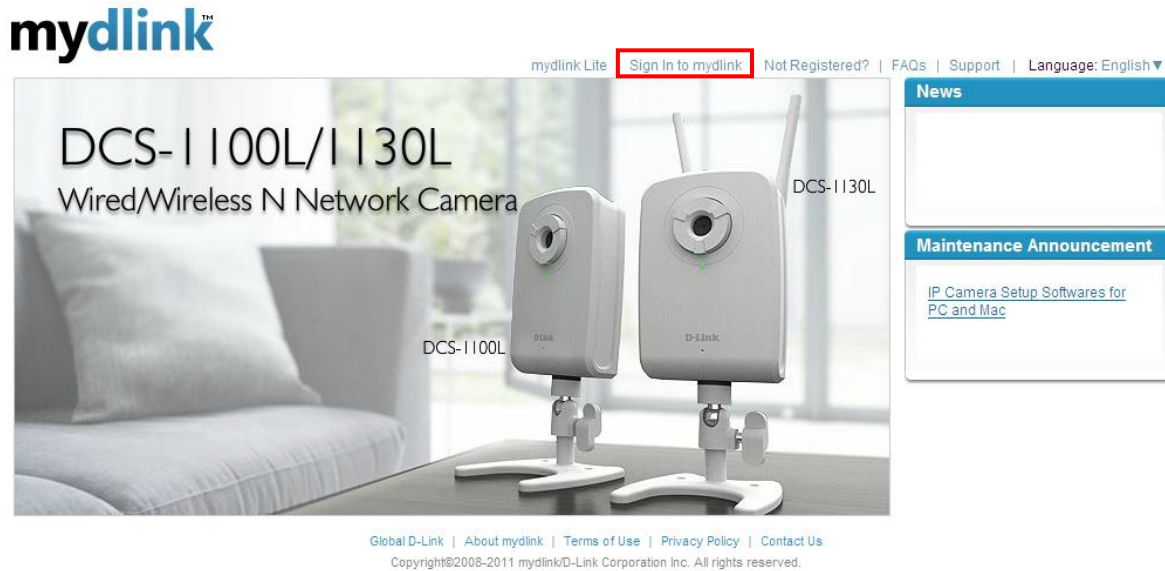

ขั้นตอนที่ 17: ใส่อีเมลแอดเดรสและรหัสผ่านที่ถูกใช้ในการลงทะเบียนกับ mydlink หลังจากนั้นให้ ^{คลิก}คลิกบนปุ่ม Sign In

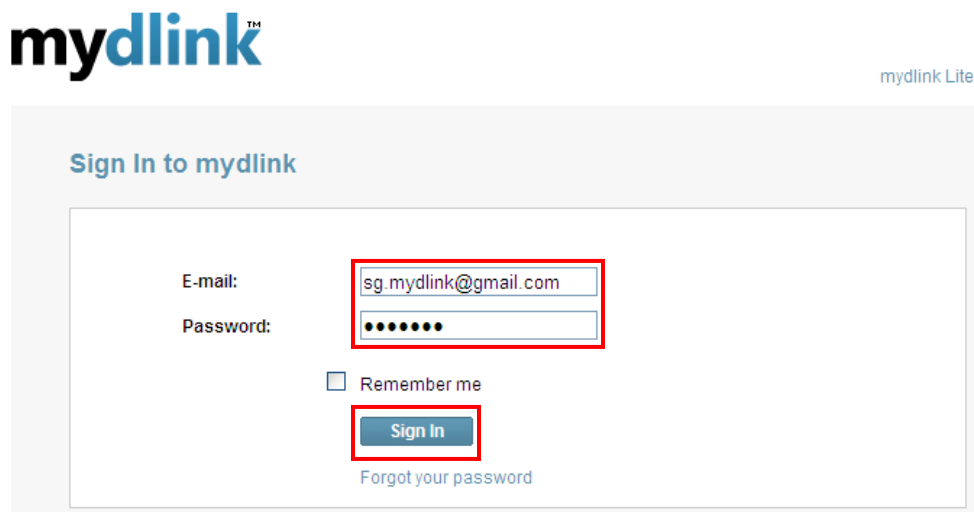

ขั้นตอนที่ 18: ตอนนี้ภาพของกล้องจะแสดงบนบัญชีผู้ใช้งานของ mydlink ของคุณ

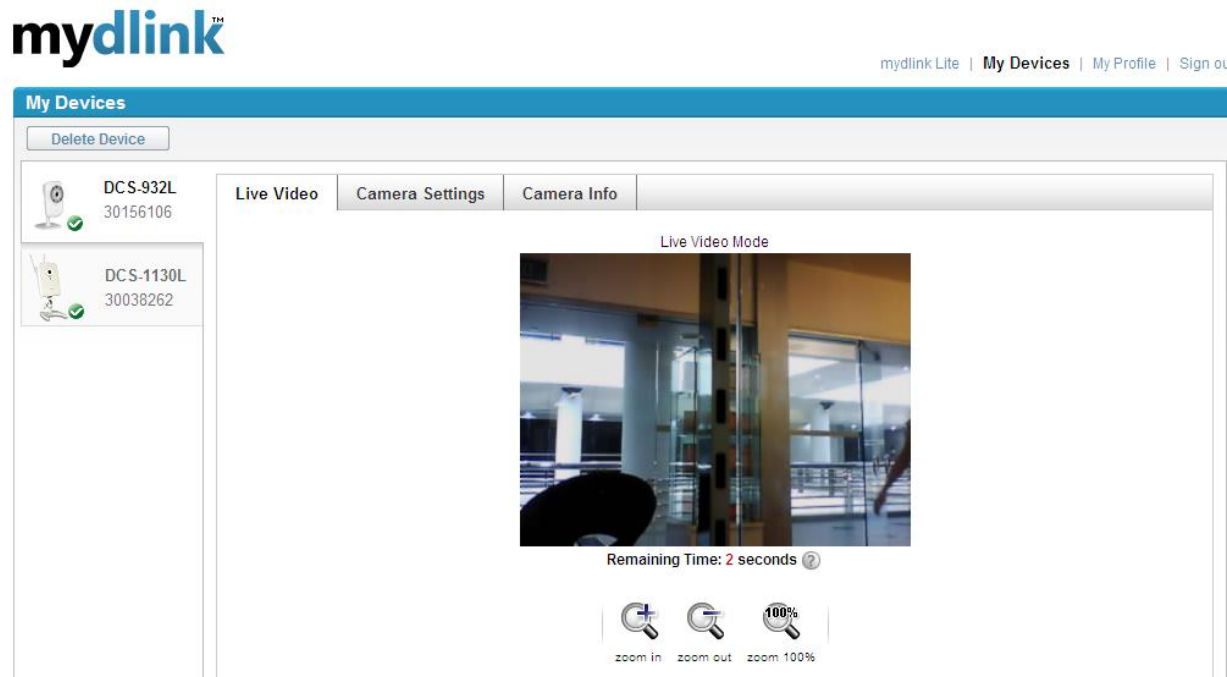


Note : คุณอาจจะทำวิธีการเดียวกันอีกครั้งหนึ่ง เพื่อเพิ่มกล้อง mydlink อื่น ๆ ไปยังบัญชีผู้ใช้งาน mydlink ของคุณ


D-Link® Technical Support Setup Procedure

Setup Wizard - Setting Up DCS-930L & DCS-932L WITH mydlink Account

Step 1: Run the CD Set-Up that came with the DCS-930L/DCS-932L. Click **Autorun** to run mydlink Set-Up Wizard. On the mydlink Set-Up Wizard screen, click **Start** button.

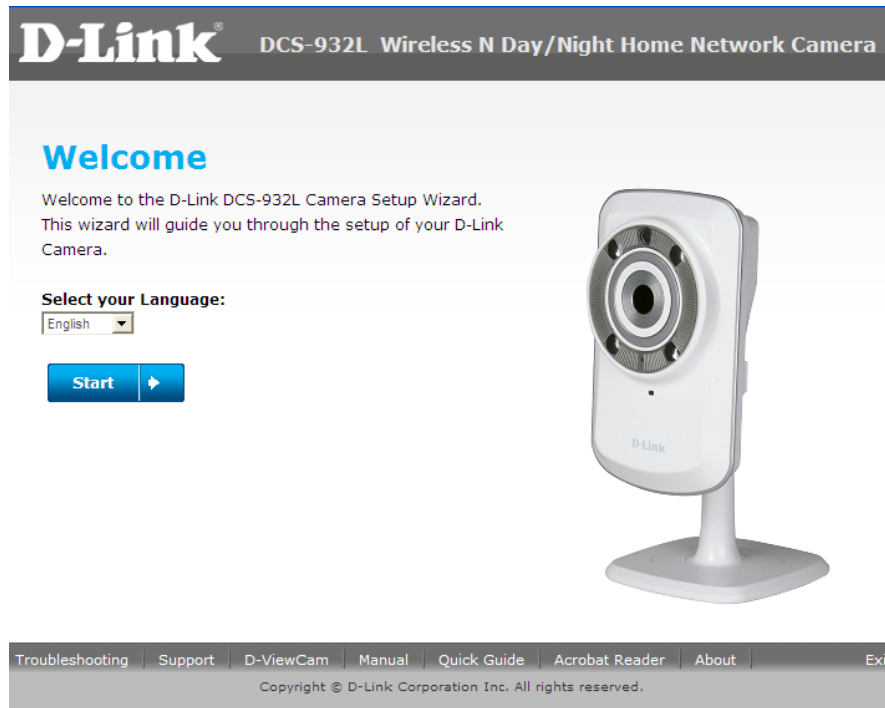

Step 2: Select the radio button "No, my router does not have WPS Support". Click **Next** button.

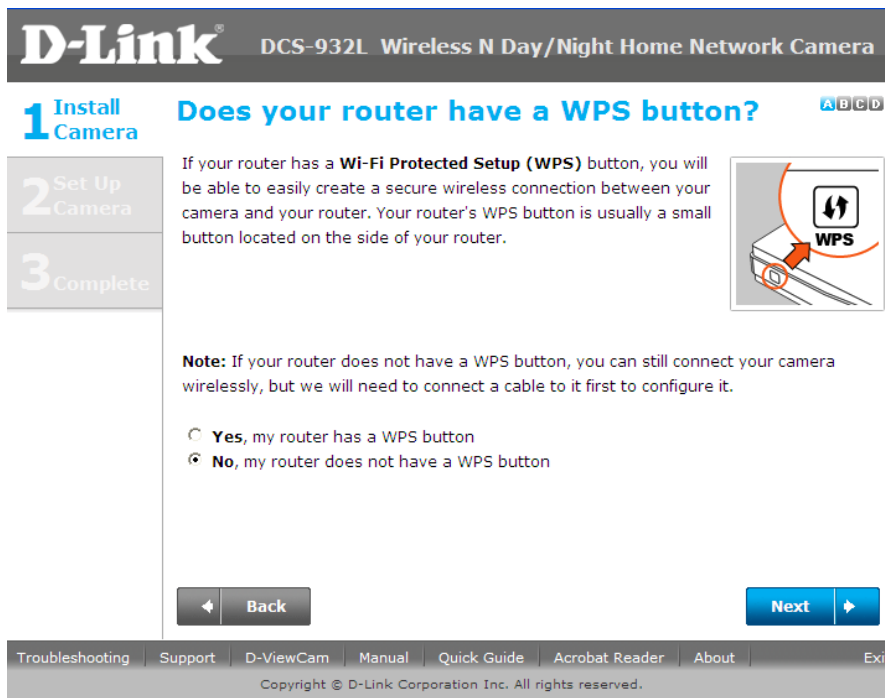



Step 3: Tighten the collar on the camera base after moving the camera to the position you want. Click **Next** button.

D-Link DCS-932L Wireless N Day/Night Home Network Camera

1 Install Camera **Let's set up your hardware** ABC D

2 Set Up Camera

3 Complete



Turn the collar on the camera base counter-clockwise to loosen it.

After moving the camera to the position you want, tighten the collar by turning it clockwise.

Back Next

Troubleshooting | Support | D-ViewCam | Manual | Quick Guide | Acrobat Reader | About | Exit

Copyright © D-Link Corporation Inc. All rights reserved.



Step 4: Connect the included Ethernet cable to the port on the DCS-930L/DCS-932L camera. Connect the other end of the cable to an available LAN port on your router. Click **Next** button.

D-Link DCS-932L Wireless N Day/Night Home Network Camera

1 Install Camera **Connect the Ethernet cable** ABC D

2 Set Up Camera

3 Complete



(1) Connect the included Ethernet cable to the ETHERNET port on the DCS-932L camera.

(2) Connect the other end of the cable to an available LAN port on your router.

[Click here to see a basic overview of how your devices connect together.](#)

Back Next


Troubleshooting | Support | D-ViewCam | Manual | Quick Guide | Acrobat Reader | About | Exit

Copyright © D-Link Corporation Inc. All rights reserved.


Step 5: Attach the power adapter to the power jack on the back of the DCS-930L/DCS-932L camera, and connect the power adapter to a power outlet. Ensure that the **Status** LED on the front of the camera is solid green after 30 seconds. Click **Next** button.

Step 6: A pop up message will appear. Please check if the LED on the front of the camera lit is solid green. Click **Yes** button if it is solid green.

Step 7: Please wait while the Wizard is detecting the camera on your network.

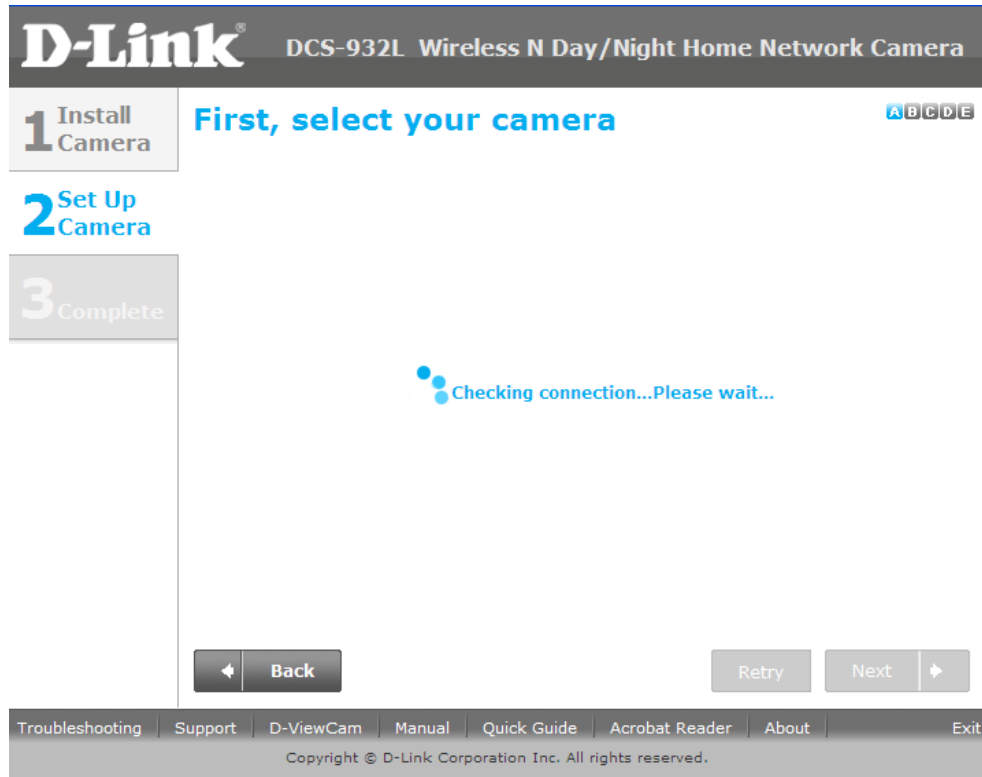

Step 8: You will now see the camera device information with its corresponding IP Settings and MAC Address. Click **Next** button.

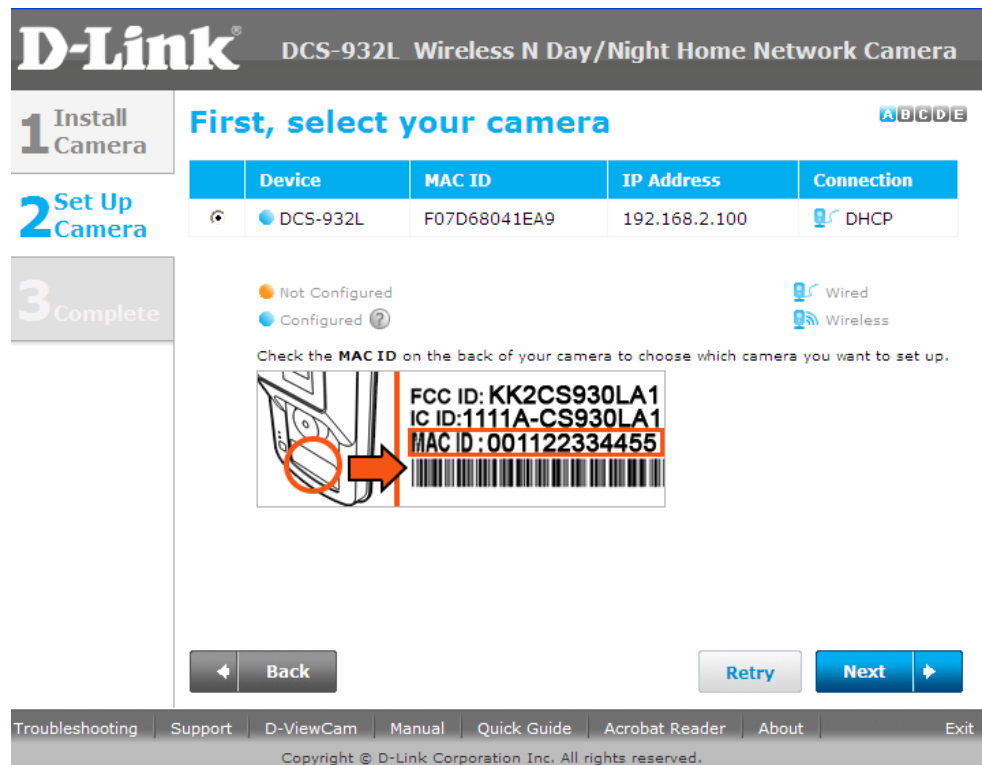

Step 9: Please enter a password to secure you camera. Click **Next** button when done.

The screenshot shows the 'Set your camera's password' step of the D-Link setup wizard. On the left, a progress bar indicates three steps: '1 Install Camera', '2 Set Up Camera', and '3 Complete'. The main heading is 'Set your camera's password' with a search icon 'ABCDE'. Below the heading, it says 'Please enter a password to secure your camera.' There are three input fields: 'Admin ID:' with 'admin' entered, 'New Password:' with masked characters, and 'Confirm new password:' with masked characters. A note below the password fields states: '(Must be 6-8 characters, must contain at least 2 letters, case-sensitive, no spaces.)'. At the bottom, there are 'Back' and 'Next' buttons. A footer contains links for Troubleshooting, Support, D-ViewCam, Manual, Quick Guide, Acrobat Reader, About, and Exit, along with the copyright notice: 'Copyright © D-Link Corporation Inc. All rights reserved.'

Step 10: If you want to setup your camera wirelessly make sure that your router supports wireless. If so, select the radio button **"I want to connect my camera wirelessly"**. On the Available Wireless Network, select the name of your wireless network and click **Next** button.

If you want to connect your camera via a network cable, please select **"Wired – I want to connect my camera through a cable (wired connection)"**. Click **Next** button.

The screenshot shows the 'Wired or Wireless?' step of the D-Link setup wizard. The title bar reads 'D-Link DCS-932L Wireless N Day/Night Home Network Camera'. The progress bar on the left shows '1 Install Camera', '2 Set Up Camera', and '3 Complete'. The main heading is 'Wired or Wireless?' with a search icon 'ABCDE'. Below the heading, it asks 'How would you like to connect your camera to your network?'. There are two radio button options: 'Wired - I want to connect my camera through a cable (wired connection)' and 'Wireless - I want to connect my camera wirelessly (wireless connection)'. The 'Wireless' option is selected and highlighted with a red box. Below this, there is a 'Select a Wireless Network:' dropdown menu with 'dlink' selected, and a 'Rescan' button. A list of available networks is shown in a dropdown menu, including 'dlink', 'dir_655_5230', 'dlink_54G+', 'tydefault', 'DIR-655-Test', 'Hot_Spot_1', 'devel05', 'A9F1BDF1DAB1NVT4', and 'Custom...'. At the bottom, there are 'Back' and 'Next' buttons. A footer contains links for Troubleshooting, Support, D-ViewCam, Manual, Quick Guide, Acrobat Reader, About, and Exit, along with the copyright notice: 'Copyright © D-Link Corporation Inc. All rights reserved.'

Step 11: For wireless setup, enter the wireless encryption used on your wireless network and click **Next** button.

D-Link DCS-932L Wireless N Day/Night Home Network Camera

1 Install Camera

2 Set Up Camera

3 Complete

Wired or Wireless?

How would you like to connect your camera to your network?

Wired - I want to connect my camera through a cable (wired connection)

Wireless - I want to connect my camera wirelessly (wireless connection)

Select a Wireless Network: DIR-655-Test [Rescan](#)

Key / Password:

(If no password is required, leave this blank.)

Retype your Key / Password

[Back](#) [Next](#)

Troubleshooting | Support | D-ViewCam | Manual | Quick Guide | Acrobat Reader | About | Exit

Copyright © D-Link Corporation Inc. All rights reserved.


Step 12: Please unplug the Ethernet cable from the back of your camera, then click **Continue** button. Please wait while the camera is restarting.

Your camera will now reboot.


Please unplug the Ethernet cable from the back of your camera, then click **Continue**.

[Continue](#)

Step 13: Select the radio button **"Yes, I already have a mydlink account"** if you already registered before or select the radio button on **No, I need to sign up for a new account if you did not register in mydlink yet.** Click **Next** button.

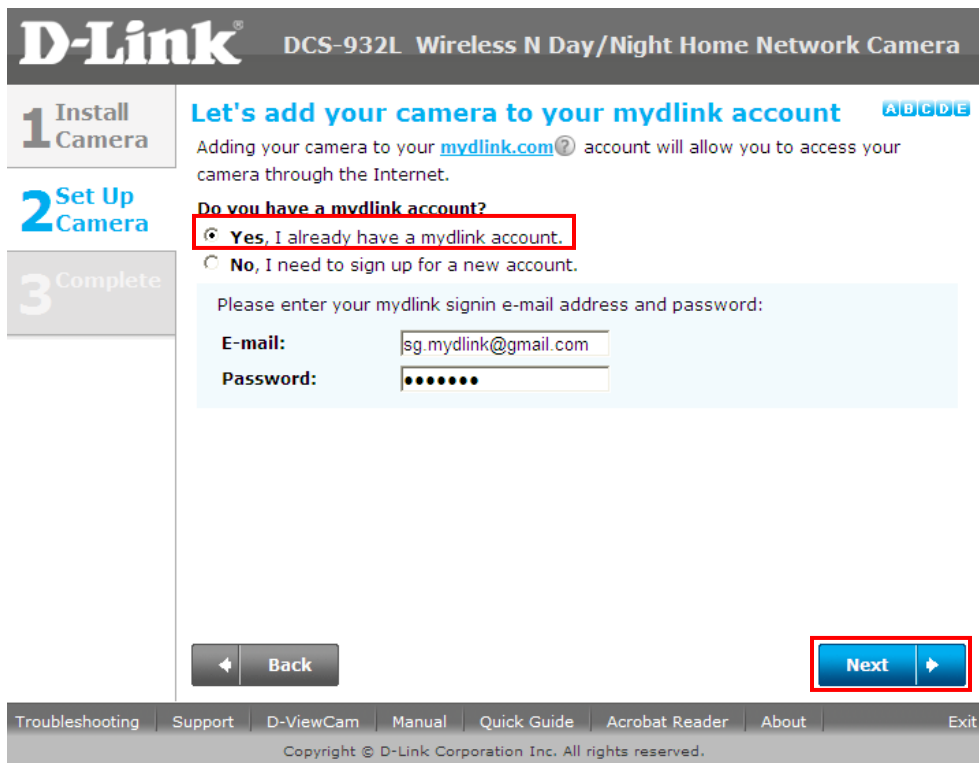


Step 14: Set-up is Complete. Click **Finish** button.

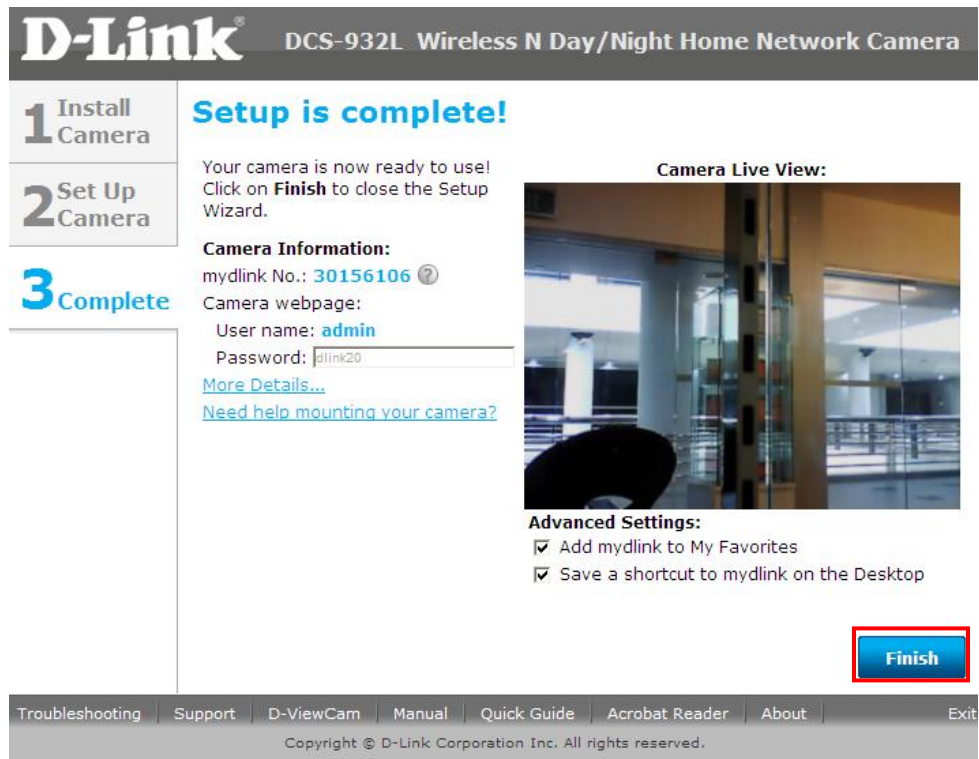


Step 15: You are now ready to access the camera using the mydlink account. Open your web browser and type <http://www.mydlink.com> on the address bar. Press the enter key on your keyboard.



Step 16: Click on *Sign In to mydlink*.

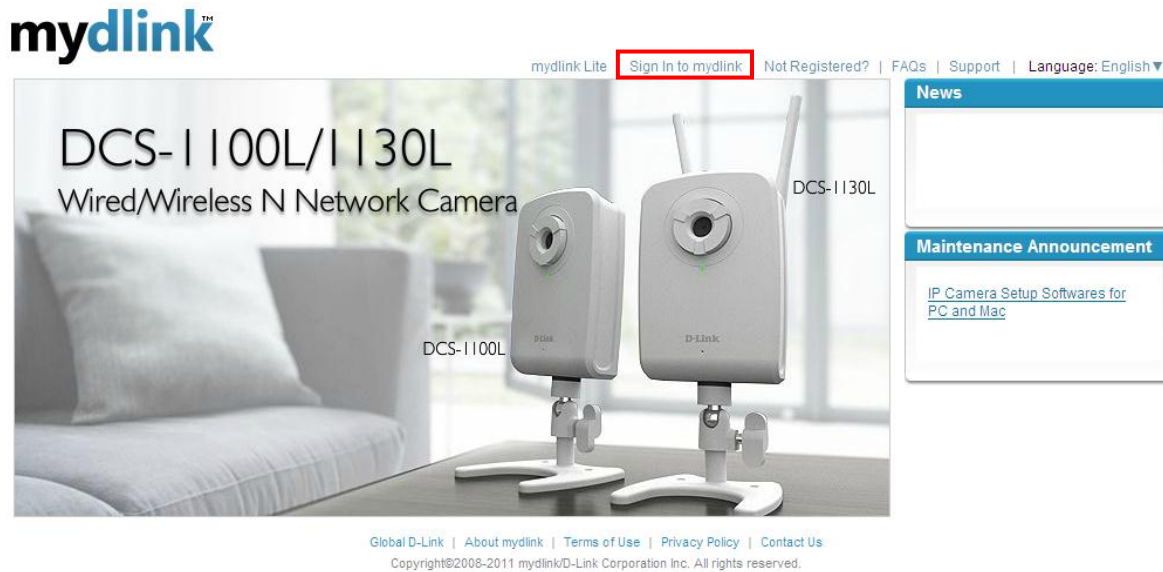


Step 17: Enter the E-Mail Address and the Password used to register on mydlink and then click on the **Sign In** button.

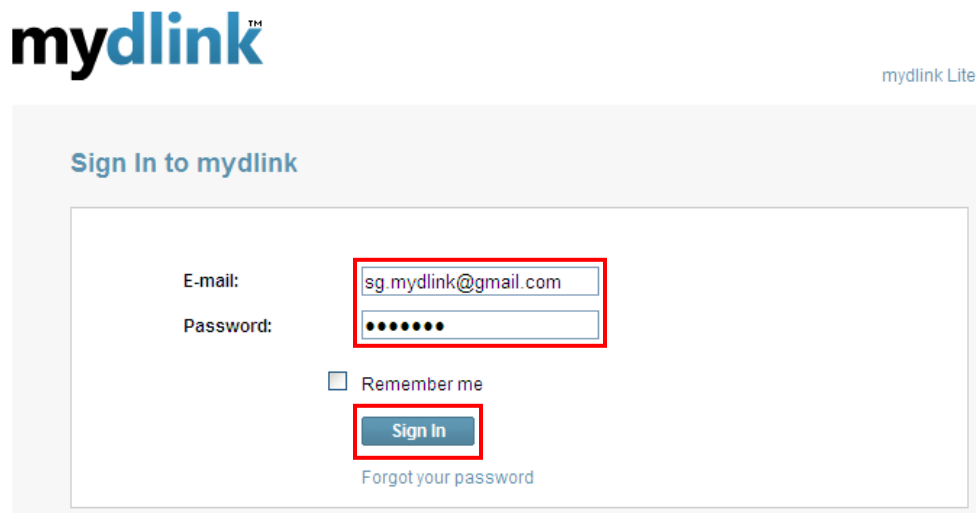

Step 18: The image of the camera will now show up on your mydlink account.



mydlink Lite | **My Devices** | My Profile | Sign out

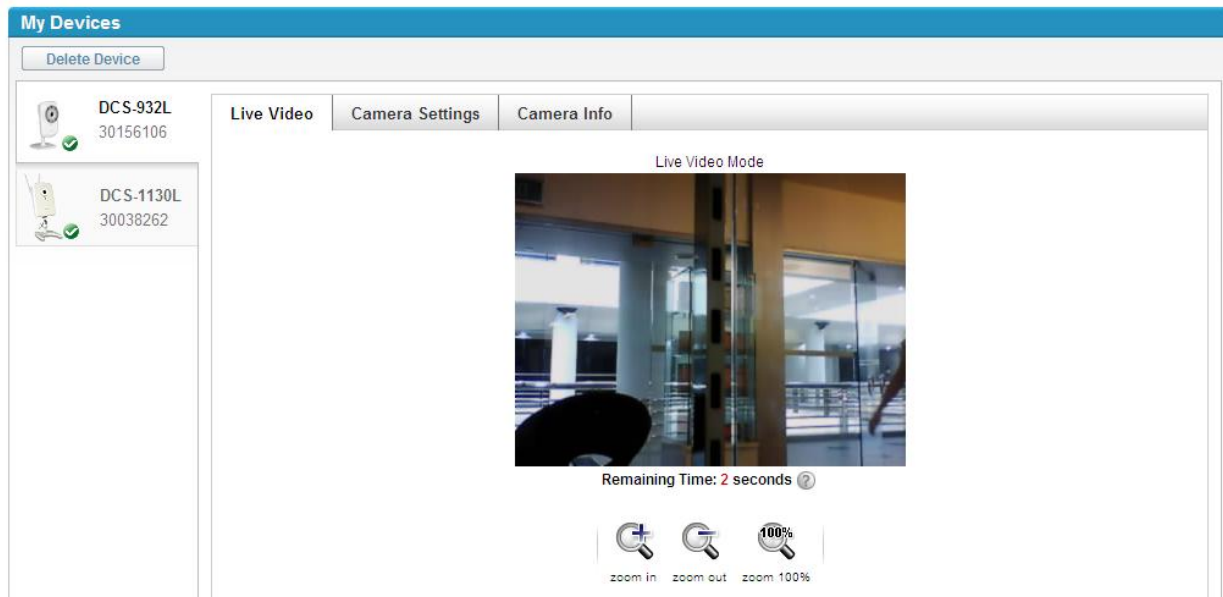

Note: You may repeat the same procedure to add more mydlink ip cameras to your mydlink account.

ฝ่ายสนับสนุนทางด้านเทคนิค

Call Center หมายเลขโทรศัพท์ 02-6617997

ภาษาไทย : จันทร์ ถึง ศุกร์ เวลา 9.00 น. – 18.00 น.

Thai : Mon – Fri : Time 9.00 – 18.00.

ภาษาอังกฤษ : เสาร์ , อาทิตย์ , วันหยุดนชัตฤกษ์ และ วันธรรมดา หลัง 18.00 น.

English : Sat – Sun , Public Holiday and after 18.00 weekday.

Website : www.dlink.co.th

email: support@dlink.com.sg

Facebook : <http://www.facebook.com/DLinkThailandFans>

Nationwide D-Link Service Centres

Chiang Mai Branch

2/1 Moo 3, Chiang Mai-Lampang Road
Tumbon Chang Pueak, Amphoe Mueang Chiang Mai
Changwat Chiang Mai 50300,
Thailand

Tel : +66 (0) 5340-9482-6

Fax : +66 (0) 5340-9486

Operating hours:

Mondays till Friday

9am to 6pm

Phitsanulok Branch

117/7 Praongdam Road
Tumbon Nai Mueang,
Amphoe Mueang Phitsanulok
Changwat Phitsanulok 65000, Thailand

Tel : +66 (0) 5521-2323-5

Fax : +66 (0) 5521-2326

Operating hours:

Mondays till Friday

9am to 6pm

Cham Issara Tower II

3rd Floor, Cham Issara Tower II
2922/138 New Perchburi Road
Khwang Bangkapi, Khet Huay-Kwang,
Bangkok 10320, Thailand

Tel : +66 (0) 2308-2040

Fax : +66 (0) 2308-2024

Call Center : +66 (0) 2716-6669

Operating hours:

Mondays till Friday

9am to 6pm

Pantip Plaza Branch

4th Fl. Pantip Plaza 604/3 Petchburi Road Room
439-440

Kwang Thanon Petchburi, Khet Ratchathewi

Bangkok 10400, Thailand

Tel : +66 (0) 2656 6037

Tel : +66 (0) 2656 6054

Fax : +66 (0) 2656 6042

Operating hours:

Mondays till Sunday

10am to 7pm

Rayong Branch

217/24 Sukhumvit Road
Tumbon Noen Phra,
Amphoe Mueang Rayong
Changwat Rayong 21000, Thailand

Tel : +66 (0) 3880-0631-3

Fax : +66 (0) 3880-0634

Operating hours:

Mondays till Sunday

9am to 6pm

Surat Thani Branch

412/8 Talat Mai Road
Tumbon Talat,
Amphoe Mueang Surat Thani
Changwat Surat Thani 84000, Thailand

Tel : +66 (0) 7721-7907-10

Fax : +66 (0) 7721-7910

Operating hours:

Mondays till Friday

9am to 6pm

Phuket Branch

156/3 Phang Nga Road
Tumbon Taratyai,
Amphoe Mueang Phuket
Changwat Phuket 83000, Thailand

Tel : +66 (0) 7623-2906-9

Fax : +66 (0) 7623-2909

Operating hours:

Mondays till Friday

9am to 6pm

Hat Yai Branch

48/106 Phadungpakdee Road
Tumbon Hatyai, Amphoe Hatyai
Changwat Songkhla 90110, Thailand

Tel : +66 (0) 7435-4559-61

Fax : +66 (0) 7435-4561

Operating hours:

Mondays till Friday

9am to 6pm