


How to configure DSL-2640T to block LAN access to internet.

Please note use only hard-wired network connections, to do the setting.

**** Disable firewall in your PC to avoid login problem****

Step 1 Connect your PC to the LAN port of your DSL-2640T

Step 2 Start up a Internet explorer and key in 192.168.1.1 (by default)

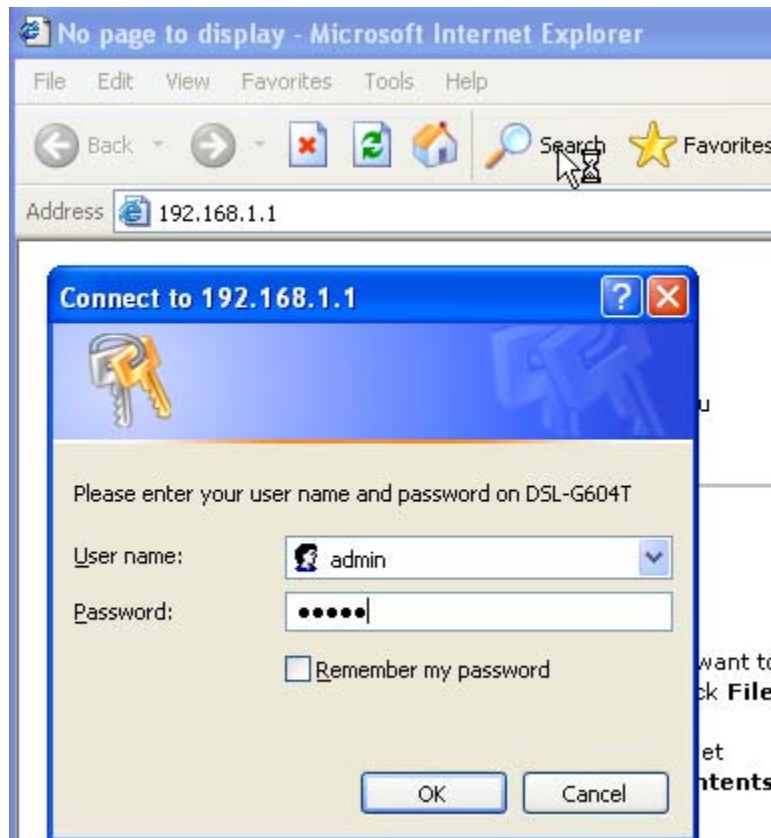

Step 3 Key in your username and password (by default username is admin password is admin as well)

Step 4 Once you login to the Dlink configuration page click on **Advanced > Filters.**

Example:
IP address that fall between 192.168.1.3 to 254 will be block from accessing internet using HTTP

ID	Source IP	Destination IP	Prot.	Act.	Enable
1	192.168.1.3:Any Port	Any IP:80	TCP	Deny	<input checked="" type="checkbox"/>
2	Any IP:Any Port	Any IP:Any Port	TCP	Allow	<input type="checkbox"/>

Step 5 Select **Outbound Filter**, fill in the relevant information.

For Example:

Administrator wants to **Block** LAN IP from 192.168.1.3 to 192.168.1.254 access to HTTP (web browsing), except 192.168.1.2.

Step 6 After the entry click on **Apply** and the filter rule will be created in 4. please **Enable** the rule.

Step 7 Click on **Tools > System > "Save and reboot"** to complete the setup.

