


How to configure DSL-2604T to connect to Singnet / Pacific net.

Please note use only hard-wired network connections, to do the setting.

** Disable firewall in your PC to avoid login problem**

Step 1 Connect your PC to the LAN port of your DSL-2604T

Step 2 Start up an Internet explorer and key in **192.168.1.1** (by default)

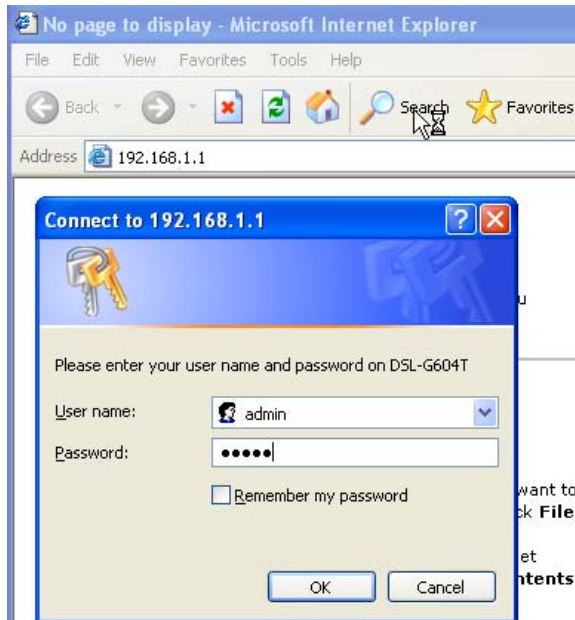


By default

Username: admin


Password: admin

Step 3 Clicks on the **Home** tab.

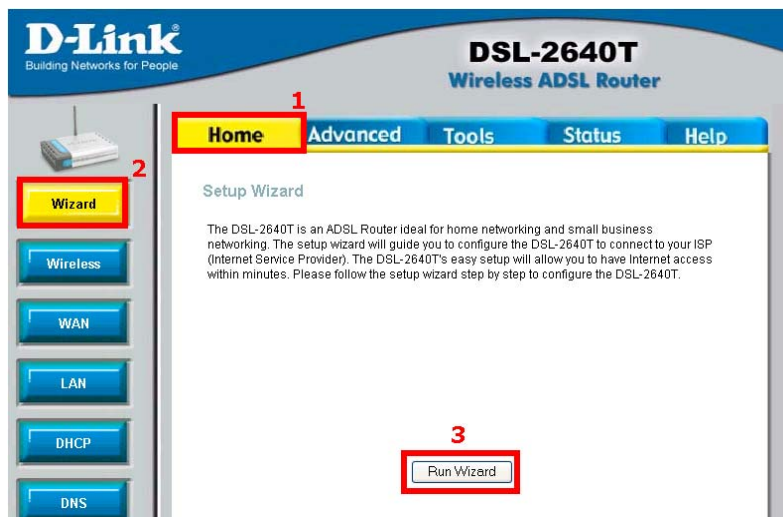


Step 4 Click on the **Wizard** button.

Step 5 Click on the **Run Wizard** button.

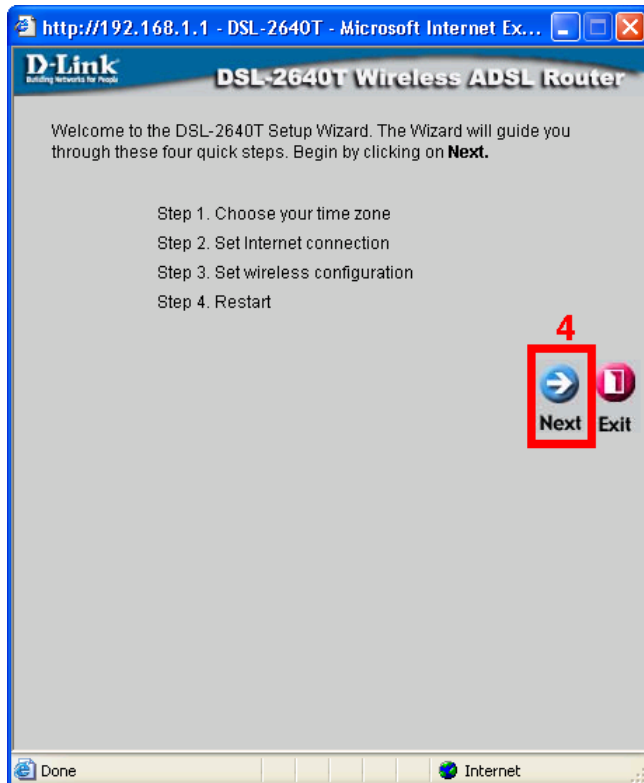


Step 6 Click on the **Next** icon.

Step 7 Select the correct Time zone.

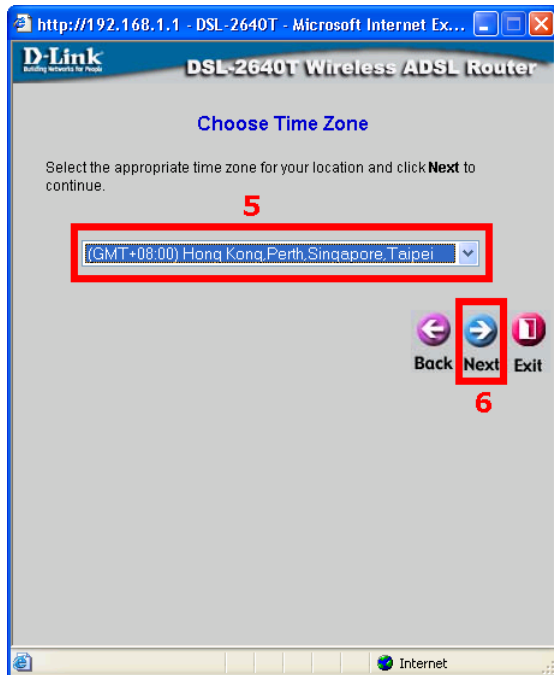

Step 8 Click on the **Next** icon.

Step 9 Select the **PPPoE/PPPoA** option.

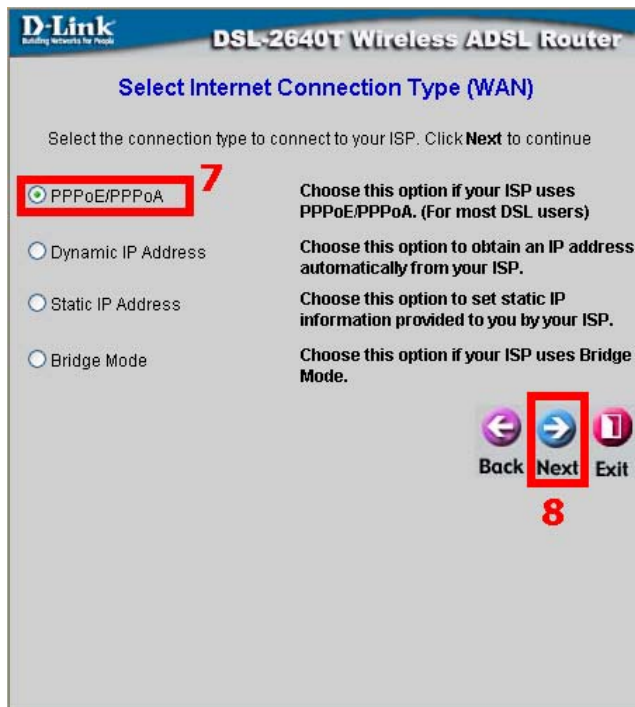

Step 10 Click on the **Next** icon.

Step 11 Key in your **Broadband account User Name and Password.**

Step 12 Key in your **VPI** and **VCI** values. **VPI = 0, VCI= 100.** (For Malaysia user: **Streamyx VPI= 0, VCI=35**)

Please check with your local ISP the exact value. This value varies depending on country to country basis.

Step 13 Select the correct Connection type. **PPPoE LLC**

*For Singnet user your Singnet username should end with xxxxx@singnet or xxxxx@singnet1500 or xxxxx@singnetbusiness
For Pacific net user your username should end with xxxxxxx@pacific.net.sg or xxxxx@pacnet1500*

Username might be varying please check with your ISP for the correct username.

The screenshot shows the configuration page for a D-Link DSL-2640T Wireless ADSL Router. The page is titled "Set PPPoE / PPPoA" and contains the following fields and buttons:


User Name	username@ISP	9
Password	••••	10
VPI	0	11
VCI	100	11
Connection Type	PPPoE LLC	12

At the bottom right, there are three buttons: "Back", "Next", and "Exit". The "Next" button is highlighted with a red box and labeled "13".


Step 14 Click on the **Next** icon.

Step 15 Key in your **Wireless LAN Connection**.

Step 16 Key in your **SSID, Channel and Security**.

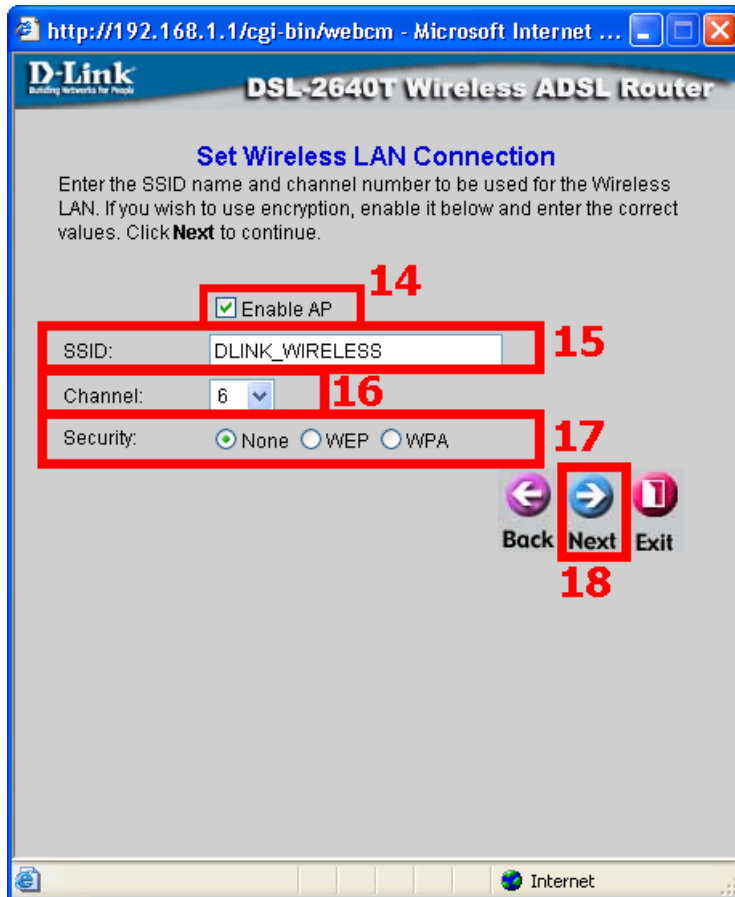


Step 17 Click on the **Next** icon.

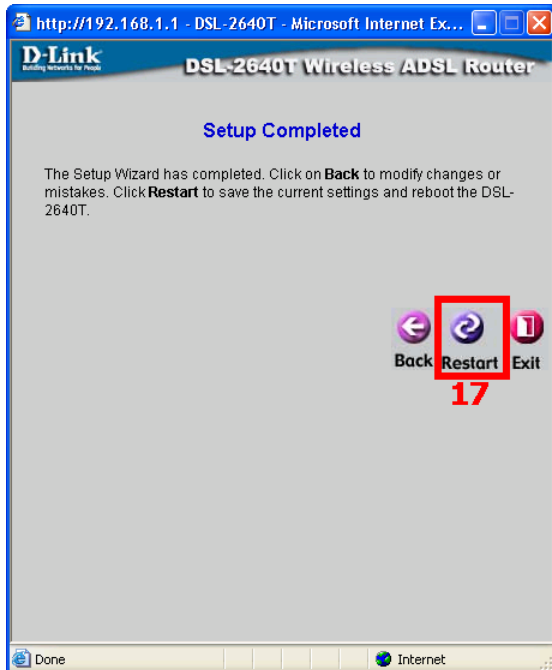

Step 18 Click on the **Restart** icon.

Step 19 You will see that the DSL-2604T is restarting. Please allow one minute of waiting time for the restart process.

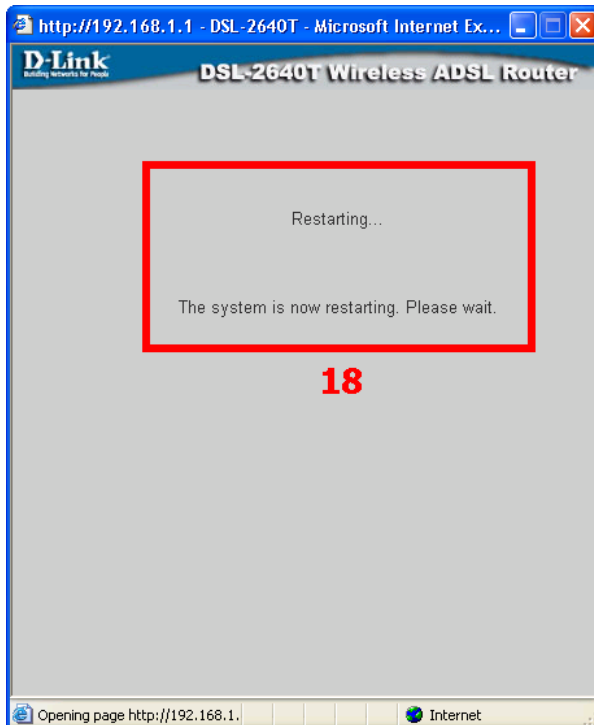

Step 20 Lastly, click on the close button to return to the Web Browser configuration.