

D-Link[®] Technical Support Setup Procedure

FAQ : How to Change the SSID and Enable WEP Encryption on the DCS-930L

Release date : 6/02/2012


Model Support : DCS-930L

H/W:A1


S/W:1.00

วิธีการเปลี่ยน SSID และเปิดใช้งานการเข้ารหัส WEP บน DCS-930L


ขั้นตอนที่ 1: คลิกปุ่ม Start บนคอมพิวเตอร์ของคุณและจากนั้นเลือก **All Programs**

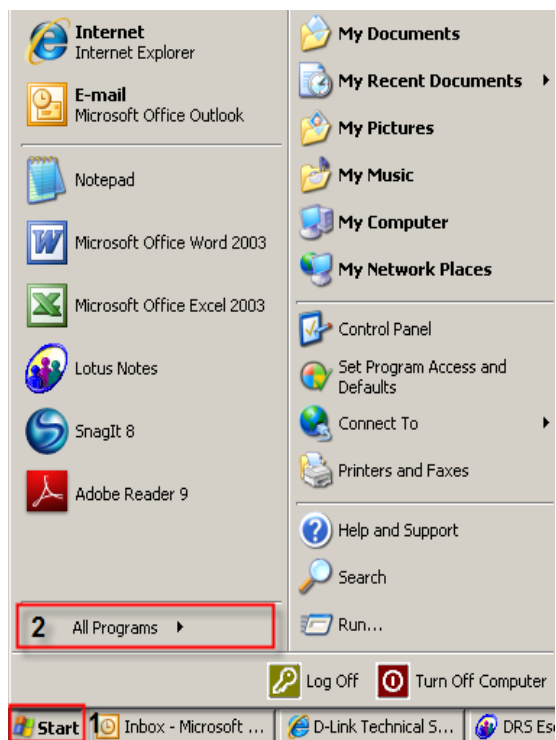

ขั้นตอนที่ 2: ภายใต้โปรแกรมทั้งหมดที่เลือกบน D - Link > Setup Wizard SE และจากนั้นคลิกเกี่ยวกับ D - Link Setup Wizard SE

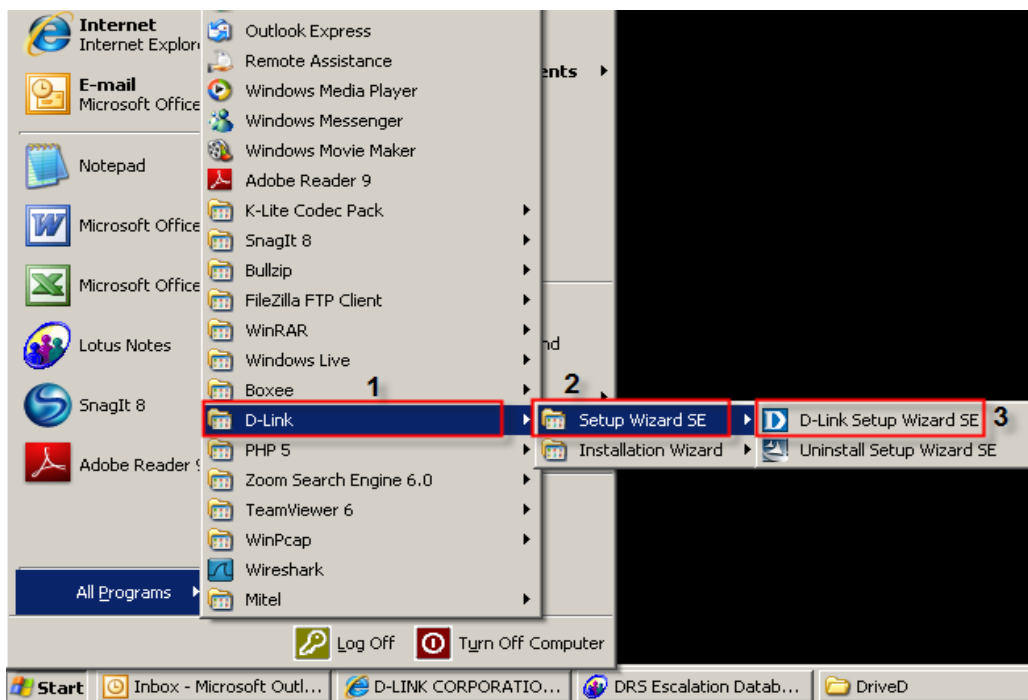

ขั้นตอนที่ 3: เกี่ยวกับตัวช่วยสร้างการติดตั้ง D - Link, กล้องที่คุณต้องการในการเข้าถึงและแล้วคลิกที่ปุ่มการเชื่อมโยง

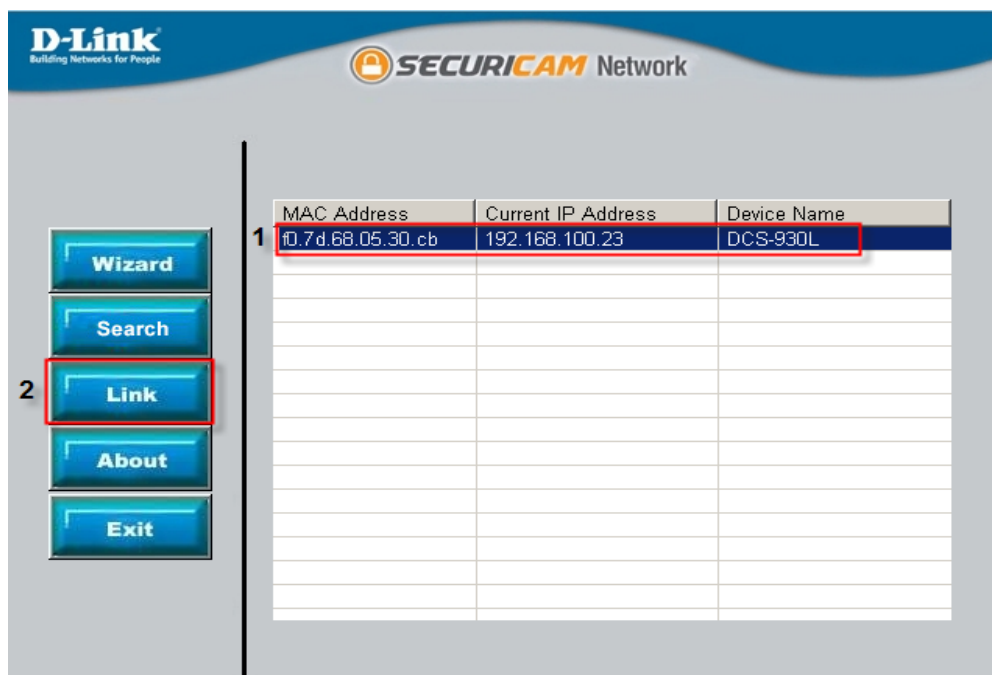


ขั้นตอนที่ 4: จากหน้าต่างลือคอินให้ใส่ค่า username เป็น "admin"

แล้วรหัสผ่านที่ใช้ในการเมื่อคุณเรียกใช้ตัวช่วยสร้าง คลิกปุ่ม OK



ขั้นตอนที่ 5: คลิกที่แท็บ **SETUP** และเลือกไปที่ปุ่ม **Network Setup** ทางด้านซ้ายมือ

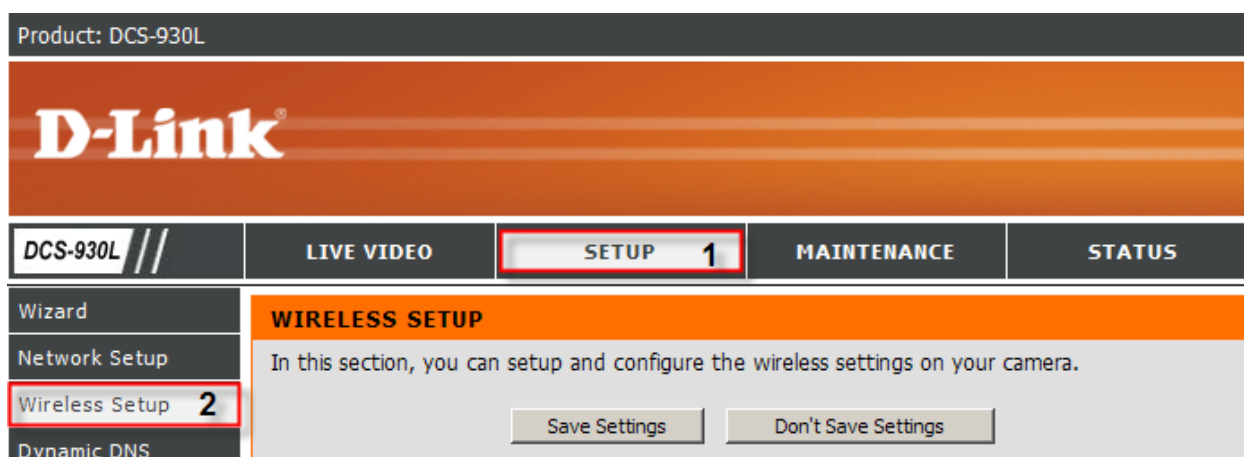

ขั้นตอนที่ 6: ภายใต้วัดเลือก **BASIC WIRELESS SETTINGS** ให้ใส่ค่าติดตั้งไปดังนี้;

- 1 SSID: ใส่ชื่อเครือข่ายไร้สาย (ต้องตรวจสอบเกี่ยวกับ AP หรือ Router ของคุณ)
- 2 โหมดการเชื่อมต่อ: เลือกปุ่มตัวเลือกเกี่ยวกับ โครงสร้างพื้นฐาน
- 3 โหมดความปลอดภัย: เลือกปุ่มตัวเลือกเกี่ยวกับ WEP
- 4 รับรองความถูกต้อง: [Open System](#)
- 5 โหมดการเข้ารหัสลับ: 64bits หรือ 128Bits
- 6 รูปแบบสำคัญ: Hex เลือก
- 7 เริ่มต้นที่สำคัญ: เลือก Key 1
- 8 Key1: ป้อนคีย์การเข้ารหัสที่ใช้บน AP หรือเราเตอร์ไร้สายของคุณ
- 9 คลิกที่ปุ่ม Save Settings


D-Link® Technical Support Setup Procedure

How to Change the SSID and Enable WEP Encryption on the DCS-930L


Step 1: Click on the **Start** button on your computer and then select on **All Programs**.




Step 2: Under the **All Programs** select on **D-Link > Setup Wizard SE** and then click on **D-Link Setup Wizard SE** button.

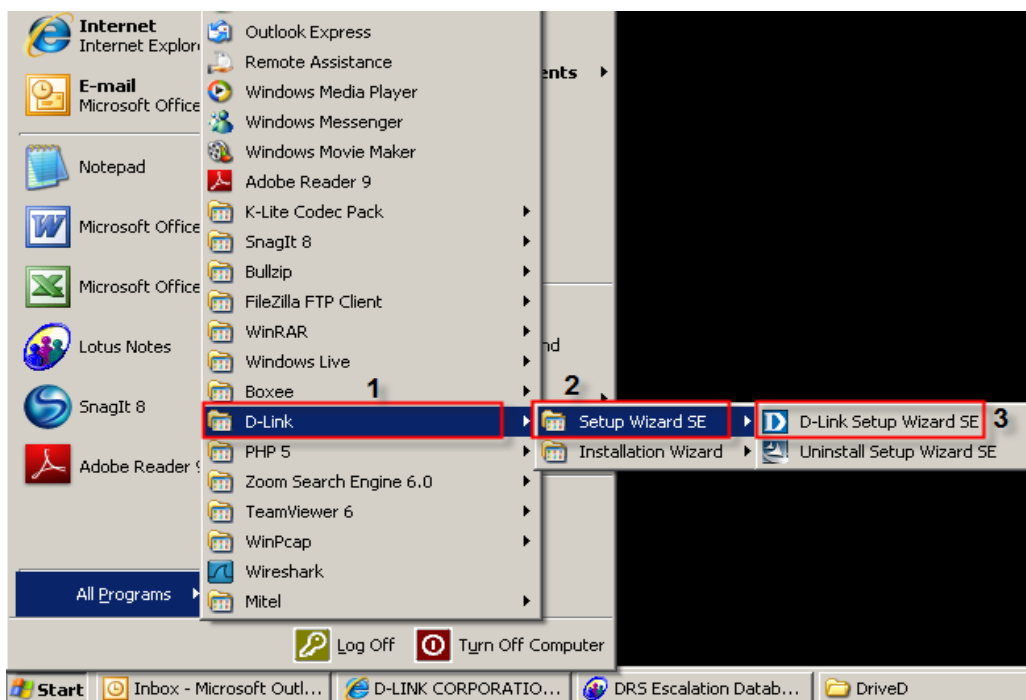

Step 3: On the *D-Link Setup Wizard*, the camera you want to access and then click on the **Link** button.

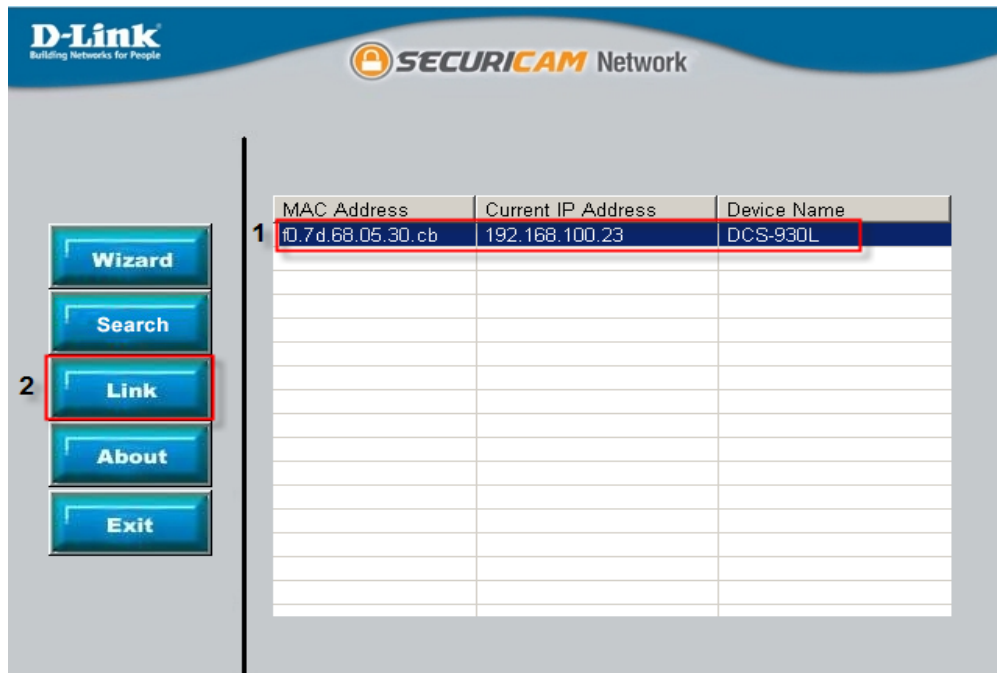

Step 4: A login screen will appear, enter the username as "admin" and then the password used to when you run the wizard. Click on **OK** button.

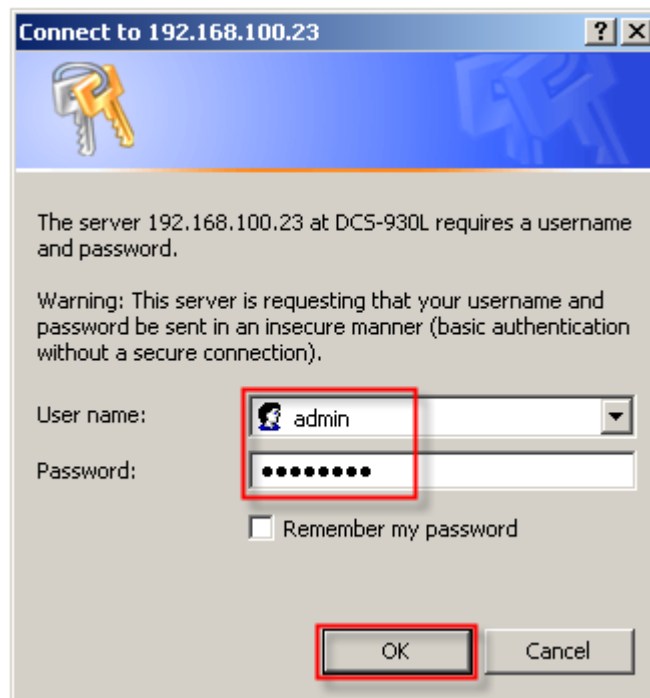

Step 5: Click on the **SETUP** tab and then select on **Wireless Setup** button on the left hand side.

Product: DCS-930L

D-Link

DCS-930L // LIVE VIDEO **SETUP 1** MAINTENANCE STATUS

Wizard
Network Setup
Wireless Setup 2
Dynamic DNS

WIRELESS SETUP

In this section, you can setup and configure the wireless settings on your camera.

Save Settings Don't Save Settings

Step 6: Under the **BASIC WIRELESS SETTINGS** section, configure the following;

1. **SSID:** Enter a name for the wireless network (*Needs to check on your AP or Router*)
2. **Connection Mode:** Select the radio button on Infrastructure
3. **Security Mode:** Select the radio button on WEP
4. **Authentication:** Open System
5. **Encryption Mode:** 64Bits or 128Bits
6. **Key Format:** Select Hex
7. **Default Key:** Select Key 1
8. **Key1:** Enter the encryption key used on your AP or Wireless Router
9. Click on the **Save Settings** button

BASIC WIRELESS SETTINGS

SSID 1

Channel

Connection Mode 2 Infrastructure Ad-Hoc

Site survey

WIRELESS SECURITY MODE

Security Mode None 3 WEP WPA-PSK / WPA2-PSK

WEP SETTINGS

Authentication 4 Open System Shared Key Both

Encryption Mode 5

Key Format 6

Default Key 7

Key1 8

Key2

Key3

Key4

9