



How to configure SharePort Web Access?

Step 1: Insert your USB Flash Drive into your router.

Step 2: Open an Internet browser (such as Internet Explorer) and enter <http://dlinkrouter.local> or <http://192.168.0.1> into the address bar.




Step 3: Enter the password for your Admin account in the field provided. If you have not changed this password from the default, leave the field blank. Click **Log In**.



Admin Password:

To access your storage with SharePort Web Access, [click here](#).

Step 4: From the network map on the main page, click the USB Device icon to display the storage status. The information displayed here should reflect the characteristics of the USB drive plugged into the USB port.

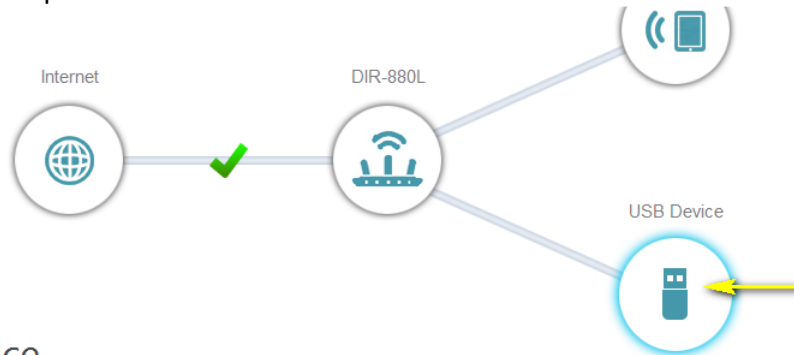

USB Device

USB Port:

Available Space:	177MB
Total Space:	246MB

28%

DLNA Media Server

Status: Disabled
Service Name: DIR-880L_DMS

SharePort

Status: Enabled

Windows File Sharing

Status: Enabled


[Go to settings](#)

Step 5: Open a new web browser and enter [IP address of your router]:[HTTP Access Port]
Example (for local access)- <http://192.168.0.1:8181>

Note: If accessing from the Internet, you need to enter the router's [WAN IP]:[Port]
Example (for remote access) - <http://24.12.134.125:8181> where your router's WAN side IP address is 23.12.134.125, and the access port is 8181.

Step 6: Enter your router's Administrator **Username** and **Password**.

Note: If you have not changed them from the defaults, the username should be *Admin*, and the password field should be left blank.



SharePort Web Access

The image shows a login form titled "SharePort Web Access". It contains two input fields: "Username :" and "Password :". Below these fields is a teal button labeled "Log In". The entire form is enclosed in a light gray rounded rectangle.

To access device management, [click here](#).

Your media will be organized by media type and will be displayed similar to the image below.

