


## How to Enable WPA Personal Encryption on DIR-895L?


**Step 1:** Open an Internet browser (such as Internet Explorer) and enter `http://dlinkrouter`, `http://dlinkrouter.local` or `http://192.168.0.1` into the address bar.



**Step 2:** Enter your login information. If you have not changed the default settings, the password field should be left blank. Click **Login**.

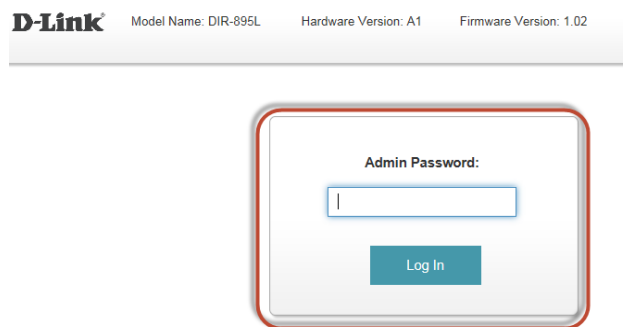

**Step 3:** Click the **Settings** tab at the top of the page and then click **Wireless** from the menu list.

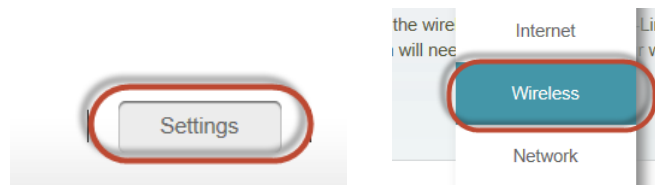

**Step 4:** Select **Disabled** for **Smart Connect**.

**Smart Connect**



## Step 5: 2.4Ghz :

- Click on **Advanced Settings**.
- Select **WPA/WPA2-Personal** as **Security Mode**.
- Enter a **Wireless Password** beside **Password**.

### 2.4GHz

Status:  Enabled

Wi-Fi Name (SSID): DIR859\_2.4G

Password: 12345678

Your password must be between 8-63 characters length

[Advanced Settings...](#)

---

Security Mode: WPA/WPA2-Personal

802.11 Mode: Mixed 802.11b/g/n

Wi-Fi Channel: Auto

Transmission Power: High

Channel Width: Auto 20/40 MHz

HT20/40 Coexistence:  Enabled

Visibility Status: Visible

[Schedule:](#) Always Enable

## Step 6: Primary 5Ghz :

- Click on **Advanced Settings**.
- Select **WPA/WPA2-Personal** as **Security Mode**.
- Enter a **Wireless Password** beside **Password**.

### Primary 5GHz

Status:  Enabled

Wi-Fi Name (SSID): dlink-D55C

Password: 12345678

[Advanced Settings...](#)

---

Security Mode: WPA/WPA2-Personal

802.11 Mode: Mixed 802.11a/n/ac

Wi-Fi Channel: Auto

Transmission Power: High

Channel Width: Auto 20/40/80 MHz

Visibility Status: Visible

[Schedule:](#) Always Enable

## Step 7: Secondary 5GHz :

- Click on **Advanced Settings**.
- Select **WPA/WPA2-Personal** as **Security Mode**.
- Enter a **Wireless Password** beside **Password**.

### Secondary 5GHz

Status:	Enabled
Wi-Fi Name (SSID):	895L-5B
Password:	12345678
	<a href="#">Advanced Settings</a>
Security Mode:	WPA/WPA2-Personal
802.11 Mode:	Mixed 802.11a/n/ac
Wi-Fi Channel:	Auto
Transmission Power:	High
Channel Width:	Auto 20/40/80 MHz
Visibility Status:	Visible
<a href="#">Schedule</a> :	Always Enable

## Step 8: Click on Save

Settings >> Wireless	<a href="#">Guest Zone</a>	<a href="#">Save</a>
----------------------	----------------------------	----------------------

--- END ---