

FAQ: How to config Ethernet WAN on DSL-2750E?

Release date: 24/10/2014

Model Support: DSL-2750E


H/W: T1

S/W: 1.09 or Above

D-Link[®] Technical Support Setup Procedure

การตั้งค่าเพื่อให้พอร์ต LAN ทำหน้าที่เป็น Ethernet WAN บน DSL-2750E ทำได้อย่างไร

ขั้นตอนที่ 1: เปิดเว็บเบราว์เซอร์ เช่น อินเทอร์เน็ตเอกซ์พลอเรอร์ , โมซิลลา , ไฟร์ฟอกซ์ , ซาฟารี และอื่น ๆ บนช่องของ Address ให้ใส่ค่าของ IP Address ของ DSL-2750E เป็น **192.168.1.1** และให้กดปุ่ม Enter บนคีย์บอร์ดของคุณ

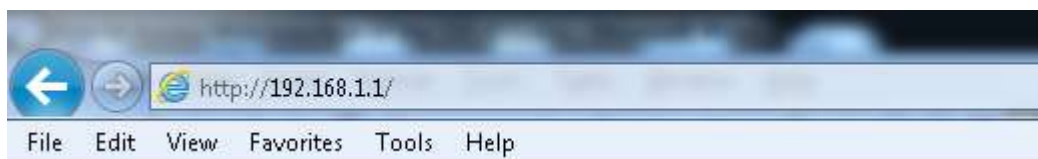

ขั้นตอนที่ 2 : หน้าจอเพื่อให้ทำการล็อกอินจะปรากฏขึ้น ให้ค่าของบัญชีผู้ใช้งาน (User Name) และรหัสผ่าน(Password) เป็น **“admin”** โดยใส่เป็นลักษณะอักษรตัวพิมพ์เล็ก และให้ทำการคลิกบนปุ่ม


Log In

The D-Link logo, consisting of the text "D-Link" in a white, sans-serif font, set against a solid orange rectangular background.

A screenshot of the D-Link login page. The page has an orange header with the word "LOGIN" in white. Below the header, the text "Input username and password" is displayed. There are two input fields: "Username" and "Password". The "Username" field contains the text "admin" and has a dropdown arrow next to it. To the right of the field, the text "default username : admin" is shown in red. The "Password" field contains several black dots. To the right of the field, the text "default password : admin" is shown in red. Below the input fields, there is a checkbox with the label "Remember my login info. on this computer". At the bottom of the form, there is a "Login" button.

ขั้นตอนที่ 3: หน้าจอของเว็บอินเตอร์เฟส จะแสดงหน้าการตั้งค่าบนเว็บเบราว์เซอร์ ไปที่เมนู Setup> Internet Setup) หลังจากนั้น เลือก WAN Access Type เป็น Ethernet เพื่อเสร็จสิ้นการตั้งค่า กดปุ่ม Add

Noted: การเชื่อมต่อผ่านฟังก์ชัน WAN Access จะต้องต่อเชื่อมผ่านพอร์ต LAN-4 เท่านั้น

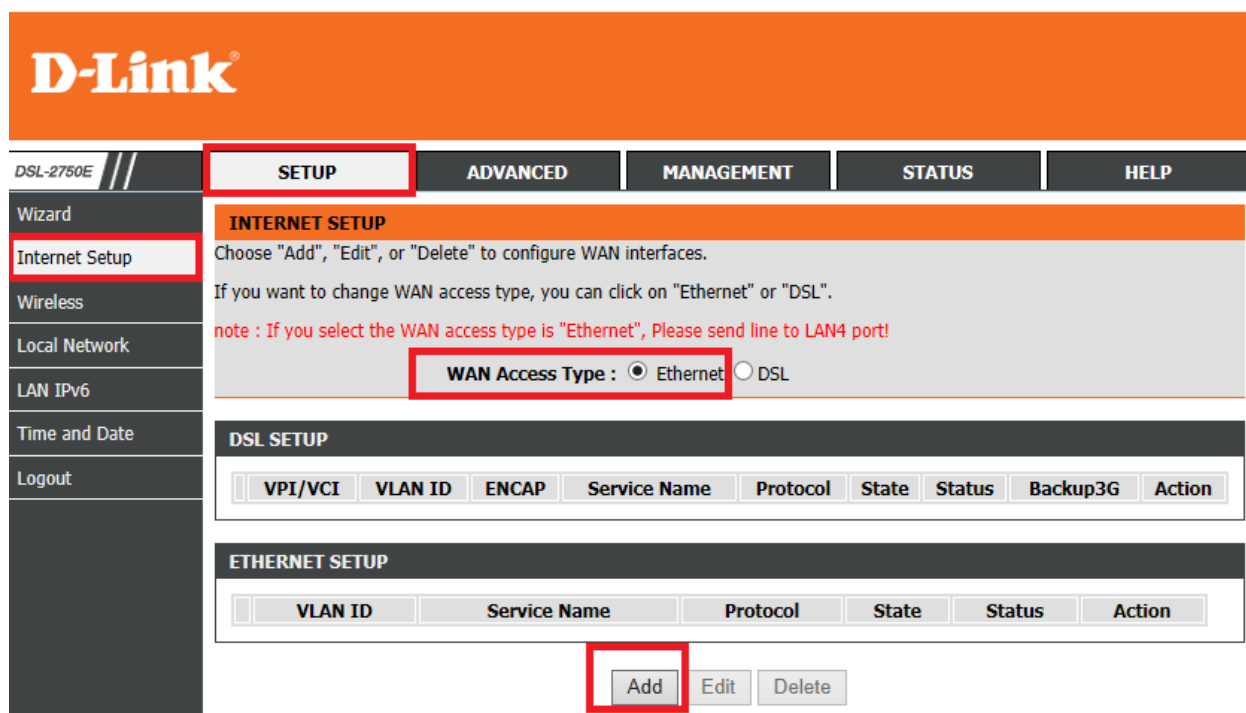

ขั้นตอนที่ 4: ในเมนูของ Protocol ให้เลือกวิธีการ (PPPoE ,Dynamic IP , Static IP) ที่เราเลือกใช้ตามความเหมาะสมของแต่ละบุคคลและการเชื่อมต่อ โดยหลังจากตั้งค่าเรียบร้อยแล้ว ให้กดปุ่ม **Apply**

The screenshot shows the D-Link DSL-2750E web interface. The top navigation bar includes 'DSL-2750E', 'SETUP', 'ADVANCED', 'MANAGEMENT', 'STATUS', and 'HELP'. The left sidebar contains 'Wizard', 'Internet Setup', 'Wireless', 'Local Network', 'LAN IPv6', 'Time and Date', and 'Logout'. The main content area is titled 'INTERNET SETUP' and contains the following elements:

- A header: **INTERNET SETUP**
- A description: In this page, you can configure an Ethernet-LAN identifier and select a service category.
- A 'CONNECTION TYPE' dropdown menu with the following options: PPP over Ethernet (PPPoE), Dynamic IP, Static IP, and Bridging (selected).
- A field for '802.1Q VLAN ID' with the value '0' and a note '(0 = disable, 1 - 4094)'. The label '802.1Q' is bolded.
- A section titled 'NETWORK ADDRESS TRANSLATION SETTINGS' containing:
 - 'Enable Bridge Service' with a checked checkbox.
 - 'Service Name' with the value 'br_0_0'.
- 'Apply' and 'Cancel' buttons at the bottom.


โดยในตัวอย่างนี้เลือกเป็น Dynamic IP

DSL-2750E	SETUP	ADVANCED	MANAGEMENT	STATUS	HELP
Wizard	INTERNET SETUP				
Internet Setup	In this page, you can configure an Ethernet-LAN identifier and select a service category.				
Wireless	CONNECTION TYPE				
Local Network	Protocol : <input type="text" value="Dynamic IP"/>				
LAN IPv6	802.1Q VLAN ID : <input type="text" value="0"/> (0 = disable, 1 - 4094)				
Time and Date	IPv4 Enable : <input checked="" type="checkbox"/>				
Logout	IPv6 Enable : <input type="checkbox"/>				
	NETWORK ADDRESS TRANSLATION SETTINGS				
	Enable NAT : <input checked="" type="checkbox"/>				
	NAT Type : <input type="text" value="Full Cone Nat"/>				
	Enable WAN Service : <input checked="" type="checkbox"/>				
	Service Name : <input type="text" value="mer_0_0"/>				
	<input type="button" value="Apply"/> <input type="button" value="Cancel"/>				

D-Link® Technical Support Setup Procedure

How to config Ethernet WAN of DSL-2750E

Step 1: Open a web browser such as Internet Explorer, Mozilla Firefox, Safari and etc. On the Address bar, enter the LAN IP Address of the DSL-2750E. The default ip address is **192.168.1.1**. Press 'Enter' key on your keyboard. Please enter the new ip address of the router if you have changed it.

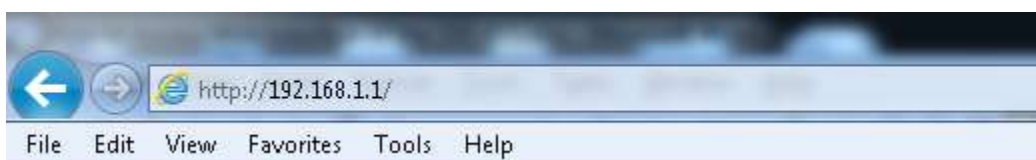

Step 2: A login screen will appear, type in the User Name and Password as "**admin**" all in lower case (This is the default setting, please enter the new username and password if you have changed it). Click on the **Log In** button.

A screenshot of the login form on the D-Link router's web interface. The form has an orange header with the word "LOGIN" in white. Below the header, the text "Input username and password" is displayed. There are two input fields: "Username" with a dropdown menu showing "admin" and a red label "default username : admin"; and "Password" with a masked field of six dots and a red label "default password : admin". Below these fields is a checkbox labeled "Remember my login info. on this computer". At the bottom of the form is a "Login" button.

Step 3: The DSL-2750E web interface will now show up on your web browser.
Go to Setup> Internet Setup
Noted: If you select the WAN Access type is Ethernet, Please sent line to LAN4 Port

D-Link

DSL-2750E // **SETUP** ADVANCED MANAGEMENT STATUS HELP

Wizard
Internet Setup
Wireless
Local Network
LAN IPv6
Time and Date
Logout

INTERNET SETUP
Choose "Add", "Edit", or "Delete" to configure WAN interfaces.
If you want to change WAN access type, you can click on "Ethernet" or "DSL".
note : If you select the WAN access type is "Ethernet", Please send line to LAN4 port!

WAN Access Type : Ethernet DSL

DSL SETUP

VPI/VCI	VLAN ID	ENCAP	Service Name	Protocol	State	Status	Backup3G	Action
---------	---------	-------	--------------	----------	-------	--------	----------	--------

ETHERNET SETUP

VLAN ID	Service Name	Protocol	State	Status	Action
---------	--------------	----------	-------	--------	--------

Add Edit Delete

Step 4: On Protocol menu , please you select one from drop down list (PPPoE , Dynamic IP , Static IP)
You must select mode follow up your infrastructure.
After you done please you click Apply button

The screenshot shows the D-Link DSL-2750E Internet Setup page. The 'CONNECTION TYPE' section has a dropdown menu open with 'Bridging' selected. The '802.1Q VLAN ID' is set to 0. The 'NETWORK ADDRESS TRANSLATION SETTINGS' section has 'Enable Bridge Service' checked and 'Service Name' set to 'br_0_0'. Buttons for 'Apply' and 'Cancel' are visible at the bottom.

For this example use Dynamic IP

The screenshot shows the D-Link DSL-2750E Internet Setup page with 'Dynamic IP' selected in the 'CONNECTION TYPE' dropdown. The '802.1Q VLAN ID' is 0. In the 'NETWORK ADDRESS TRANSLATION SETTINGS' section, 'Enable NAT' is checked, 'NAT Type' is 'Full Cone Nat', 'Enable WAN Service' is checked, and 'Service Name' is 'mer_0_0'. 'Apply' and 'Cancel' buttons are at the bottom.

ฝ่ายสนับสนุนทางด้านเทคนิค

Call Center หมายเลขโทรศัพท์ 02-6617997

ภาษาไทย : จันทร์ ถึง ศุกร์ เวลา 9.00 น. – 18.00 น.

Thai : Mon – Fri : Time 9.00 – 18.00.

ภาษาอังกฤษ : เสาร์ , อาทิตย์ , วันหยุดนซ์ตฤกษ์ และ วันธรรมดา หลัง 18.00 น.

English : Sat – Sun , Public Holiday and after 18.00 weekday.

Website : www.dlink.co.th

email: support@dlink.com.sg

Facebook : <http://www.facebook.com/DLinkThailandFans>

Nationwide D-Link Service Centres

Chiang Mai Branch

2/1 Moo 3, Chiang Mai-Lampang Road
Tumbon Chang Pueak, Amphoe Muang Chiang Mai
Changwat Chiang Mai 50300,
Thailand

Tel : +66 (0) 5340-9482-6
Fax : +66 (0) 5340-9486
Operating hours:
Mondays till Friday
9am to 6pm

Phitsanulok Branch

117/7 Praongdam Road
Tumbon Nai Muang,
Amphoe Muang Phitsanulok
Changwat Phitsanulok 65000, Thailand

Tel : +66 (0) 5521-2323-5
Fax : +66 (0) 5521-2326
Operating hours:
Mondays till Friday
9am to 6pm

Cham Issara Tower II

3rd Floor, Cham Issara Tower II
2922/138 New Perchuri Road
Khwang Bangkapi, Khet Huay-Kwang,
Bangkok 10320, Thailand

Tel : +66 (0) 2308-2040
Fax : +66 (0) 2308-2024
Call Center : +66 (0) 2716-6669
Operating hours:
Mondays till Friday
9am to 6pm

Pantip Plaza Branch

4th Fl. Pantip Plaza 604/3 Petchburi Road Room
439-440
Kwang Thanon Petchburi, Khet Ratchathewi
Bangkok 10400, Thailand

Tel : +66 (0) 2656 6037
Tel : +66 (0) 2656 6054
Fax : +66 (0) 2656 6042
Operating hours:
Mondays till Sunday
10am to 7pm

Rayong Branch

217/24 Sukhumvit Road
Tumbon Noen Phra,
Amphoe Muang Rayong
Changwat Rayong 21000, Thailand

Tel : +66 (0) 3880-0631-3
Fax : +66 (0) 3880-0634
Operating hours:
Mondays till Sunday
9am to 6pm

Surat Thani Branch

412/8 Talat Mai Road
Tumbon Talat,
Amphoe Muang Surat Thani
Changwat Surat Thani 84000, Thailand

Tel : +66 (0) 7721-7907-10
Fax : +66 (0) 7721-7910
Operating hours:
Mondays till Friday
9am to 6pm

Phuket Branch

156/3 Phang Nga Road
Tumbon Taratyai,
Amphoe Muang Phuket
Changwat Phuket 83000, Thailand

Tel : +66 (0) 7623-2906-9
Fax : +66 (0) 7623-2909
Operating hours:
Mondays till Friday
9am to 6pm

Hat Yai Branch

48/106 Phadungpakdee Road
Tumbon Hatyai, Amphoe Hatyai
Changwat Songkhla 90110, Thailand

Tel : +66 (0) 7435-4559-61
Fax : +66 (0) 7435-4561
Operating hours:
Mondays till Friday
9am to 6pm