

Quick Installation Guide for DSL-G604T (July 2004)
(for Users in Thailand ONLY)

1. DSL-G604T is a 3-in-1 802.11g 54Mbps wireless ADSL router, which has a built-in ADSL modem. DSL-G604T has integrated 802.11g wireless access point and a four-port (10/100Mbps) switch. Without additional equipment, DSL-G604T allows all of the wired & wireless computers in your home or office network to access the broadband Internet at the same time via a single ADSL telephone line.

Follow the steps below to configure DSL-G604T.

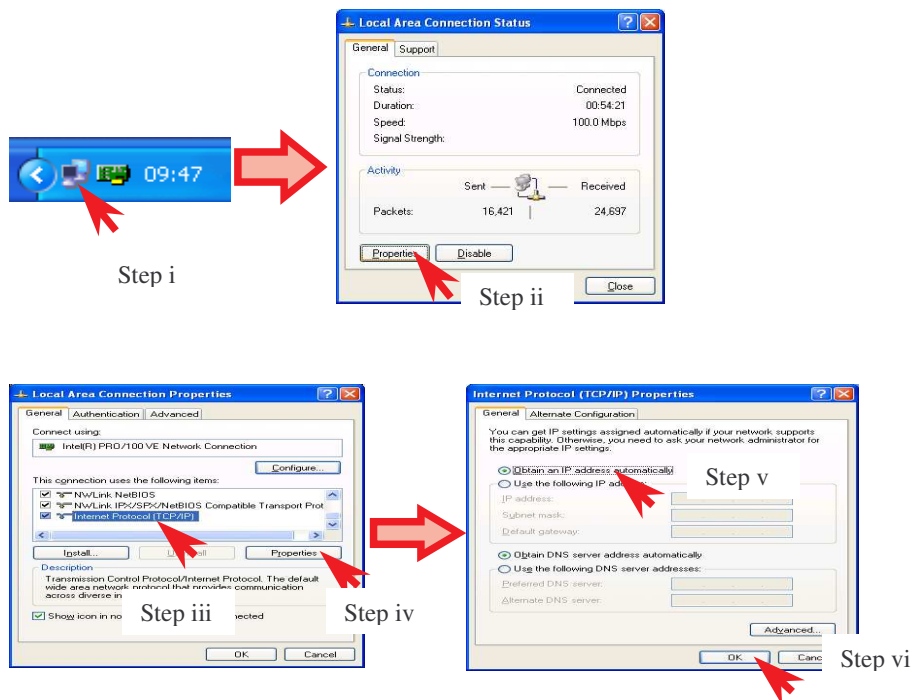


Figure 1



2. Configure your PC to “**Obtain an IP Address Automatically**” from DSL-G604T, which is pre-configured as DHCP server. Connect you PC to DSL-G604T Ethernet port as shown in Figure 1.

Click Network connection icon at the bottom right hand corner of Windows & follow the steps from [i] to [vi].

Once it is completed, the computer is configured as DHCP client, which will obtain an IP address from DSL-G604T automatically.




3. Run the IE and make sure under [Tools] -> [Internet Options] -> [Connections] -> [LAN Settings], "Proxy Server" is un-checked.
4. Step 1: Enter the default IP address **192.168.1.1** in the URL address field.
Step 2: Enter default Login Name "**admin**", Password "**admin**" and click [Login].

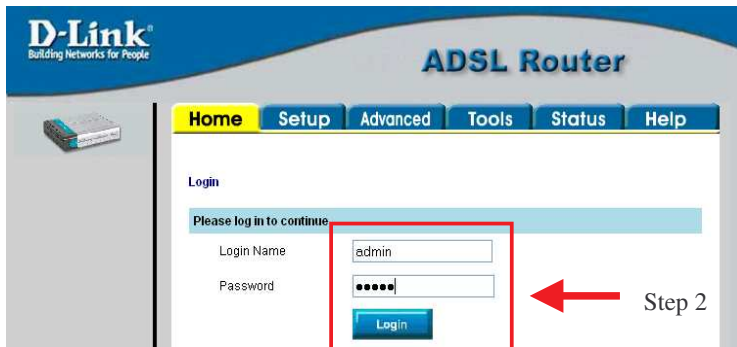

Setup PPPoE Connection

5. Goto Section [7] for the configuration of PPPoA connection.
Step 3a/4a: Click [Setup] and choose [Connection 1].

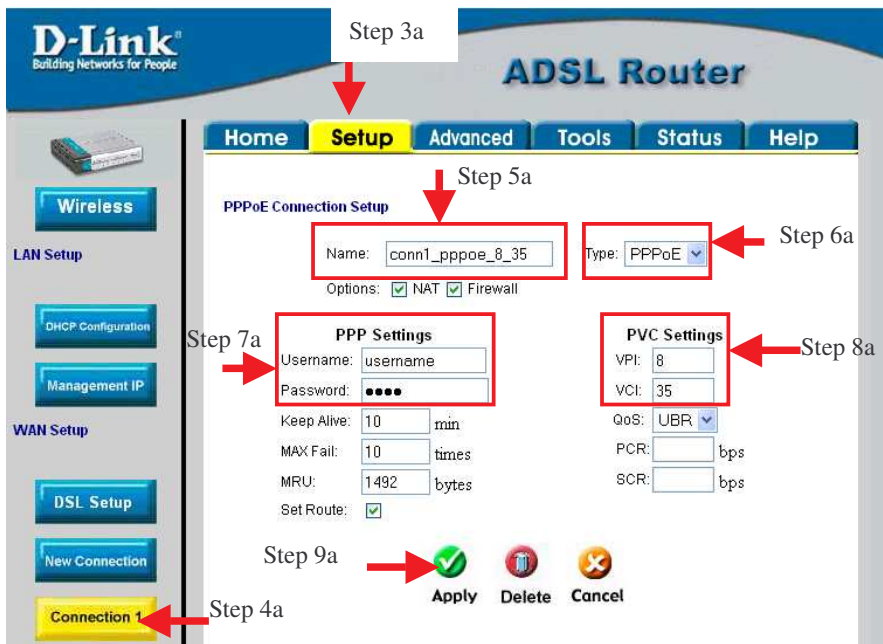


6. Step 5a: Rename the connection name.
Step 6a: Select **PPPoE**.
Step 7a: Enter **Username & Password** of ADSL broadband account.
Step 8a: Enter the **VPI & VCI** values.

Note:

- i. Both VPI and VCI values are provided by ISP. Please obtain these values from your ISP. For TA ADSL line, you may use VPI: 0 / VCI: 100 and Type: PPPoE.
 - ii. Different ISP may have different VPI and VCI values.
- Step 9a: Click **Apply** to save the changes & goto Section [9].

Setup PPPoA Connection

7. Step 3b/4b: Click [Setup] and choose [Connection 1]

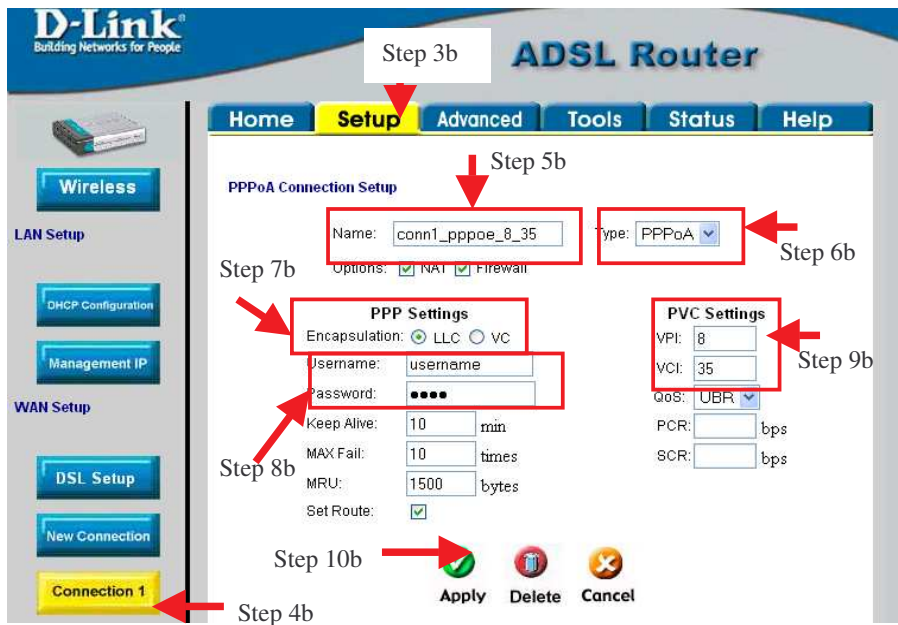


8. Step 5b: Rename the connection name
Step 6b: Select **PPPoA**
Step 7b: Select **LLC** or **VC** (**Please check with your ISP.**)
Step 8b: Enter **Username** and **Password**
Step 9b: Enter the **VPI** and **VCI** values

Note:

- i. Both VPI and VCI values are provided by ISP. Please obtain these values from your ISP. For TA ADSL line, you may use VPI: 0 / VCI: 100 and Type: PPPoE.
 - ii. Different ISP may have different VPI and VCI values.
- Step 10b: Click **Apply** to save the changes.

9. Step 11: Click **Tools**.
- Step 12: Click **System Commands**.
- Step 13: Click **Save All**.

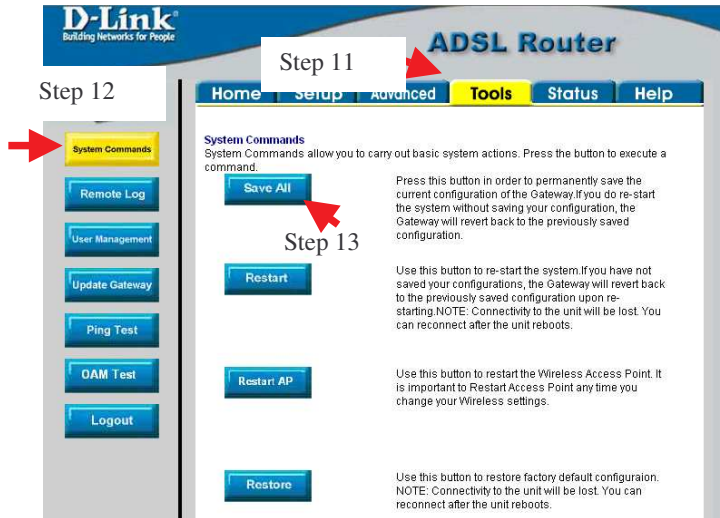

For any assistance, kindly access www.dlink.in.th or email us support@dlink.com.sg.
D-Link International Pte Ltd
Office: (65) 6774-6233
Fax: (65) 6774-6322