



**Step 1:** Unplug the **Power** to your Cable/DSL Internet Modem

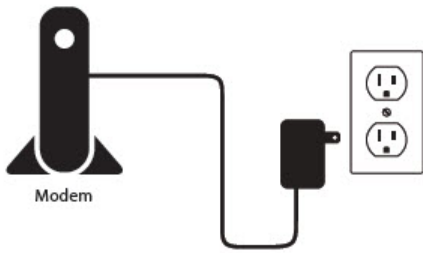


**Step 2:** Connect an Ethernet cable from your computer/laptop to a **LAN** port (Port 1,2,3 or 4) on the DIR-605L

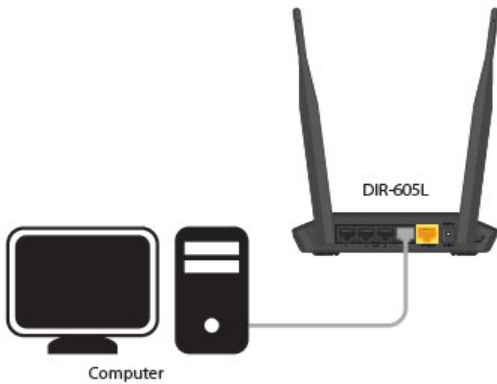

**Step 3:** Connect your Cable/DSL modem to the **Yellow Internet Port** on the DIR-605L



**Step 4:** Power on both the DIR-605L and your Internet Cable/DSL Modem

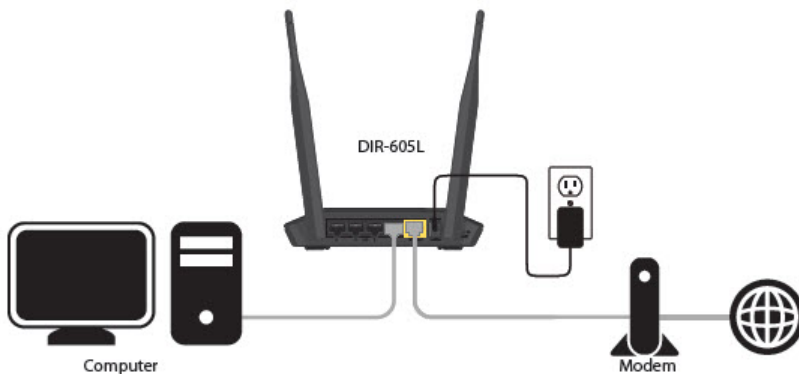


**Step 5:** Open your Internet browser (Internet Explorer/Firefox) and enter <http://192.168.0.1> into the address bar (In some cases, you may get automatically directed here)




**Step 6:** The Setup Wizard should appear

Select your preferred Language and click Start

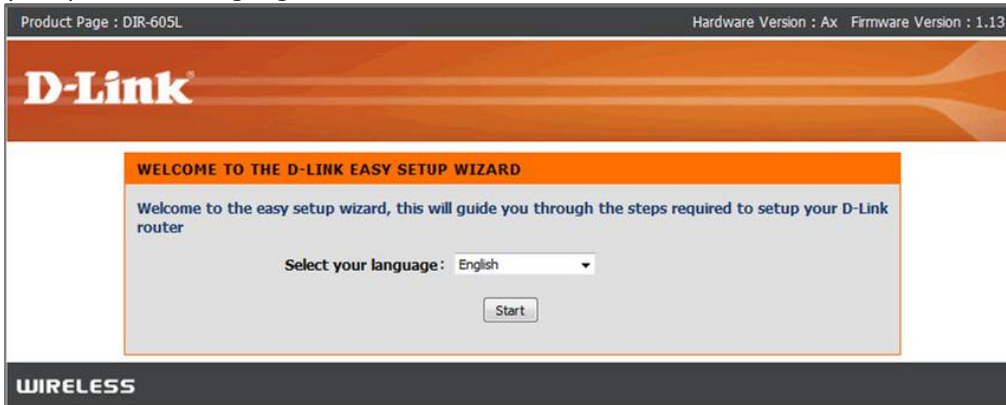

Select Manual Configuration

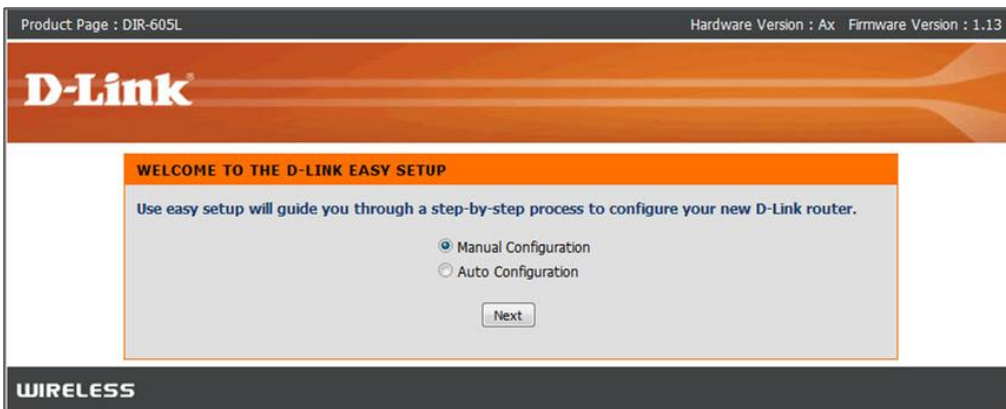


Select your Internet Connection type: **Dynamic** or **PPPoE**

- Dynamic IP (DHCP) - Cable Internet Service (Rogers, Shaw, Cogeco, Videotron, Teksavvy)

Setup a Wireless Network Name and Password

***D-Link Suggests Securing your wireless network with WPA/WPA encryption***

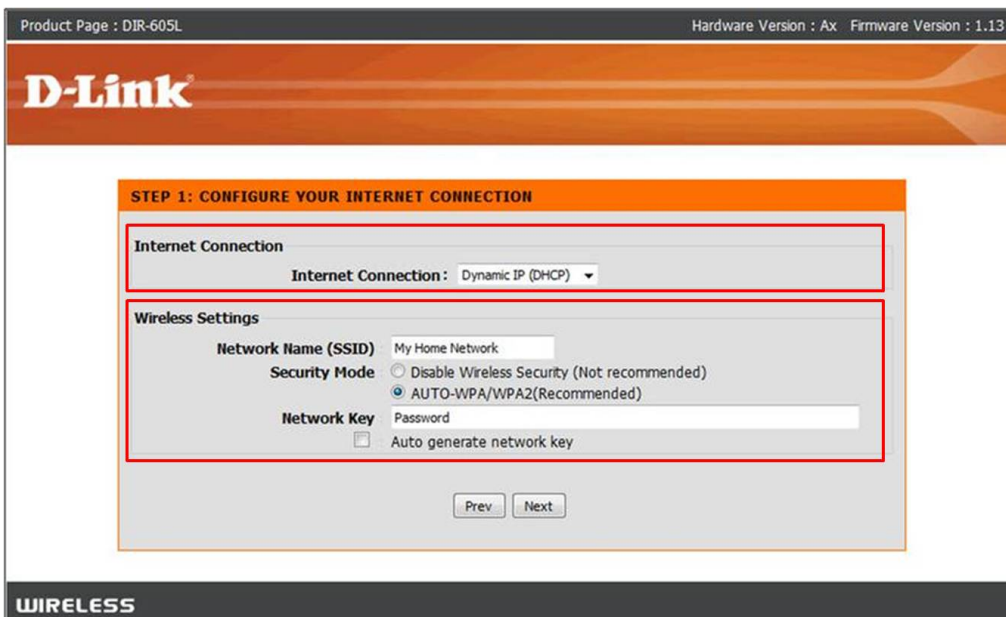

PPPoE - DSL Internet Service (Bell Sympatico, Teksavvy DSL, Sasktel, Acanac)  
Username: Your Internet username (Provided by your Internet Service Provider)  
Password: Your Internet Password (Provided by your Internet Service Provider)  
Setup a Wireless Network Name and Password

**D-Link Suggests Securing your wireless network with WPA/WPA encryption**

Product Page : DIR-605L Hardware Version : Ax Firmware Version : 1.13

**D-Link**

**STEP 1: CONFIGURE YOUR INTERNET CONNECTION**

Internet Connection

Internet Connection: PPPoE

User Name: username@isp.com

Password: .....

Confirm Password: .....

Wireless Settings

Network Name (SSID): My Home Network

Security Mode:  Disable Wireless Security (Not recommended)  AUTO-WPA/WPA2(Recommended)

Network Key: Password

Auto generate network key

Prev Next

**WIRELESS**

Enter an administrator password for the router (**Note: This is not the wireless password- This is the password for logging into the router configuration**)

Product Page : DIR-605L Hardware Version : Ax Firmware Version : 1.13

**D-Link**

**STEP 2: SET YOUR PASSWORD**

By default, your new D-Link Router does not have a password configured for administrator access to the Web-based configuration pages. To secure your new networking device, please set and verify a password below

Password: .....

Confirm Password: .....

Prev Next

**WIRELESS**

Select your Time Zone

Product Page : DIR-605L Hardware Version : Ax Firmware Version : 1.13

**D-Link**

**STEP 3: SELECT YOUR TIME ZONE**


Select the appropriate time zone for your location. This information is required to configure the time-based options for the router.

Time Zone : (GMT-05:00) Eastern Time (US/Canada)

Prev Next

**WIRELESS**

The router will apply the new settings and reboot. You should be prompted with the routers Login Screen  
Enter the username: admin and your created password (created earlier)

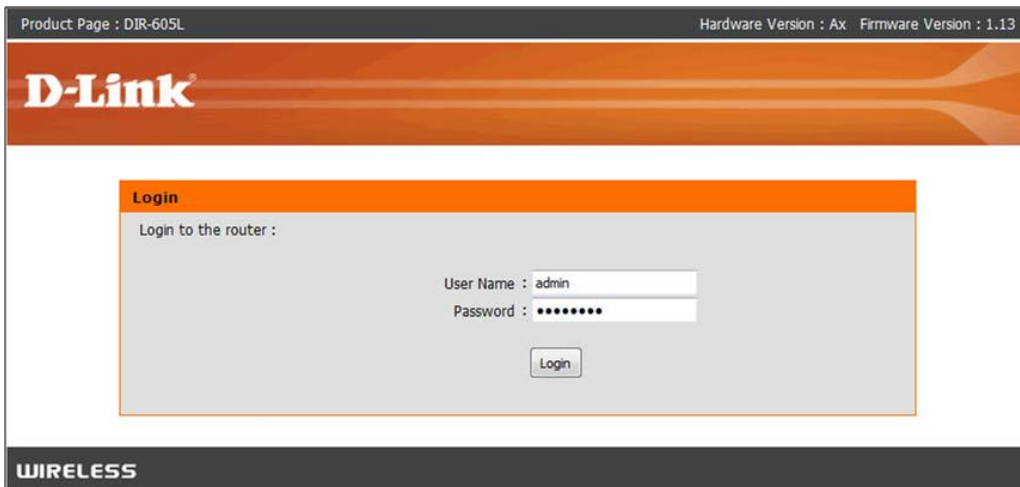

Product Page : DIR-605L Hardware Version : Ax Firmware Version : 1.13

**D-Link**

**Login**


Login to the router :

User Name : admin  
Password : ●●●●●●

Login

**WIRELESS**

Your current Network settings are display. Everything but your mydlink setting should be configured  
Click on the **Configure** button under the **mydlink Account settings**

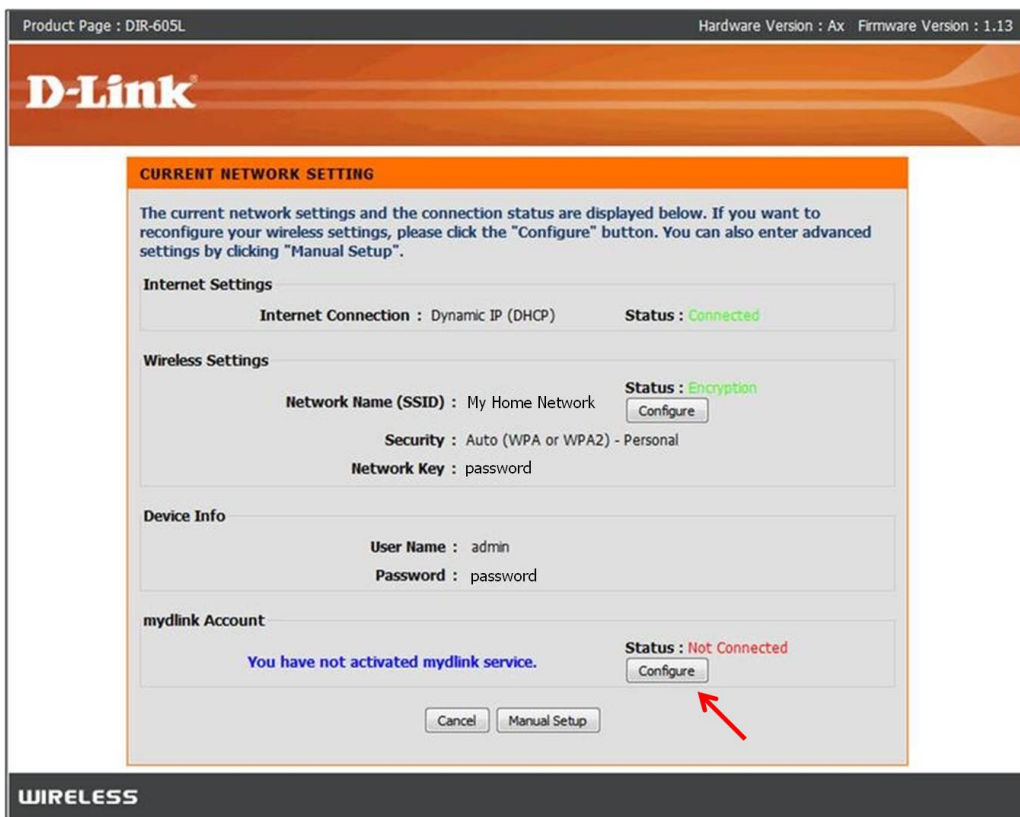

Product Page : DIR-605L Hardware Version : Ax Firmware Version : 1.13

**D-Link**

**CURRENT NETWORK SETTING**

The current network settings and the connection status are displayed below. If you want to reconfigure your wireless settings, please click the "Configure" button. You can also enter advanced settings by clicking "Manual Setup".

**Internet Settings**  
Internet Connection : Dynamic IP (DHCP) Status : Connected

**Wireless Settings**  
Network Name (SSID) : My Home Network Status : Encryption  
Security : Auto (WPA or WPA2) - Personal  
Network Key : password


**Device Info**  
User Name : admin  
Password : password

**mydlink Account**  
You have not activated mydlink service. Status : Not Connected  
Configure


Cancel Manual Setup

**WIRELESS**

Create a new account or if you already have an existing mydlink account, enter your login details.

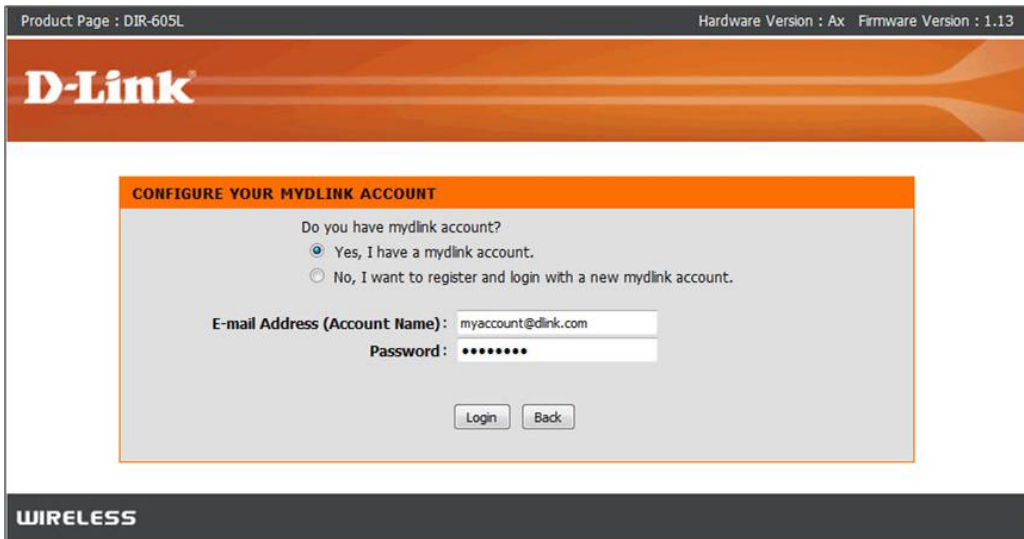

Your DIR-605 is now configured.

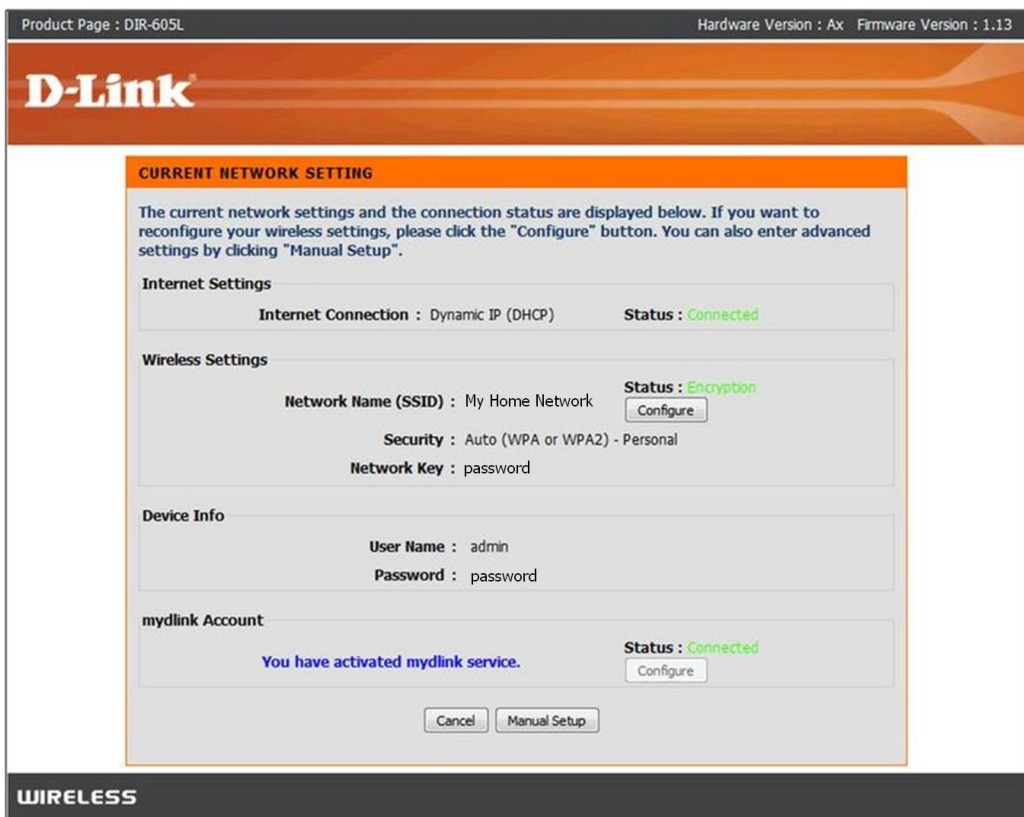

To view your DIR-605L through the mydlink portal. Visit <http://mydlink.com> and log into your account. Your DIR-605L should now be visible.

**My Devices**
**My Profile**

- 31316500
- 31300085
- 31300066
- 30936540
- DIR-836L  
21765021
- 20987764
- DIR-605L  
20058996

**Router Status**
**Settings**


**Model Name** DIR-605L [Reboot](#)

**Network Name(SSID)** (2.4 GHz)

**Internet IP** 192.168.145.67

**LAN IP** 192.168.0.1

**Connected Devices** 0 device(s)

0003.5 kbps

0003.5 kbps

**Connection List**

Device	Device Name	IP Address	MAC Address	Block

**Suspect List**

Device	Device Name	Time	MAC Address	Block

**News**

2013/01/24 12:00

Firefox no longer supports Java Runti...


**Zero configuration**
**Top 5 FAQs**

1. How do I update my device's firmware manually?
2. Which device does the mydlink website support?
3. How do I install the mydlink lite app on my Android device?
4. Which web browsers can I use with mydlink?
5. How do I sign up for a mydlink account?

[GO](#)