



**Step 1:** Unplug the **Power** to your Cable/DSL Internet Modem




**Step 2:** Connect an Ethernet cable from your computer/laptop to a **LAN** port (Port 1,2,3 or 4) on the DIR-615

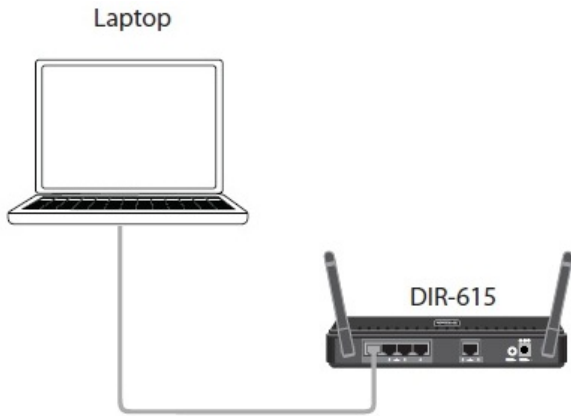

**Step 3:** Connect your Cable/DSL modem to the **Yellow Internet Port** on the DIR-615

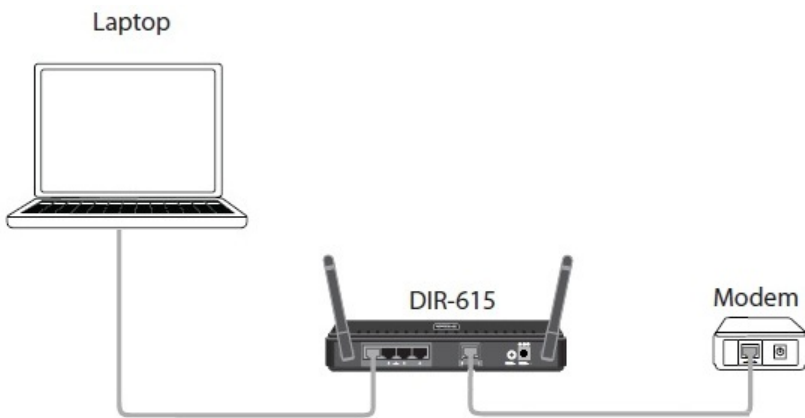

**Step 4:** Power on both the DIR-615 and your Internet Cable/DSL Modem

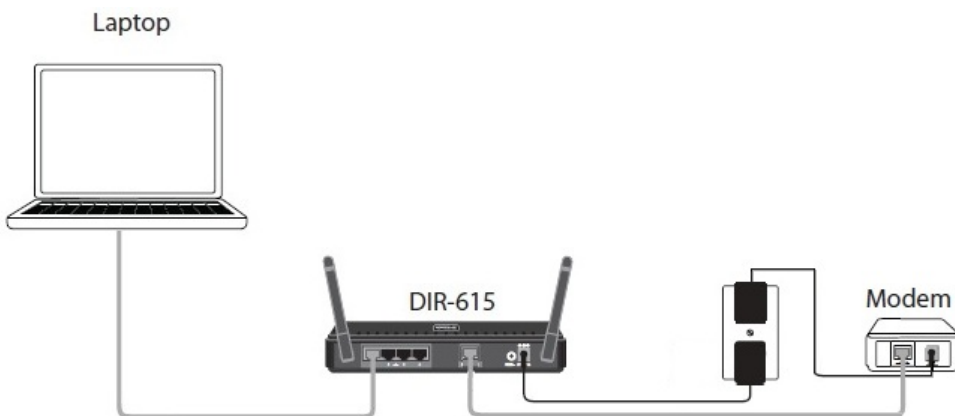


**Step 5:** Open your Internet browser (Internet Explorer/Firefox) and enter <http://192.168.0.1> into the address bar.




**Step 6:** You should be prompted with the D-Link Quick Router Setup Wizard, Click Next to Begin.

**Note:** This wizard will only appear at the first configuration. If your router has been configured previously, you will need to reset it to go through the setup.


**Reset Procedure:** With the router powered on, Press and hold the reset button (on the back of the router) for 10 seconds and release. The lights on the front of the router should all flash and reboot.)- Repeat step 5

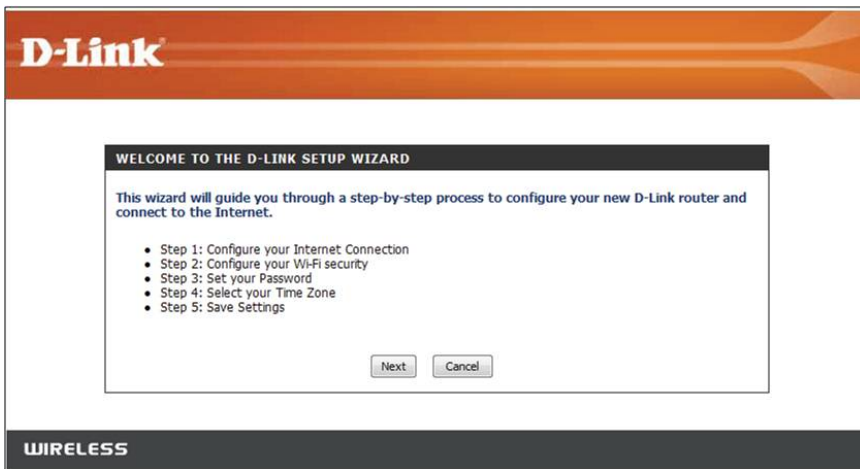

The DIR-615 will perform a scan to determine the type of internet service you have. If successful, the Internet Setup will be skipped.

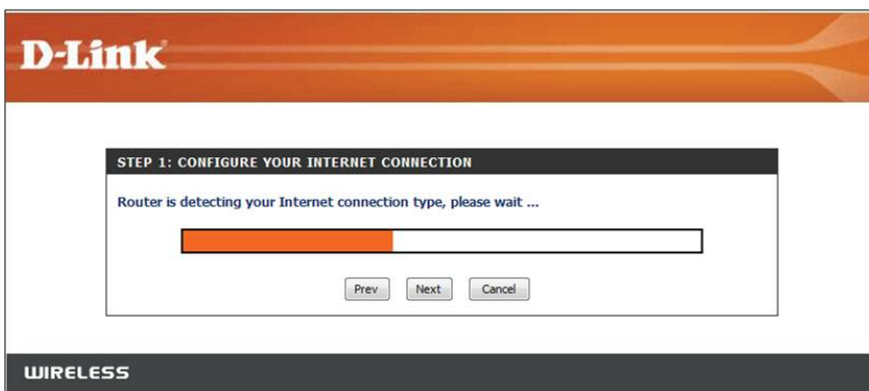

If the scan was not successful, you will be prompted to select your Internet Type:  
**DHCP Connection (Dynamic IP Address)** - Cable Internet Service (Rogers, Shaw, Cogeco, Videotron, Teksavvy)  
• **Username / Password (PPPoE)** - DSL Internet Service (Bell Sympatico, Teksavvy DSL, Sasktel, Acanac)  
◦ Username: Your Internet username (Provided by your Internet Service Provider)  
◦ Password: Your Internet Password (Provided by your Internet Service Provider)




**STEP 1: CONFIGURE YOUR INTERNET CONNECTION**

Please select your Internet connection type below:

- DHCP Connection (Dynamic IP Address)**  
Choose this if your Internet connection automatically provides you with an IP Address. Most Cable Modems use this type of connection.
- Username / Password Connection (PPPoE)**  
Choose this option if your Internet connection requires a username and password to get online. Most DSL modems use this connection type of connection.
- Username / Password Connection (PPTP)**  
PPTP client.
- Username / Password Connection (L2TP)**  
L2TP client.
- Static IP Address Connection**  
Choose this option if your Internet Setup Provider provided you with IP Address information that has to be manually configured.

**WIRELESS**

Next is your Wireless Settings. Enter a New Wireless Network Name and Password. This password is what you will need when connecting to your wireless signal for the first time.



**STEP 2: CONFIGURE YOUR WI-FI SECURITY**


Give your Wi-Fi network a name.  
**Wi-Fi Network Name (SSID) :**  
dlink (Using up to 32 characters)

Give your Wi-Fi network a password.  
**Wi-Fi Password :**  
12345678 (Between 8 and 63 characters)

**WIRELESS**

Enter a password for your router. This password is needed when you want to log into the router configuration setup page.

**Note:** This is not your wireless password



**STEP 3: SET YOUR PASSWORD**

By default, your new D-Link Router does not have a password configured for administrator access to the Web-based configuration pages. To secure your new networking device, please set and verify a password below, and enabling CAPTCHA Graphical Authentication provides added security protection to prevent unauthorized online users and hacker software from accessing your network settings.


**Password :**

**Verify Password :**

**Enable Graphical Authentication :**


**WIRELESS**

Select your Time Zone

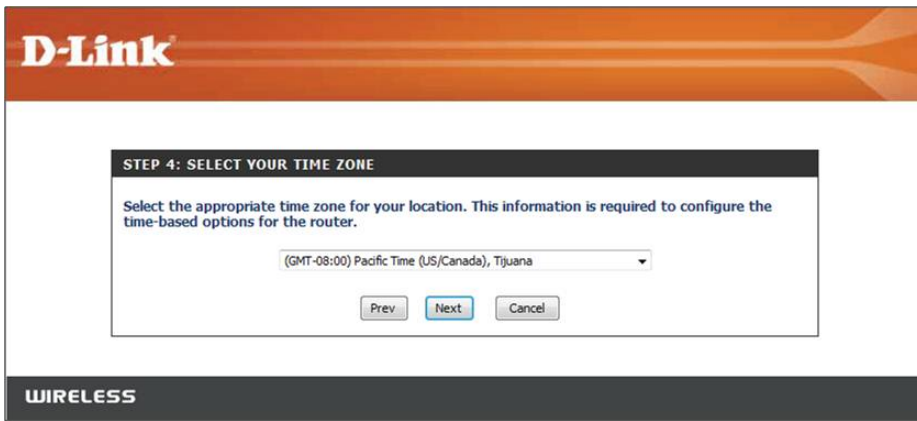

A summary of your wireless settings is displayed. This includes your wireless network name and your wireless password.

**Click Save**

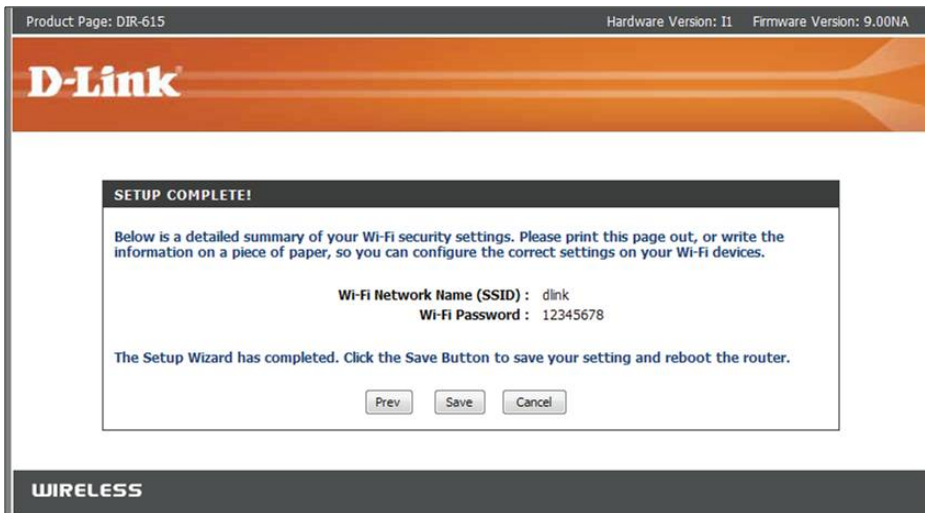

The router will now reboot to apply your new settings and the setup is complete.