



# D-Link® Technical Support Setup Procedure

## How to Perform a Firmware Update on the DSL-2750U


**Step 1:** Open a web browser such as Internet Explorer, Mozilla Firefox, Safari and etc. On the Address bar type in the LAN IP Address of the DSL-2750U which is **192.168.1.1** and then press on the Enter key on your keyboard.

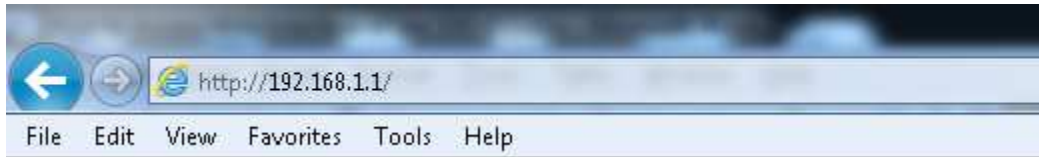


**Step 2:** A login screen will appear, type in the User Name and the Password as "admin" all in lower case and then type in Validate Code and then click on the **Log In** button.

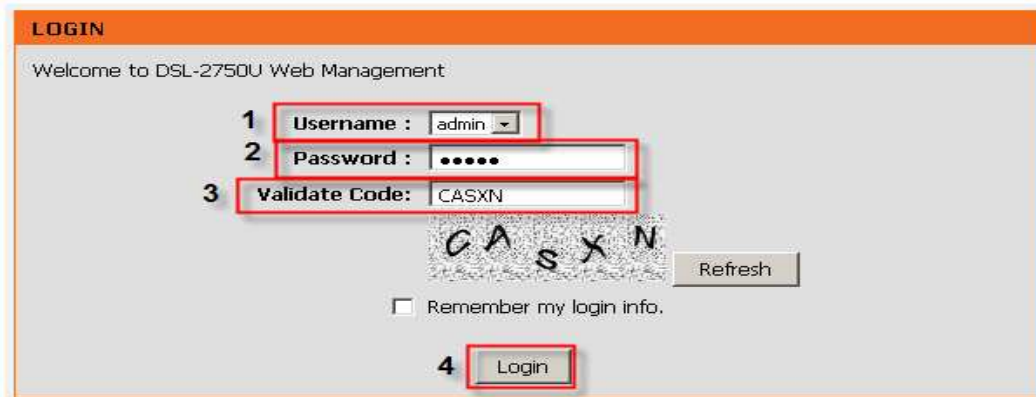


**Step 3:** Click on the **MAINTENANCE** tab and then select on **Firmware Update** on the left hand side.

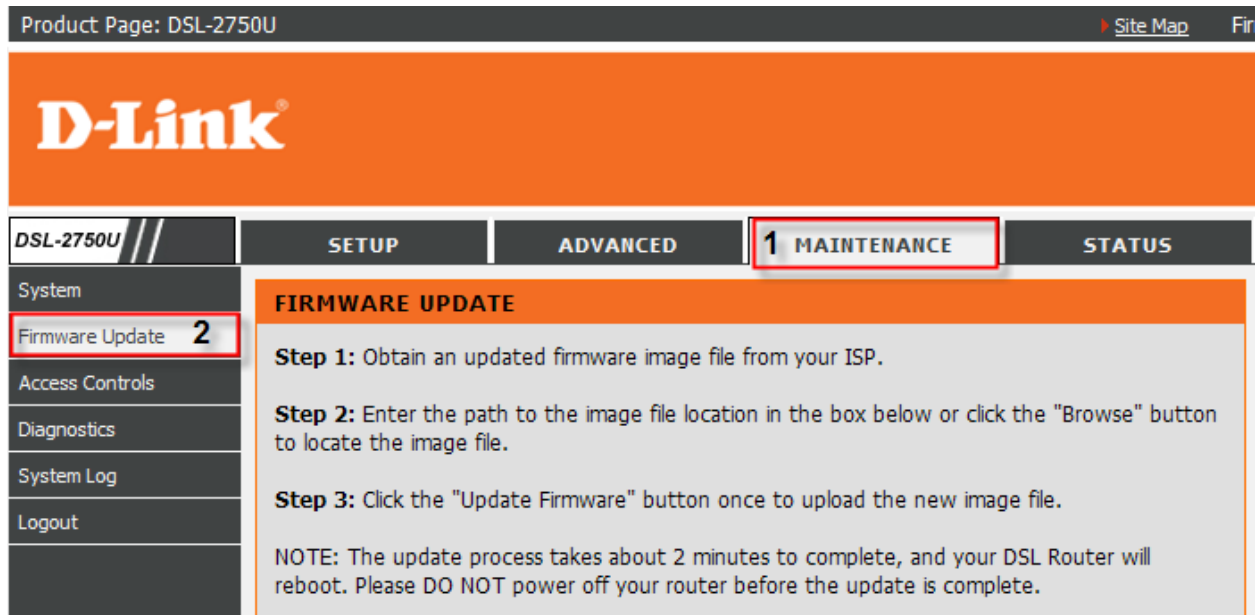A screenshot of the DSL-2750U web management interface. The top navigation bar shows "Product Page: DSL-2750U" and "Site Map". Below this is the D-Link logo. The main navigation menu has tabs for "DSL-2750U", "SETUP", "ADVANCED", "1 MAINTENANCE", and "STATUS". The "1 MAINTENANCE" tab is selected. On the left side, there is a sidebar menu with "Firmware Update" selected and numbered "2". The main content area is titled "FIRMWARE UPDATE" and contains three steps: Step 1: Obtain an updated firmware image file from your ISP. Step 2: Enter the path to the image file location in the box below or click the "Browse" button to locate the image file. Step 3: Click the "Update Firmware" button once to upload the new image file. A note at the bottom states: "NOTE: The update process takes about 2 minutes to complete, and your DSL Router will reboot. Please DO NOT power off your router before the update is complete."

**Step 4:** Under the **FIRMWARE UPADTE** section, click on the **Browse** button.

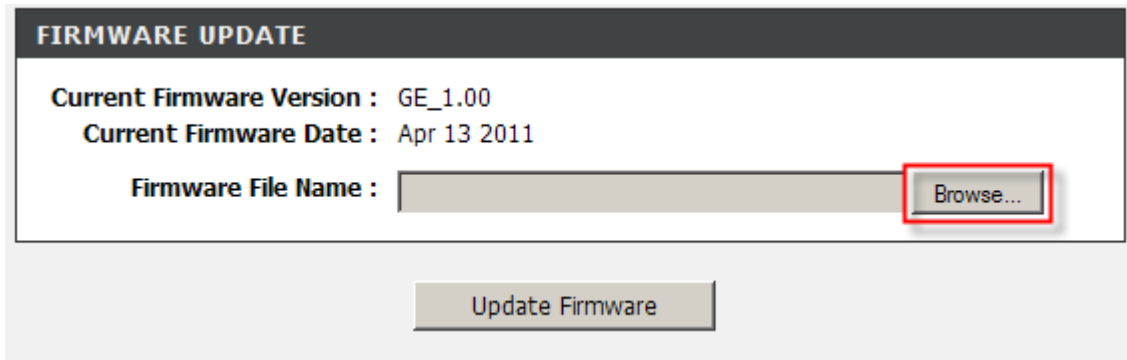

**Step 5:** On the Choose File to Upload dialog box, locate and select the firmware file for the DSL-2750U and then click on the **Open** button.

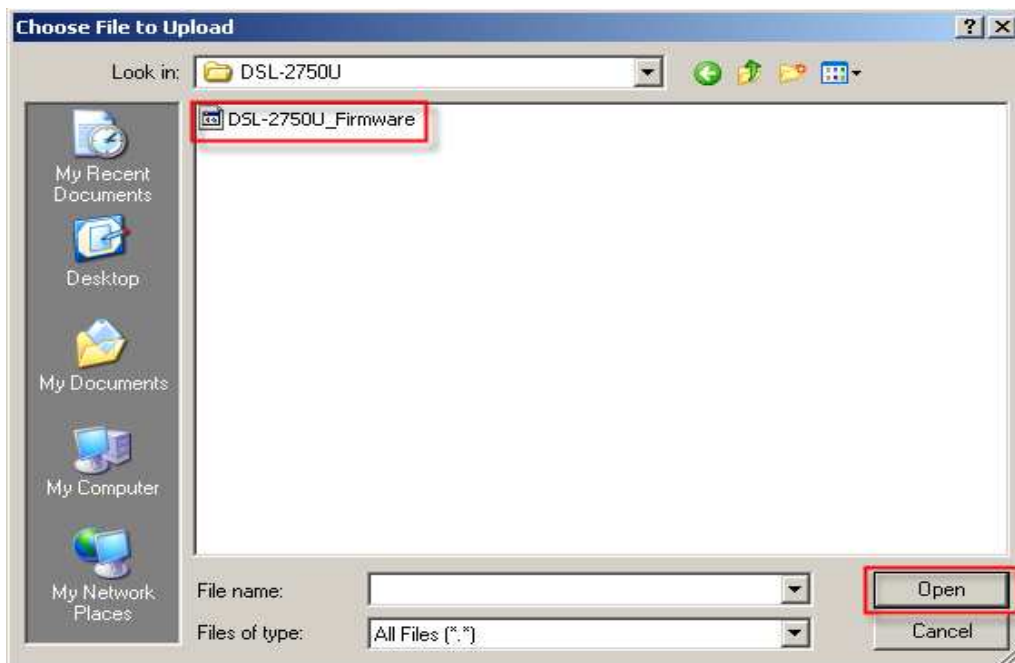

**Step 6:** Back on the **FIRMWARE UPDATE** section, click on the **Update Firmware** button.

