



# D-Link® Technical Support Setup Procedure

## Setup Wizard - Setting Up DCS-930L & DCS-932L WITHOUT mydlink Account

**Step 1:** Run the CD Set-Up that came with the DCS-930L/DCS-932L. Click **Autorun** to run mydlink Set-Up Wizard. On the mydlink Set-Up Wizard screen, click **Start** button.

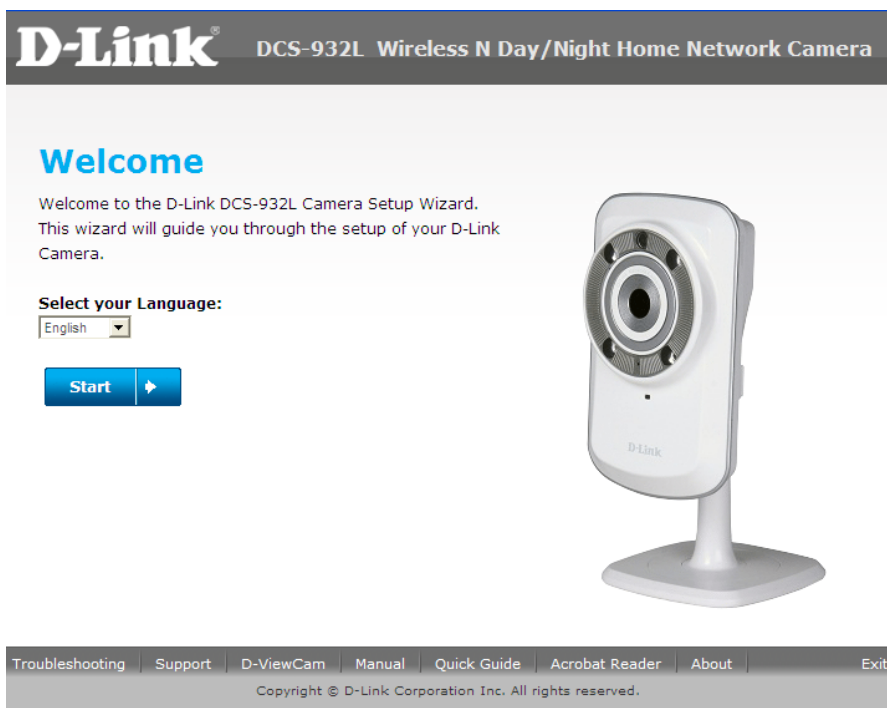

**Step 2:** Select the radio button **"No, my router does not have WPS Support"**. Click **Next** button.

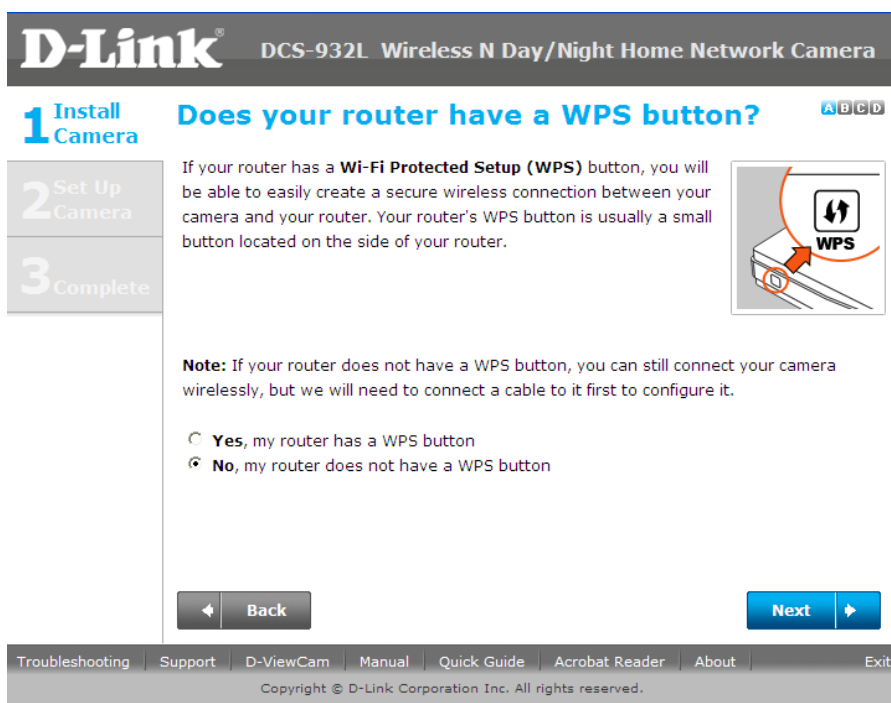

**Step 3:** Tighten the collar on the camera base after moving the camera to the position you want. Click **Next** button.

**D-Link**<sup>®</sup> DCS-932L Wireless N Day/Night Home Network Camera


**1** Install Camera

Let's set up your hardware


A B C D

**2** Set Up Camera

**3** Complete

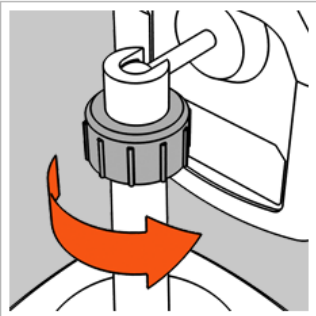

Turn the collar on the camera base counter-clockwise to loosen it.

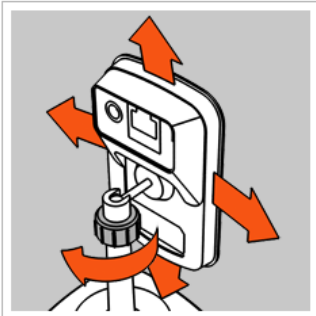

After moving the camera to the position you want, tighten the collar by turning it clockwise.

Back

Next

Troubleshooting | Support | D-ViewCam | Manual | Quick Guide | Acrobat Reader | About | Exit

Copyright © D-Link Corporation Inc. All rights reserved.

**Step 4:** Connect the included Ethernet cable to the port on the DCS-930L/DCS-932L camera. Connect the other end of the cable to an available LAN port on your router. Click **Next** button.

**D-Link**<sup>®</sup> DCS-932L Wireless N Day/Night Home Network Camera


**1** Install Camera

Connect the Ethernet cable


A B C D

**2** Set Up Camera

**3** Complete



(1) Connect the included Ethernet cable to the ETHERNET port on the DCS-932L camera.



(2) Connect the other end of the cable to an available LAN port on your router.

[Click here to see a basic overview of how your devices connect together.](#)

Back

Next

Troubleshooting | Support | D-ViewCam | Manual | Quick Guide | Acrobat Reader | About | Exit

Copyright © D-Link Corporation Inc. All rights reserved.

**Step 5:** Attach the power adapter to the power jack on the back of the DCS-930L/DCS-932L camera, and connect the power adapter to a power outlet. Ensure that the **Status** LED on the front of the camera is solid green after 30 seconds. Click **Next** button.

**D-Link**<sup>®</sup> DCS-932L Wireless N Day/Night Home Network Camera

1 Install Camera

2 Set Up Camera

3 Complete

## Connect the power adapter



(1) Connect the power adapter to the power jack on the back of the camera and plug the other end into the power outlet.

(2) The LED on the front of the camera will turn green when the device is ready.

 [What do I do if the LED stays red?](#)

Back

Next

Troubleshooting | Support | D-ViewCam | Manual | Quick Guide | Acrobat Reader | About | Exit

Copyright © D-Link Corporation Inc. All rights reserved.


**Step 6:** A pop up message will appear. Please check if the LED on the front of the camera lit is solid green. Click **Yes** button if it is solid green.

Is the LED on the front of your camera green?


Yes

No

**Step 7:** Please wait while the Wizard is detecting the camera on your network.

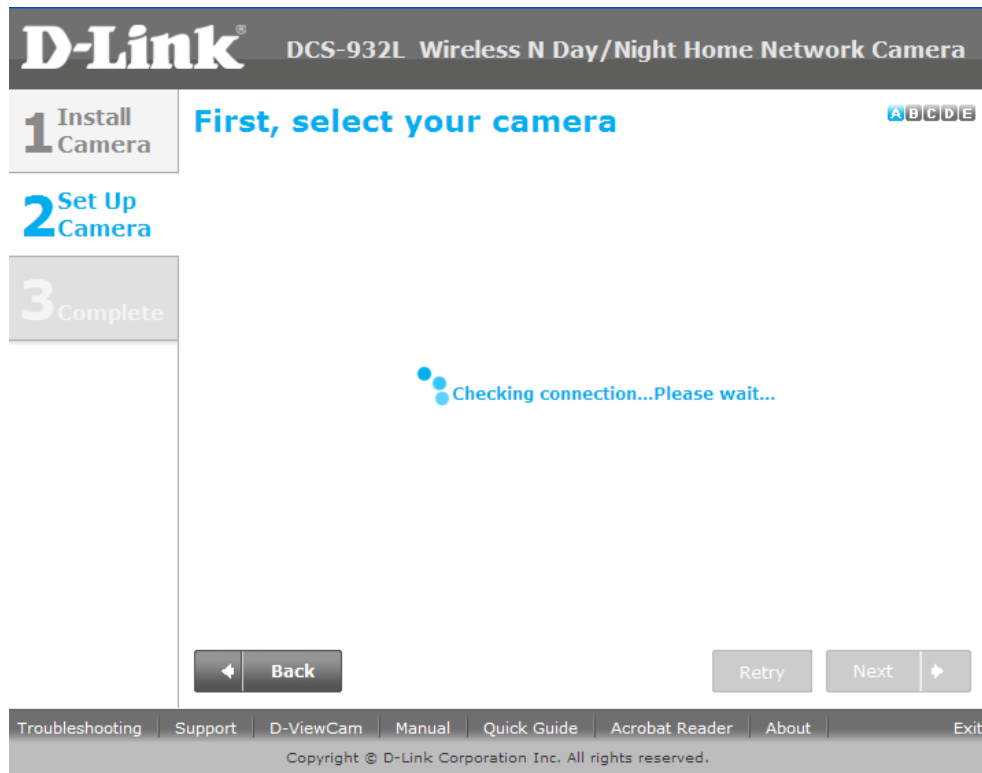

**Step 8:** You will now see the camera device information with its corresponding IP Settings and MAC Address. Click **Next** button.

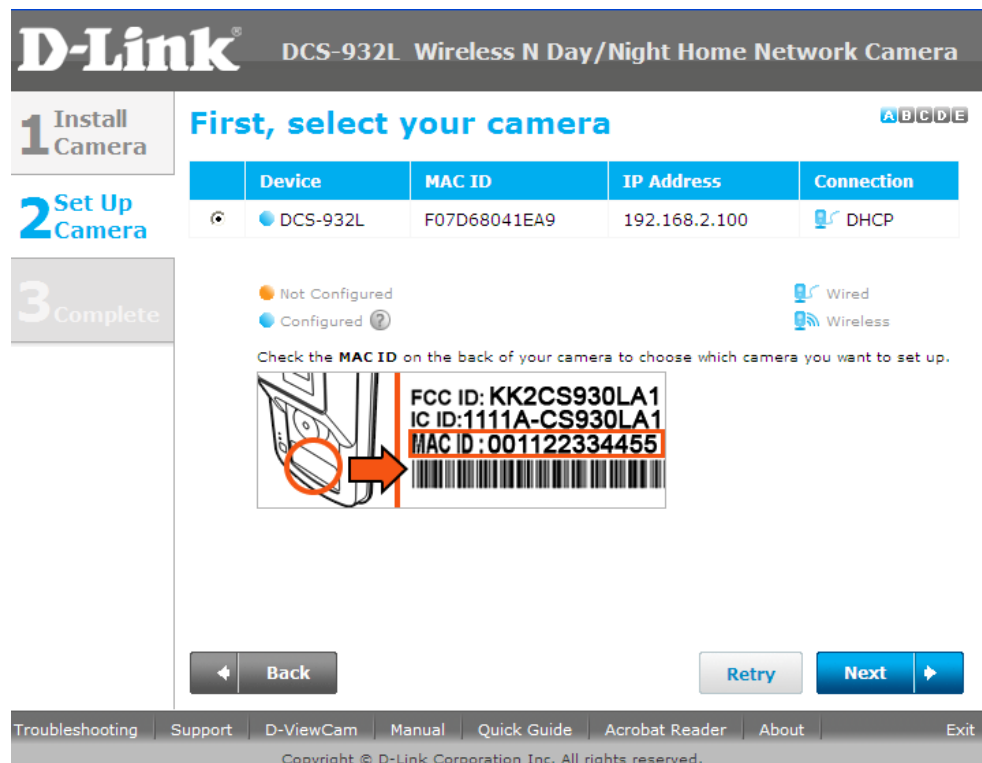

**Step 9:** Please enter a password to secure you camera. Click **Next** button when done.

The screenshot shows the 'Set your camera's password' page. On the left, a vertical sidebar contains three steps: '1 Install Camera' (highlighted), '2 Set Up Camera', and '3 Complete'. The main content area has the title 'Set your camera's password' and a sub-header 'Please enter a password to secure your camera.' Below this are three input fields: 'Admin ID:' with 'admin' entered, 'New Password:' with masked characters, and 'Confirm new password:' with masked characters. A note specifies: '(Must be 6-8 characters, must contain at least 2 letters, case-sensitive, no spaces.)'. At the bottom are 'Back' and 'Next' buttons. A footer bar contains links: Troubleshooting, Support, D-ViewCam, Manual, Quick Guide, Acrobat Reader, About, and Exit. Copyright text is at the very bottom.

**1** Install Camera

**2** Set Up Camera

**3** Complete

## Set your camera's password

Please enter a password to secure your camera.

Admin ID:

New Password:

(Must be 6-8 characters, must contain at least 2 letters, case-sensitive, no spaces.)

Confirm new password:

Back Next

Troubleshooting Support D-ViewCam Manual Quick Guide Acrobat Reader About Exit

Copyright © D-Link Corporation Inc. All rights reserved.

**Step 10:** If you want to setup your camera wirelessly, make sure that your router supports wireless. If so, select the radio button "**I want to connect my camera wirelessly**". On the Available Wireless Network, select the name of your wireless network and click **Next** button.

If you want to connect your camera via a network cable, please select "**Wired – I want to connect my camera through a cable (wired connection)**". Click **Next** button.

The screenshot shows the 'Wired or Wireless?' page. The sidebar is the same as in Step 9. The main content area has the title 'Wired or Wireless?' and a sub-header 'How would you like to connect your camera to your network?'. There are two radio button options: 'Wired - I want to connect my camera through a cable (wired connection)' and 'Wireless - I want to connect my camera wirelessly (wireless connection)'. The 'Wireless' option is selected and highlighted with a red box. Below this is a 'Select a Wireless Network:' section with a dropdown menu showing a list of networks: 'dlink', 'dir\_655\_5230', 'dlink\_54G+', 'tydefault', 'DIR-655-Test', 'Hot\_Spot\_1', 'devel05', 'A9F1BDF1DAB1NVT4', and 'Custom...'. A 'Rescan' button is next to the dropdown. At the bottom are 'Back' and 'Next' buttons, with the 'Next' button highlighted by a red box. The footer bar and copyright text are identical to the previous screenshot.

**D-Link** DCS-932L Wireless N Day/Night Home Network Camera

**1** Install Camera

**2** Set Up Camera

**3** Complete

## Wired or Wireless?

How would you like to connect your camera to your network?

☐ Wired - I want to connect my camera through a cable (wired connection)

☒ **Wireless - I want to connect my camera wirelessly (wireless connection)**

Select a Wireless Network:  Rescan


- dlink
- dir\_655\_5230
- dlink\_54G+
- tydefault
- DIR-655-Test
- Hot\_Spot\_1
- devel05
- A9F1BDF1DAB1NVT4
- Custom...

Back Next

Troubleshooting Support D-ViewCam Manual Quick Guide Acrobat Reader About Exit

Copyright © D-Link Corporation Inc. All rights reserved.

**Step 11:** For wireless setup, enter the wireless encryption used on your wireless network and click **Next** button.

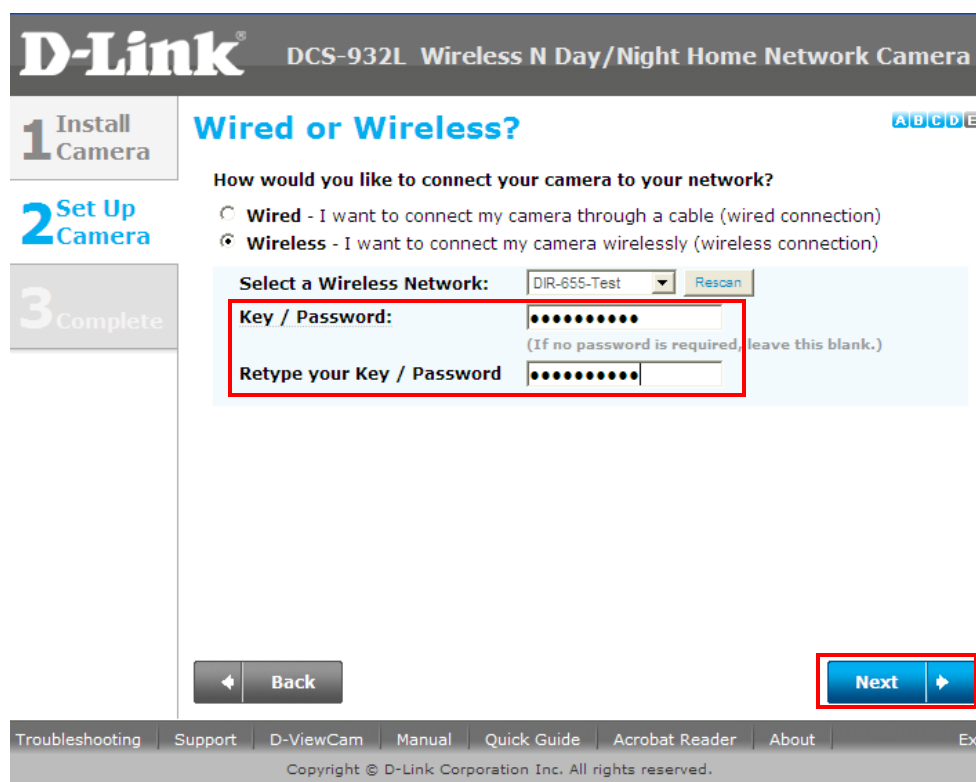

The image shows the D-Link DCS-932L Wireless N Day/Night Home Network Camera setup interface. On the left, there is a vertical navigation bar with three steps: '1 Install Camera', '2 Set Up Camera' (which is highlighted in blue), and '3 Complete'. The main content area is titled 'Wired or Wireless?' and asks 'How would you like to connect your camera to your network?'. There are two radio button options: 'Wired - I want to connect my camera through a cable (wired connection)' and 'Wireless - I want to connect my camera wirelessly (wireless connection)'. The 'Wireless' option is selected. Below this, there is a section for 'Select a Wireless Network:' with a dropdown menu showing 'DIR-655-Test' and a 'Rescan' button. Below the network selection, there are two input fields for 'Key / Password:' and 'Retype your Key / Password', both containing masked characters (dots). A red rectangular box highlights these two input fields. At the bottom of the main content area, there are two buttons: a 'Back' button with a left arrow and a 'Next' button with a right arrow. The 'Next' button is highlighted with a red rectangular box. At the very bottom, there is a footer bar with links for 'Troubleshooting', 'Support', 'D-ViewCam', 'Manual', 'Quick Guide', 'Acrobat Reader', 'About', and 'Exit'. Below the footer bar, it says 'Copyright © D-Link Corporation Inc. All rights reserved.'

**Step 12:** Please unplug the Ethernet cable from the back of your camera, then click **Continue** button. Please wait while the camera is restarting.



The image shows a screen with the title 'Your camera will now reboot.' in blue text. Below the title, it says 'Please unplug the Ethernet cable from the back of your camera, then click **Continue**.' At the bottom right of the screen, there is a blue button with the text 'Continue' in white. The button is highlighted with a red rectangular box.

**Step 13:** Select the radio button **"No, I need to sign up for a new account"**. Please enter the following information to sign up for a mydlink account;

<b>E-Mail</b>	: Enter a valid and working email address for activation
<b>Password</b>	: Enter at least 6 characters (case sensitive)
<b>Retype Password</b>	: Retype the password created
<b>First Name</b>	: Enter the name of the person to register the account
<b>Last Name</b>	: Enter the surname of the person to register the account

- Put a check mark on **"I accept the mydlink terms and conditions"**.
- Click **Next** button.

**1** Install Camera

**2** Set Up Camera

**3** Complete

### Let's add your camera to your mydlink account

Adding your camera to your [mydlink.com](#) account will allow you to access your camera through the Internet.

**Do you have a mydlink account?**

☐ Yes, I already have a mydlink account.

☒ **No, I need to sign up for a new account.** **1**

Please enter the following information to sign up for a mydlink account:

**E-mail:**

**Password:**

At least 6 characters, and is case sensitive.

**Retype password :**  **2**

**First Name:**


**Last Name:**

**3** ☒ I accept the [mydlink terms and conditions](#).

**4**


**Step 14:** A verification e-mail has been sent to your e-mail address. Click **OK** button to continue.

## Verify your e-mail:

 A verification e-mail has been sent to [jessperbaylon@yahoo.com](#).

Please check your e-mail inbox, open the verification e-mail, and click on the activation link in the e-mail to finish activating your account.

**Step 15:** Set-up is Complete. Click **Finish** button.

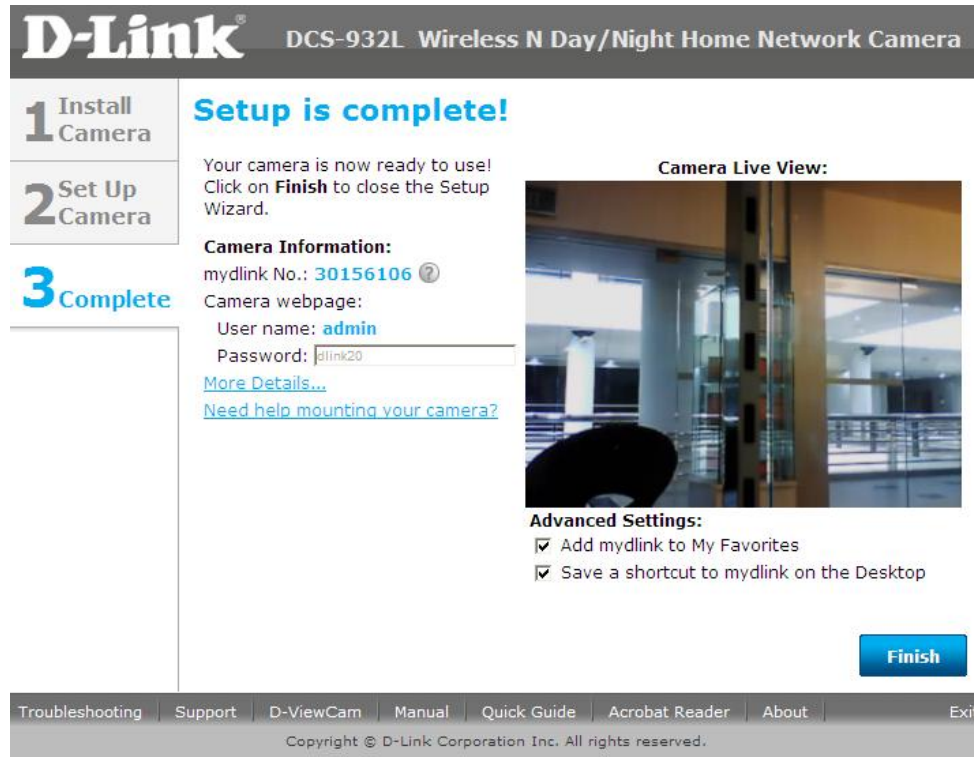

**Step 16:** Log-in to your e-mail address and check the e-mail received from mydlink. On the message, click on the link provided to activate your mydlink account.

**Welcome to mydlink!**

Wed, February 16, 2011 7:48:01 AM

From: mydlink <mydlink@mydlink.com> [Add to Contacts](#)  
To: jessperbaylon@yahoo.com

Hello Jessper,

Thank you for joining mydlink.

To activate your mydlink account, please click the link below:

[http://sq.mydlink.com/activated\\_account/code=c81a819f6e56240853c01883c240448b](http://sq.mydlink.com/activated_account/code=c81a819f6e56240853c01883c240448b)

If clicking the link doesn't work, copy and paste the URL address into Internet Explorer.

After activating your account, you will be able to sign in to [sq.mydlink.com](http://sq.mydlink.com) using the e-mail address and password you provided during the signup or Installation wizard

If you have received this e-mail in error, please ignore this e-mail and we apologize for th [sq.mydlink.com](http://sq.mydlink.com).

=====  
This e-mail message was sent from a notification-only address that cannot accept incoming e-mail. Please do not reply to this message.  
If you have any questions, please contact mydlink customer service at [sq.mydlink.com/content/contact](http://sq.mydlink.com/content/contact)  
=====



**Step 17:** It will now re-direct you to the mydlink web page. Click **Start mydlink** button.



**mydlink Signup Complete**


**Congratulations!** Your account is now active and your device was successfully activated.

mydlink Account: **jessperbaylon@yahoo.com**

**Getting started with mydlink: ActiveX**


After clicking the "Start mydlink" button at the bottom-right, you may see this message appear at the top of your browser window when trying to view live video:

**Step 1:**

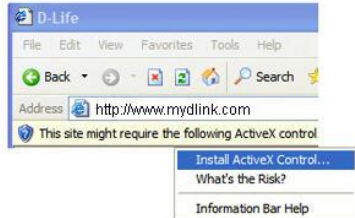

If you see this message appear, click on the message, then click on "Install ActiveX Control..."

**Step 2:**



Click "Install" in the Internet Explorer - Security Warning window that appears. The ActiveX Control will automatically install, and you are now ready to enjoy mydlink!

**Start mydlink**


**Step 18:** The image of the camera will now show-up on your mydlink account.




mydlink Lite | **My Devices** | My Profile | Sign out

**My Devices**

Delete Device




**DCS-932L**  
30156106



**DCS-1130L**  
30038262

**Live Video** | Camera Settings | Camera Info

Live Video Mode



Remaining Time: 2 seconds ?

zoom in zoom out zoom 100%

**Note:** You may repeat the same procedure to add more mydlink ip cameras to your mydlink account.