

Product Highlights

Latest Wireless AC Technology

Enjoy combined wireless speeds of up to 750 Mbps and increased range thanks to the latest 802.11ac wireless technology

Dual-Band Wi-Fi for Seamless Performance

Access your network via two concurrent wireless bands for seamless performance no matter what you are doing

Intuitive Setup Wizard

The setup wizard allows you to directly connect to the router and follow the on-screen instructions, making installation hassle free



DSL-2877AL

Dual Band 11ac ADSL2+ Four Port Wireless Router

Features

High-Speed Connectivity

- The latest 802.11ac wireless specification delivers blazing fast wireless connectivity with increased range and reliability
- RJ11 ADSL port for speedy Internet access
- Four 10/100 Fast Ethernet LAN ports give you high-speed wired connectivity

Flexible Bandwidth

- One 1000 Gigabit Ethernet WAN port, supports more WAN applications
- Concurrent dual-band wireless for combined connections of up to 750 Mbps¹
- QoS engine to prioritize important traffic and deliver uninterrupted bandwidth

Setup and Management

- Setup wizard to guide you through the configuration process
- Free downloadable One-Touch step-by-step installation mobile app for your smartphone or tablet
- Firewall and access control options to prevent attacks and restrict access to your network

The DSL-2877AL Dual Band 11ac ADSL2+ Four Port Wireless Router provides high-speed Internet and wireless coverage to smart devices in your home. With concurrent dual-band 802.11ac, it brings you the future of high-bandwidth wireless connectivity, allowing you to stream HD video, make Internet voice calls, and surf the web uninterrupted from anywhere in your home. An Ethernet switch provides wired connections for other devices such as a network storage, to ensure that your data is always accessible. It's stylish, easy-to-use, and comes IPv6-ready so you can keep up with the next generation of network devices.

High-Speed Wired and Wireless Connectivity

The DSL-2877AL Dual Band 11ac ADSL2+ Four Port Wireless Router uses the latest high-speed wireless technology to bring you lightning-fast Wi-Fi speeds of up to 750 Mbps¹, and an increased range. Enjoy streaming media, Internet phone calls, online gaming, and content-rich web surfing throughout your home. In addition, four Fast Ethernet ports give you solid, dependable wired performance for devices such as media centers and game consoles. The built-in Quality of Service (QoS) engine allows you to prioritize important traffic to ensure that your favorite applications are receiving optimal bandwidth.


Dual-Band Wireless for Seamless Performance

The DSL-2877AL features dual-band wireless, allowing you to operate two concurrent, high-speed Wi-Fi bands for ultimate wireless performance. Surf the web, chat, and play online games on the 2.4 GHz band, while simultaneously streaming digital media on the 5 GHz band. What's more, each band can operate as a separate Wi-Fi network, giving you the ability to customize your network according to your connectivity needs. You can even configure a guest zone to give visitors Internet access without giving them access to the rest of your network.

Dual Band 11ac ADSL2+ Four Port Wireless Router

Easy to Set Up, Easy to Secure

Sharing your Internet connection doesn't have to be a complicated process; just open a web browser to access the setup wizard and follow the easy step-by-step instructions to get started. Implement WPA/WPA2 wireless security in minutes with the wireless network setup wizard, or use Wi-Fi Protected Setup (WPS), which establishes a secure connection to new devices without the need to enter settings or create passwords. In addition, the built-in firewall protects against malicious attacks from the Internet, and access control features allow you to restrict access to your network.

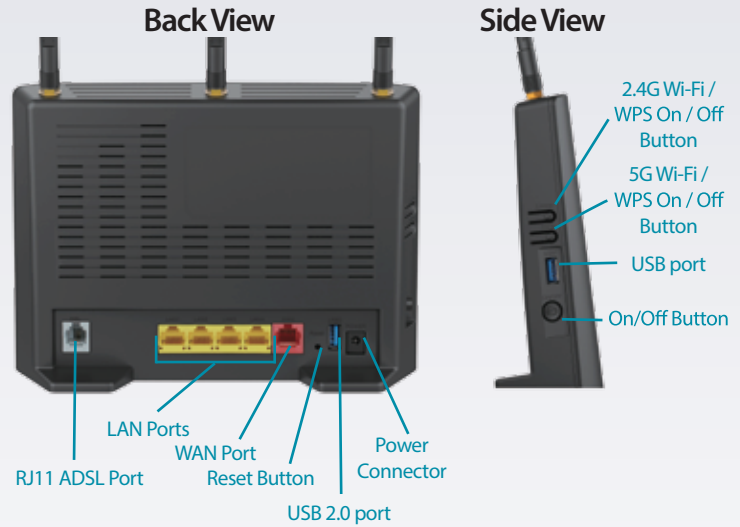

Technical Specifications

General

Device Interfaces	<ul style="list-style-type: none"> 10/100/1000 Gigabit Ethernet WAN port 802.11 ac/n/g/b Wireless LAN Four 10/100 Fast Ethernet LAN ports 	<ul style="list-style-type: none"> RJ-11 ADSL port Two USB 2.0 ports
ADSL Compliance	<ul style="list-style-type: none"> ADSL Standards <ul style="list-style-type: none"> Multi-mode Full-rate ANSIT1.413 Issue 2 ITU-T G.992.1 (G.dmt) Annex A/C/I ITU-T G.992.2 (G.lite) Annex A/C ITU-T G.994.1 (G.hs) 	<ul style="list-style-type: none"> ADSL 2 Standards <ul style="list-style-type: none"> ITU-T G.992.3 (G.dmt.bis) Annex A/J/K/L/M ADSL 2+ Standards <ul style="list-style-type: none"> ITU-T G.992.5 Annex A/L/M
ATM/PPP Support	<ul style="list-style-type: none"> Multiprotocol over AAL5 (RFC 1483/2684) Bridged and routed Ethernet encapsulation LLC encapsulation VC-based multiplexing ATM Forum UNI3.1/4.0 PVC (up to 8 PVCs) ATM Cell Format ITU-T Rec. I.361 ATM Adaptation Layer Type 5 (AAL5) PPPoA (RFC2364) 	<ul style="list-style-type: none"> PPPoE (RFC2516) PPP Link Control Protocol (RFC 1661) Internet Protocol Control Protocol (RFC 1332) PPP Authentication Protocol (RFC 1334) PPP Challenge Handshake Authentication Protocol (RFC 1994) Microsoft PPP CHAP extensions (RFC 2433)
WLAN Specifications	<ul style="list-style-type: none"> 802.11 n/g/b, up to 300 Mbps 802.11 ac/a, up to 433 Mbps Wi-Fi Protected Setup (WPS) Multiple SSIDs Automatic rate adapting WAN scheduling 	<ul style="list-style-type: none"> Auto channel selection WMM support 64-bit & 128-bit WEP WPA-PSK & WPA2-PSK MAC address filtering
Network Services	<ul style="list-style-type: none"> IPv4 DHCP server/client/relay DNS relay Dynamic DNS (DDNS) Routing Information Protocol (RIP) v1/v2 NAT AGLs <ul style="list-style-type: none"> PPTP L2TP FTP RTSP (RealTime Streaming Protocol) SIP v1/v2 IPsec Internet Control Message Protocol (ICMP) Virtual server (Port forwarding) Simple Network Time Protocol (SNTP) 	<ul style="list-style-type: none"> 802.1d MAC Bridge (up to 256*8 MAC addresses) QoS <ul style="list-style-type: none"> IPP/ToS DSCP QoS in 4-priority queues Application QoS in 4-priority queues Strict priority VLAN QoS in 4-priority queues QoS remarking based on IPP/ToS, DSCP and 802.1p TOS transparency through NAT Mapping to queue according to DSCP bits and physical port 802.1Q IGMP proxy v1/v2 IGMP snooping v1/v2/v3
Standards	<ul style="list-style-type: none"> IEEE 802.11ac IEEE 802.11n IEEE 802.11g 	<ul style="list-style-type: none"> IEEE 802.11b IEEE 802.3 IEEE 802.3u

Dual Band 11ac ADSL2+ Four Port Wireless Router

Minimum System Requirements	<ul style="list-style-type: none"> Windows 8/7/Vista/XP SP3 or Mac OS X 10.4 or higher Microsoft Internet Explorer 6 or higher, Firefox 1.0 or higher, Safari 1.2 or higher, or other Java-enabled browser 	<ul style="list-style-type: none"> Ethernet network interface Subscription with an Internet Service Provider (ISP)
Functionality		
Universal Plug and Play Support	<ul style="list-style-type: none"> UPnP based auto-configuration UPnP based port forwarding 	<ul style="list-style-type: none"> UPnP IGD 1.0
Security	<ul style="list-style-type: none"> Attack Prevention <ul style="list-style-type: none"> Port scanning & illegal packet attack DoS Attack SYN Flooding Ping of Death Teardrop LAND attack IP Spoofing IP with zero length Smurf Attack TCP Null Scan 	<ul style="list-style-type: none"> Stateful Packet Inspection (SPI) Management Access Control for LAN/WAN sides IP filtering MAC filtering URL filter Demilitarized Zone (DMZ)
Device Management	<ul style="list-style-type: none"> Web configuration Telnet management Webpage/X-Modem/FTP/TFTP firmware upgrade 	<ul style="list-style-type: none"> Diagnostic tools for ADSL and IP Ping One Touch Setup wizard
Advanced Features	<ul style="list-style-type: none"> Multi-language web setup wizard UPnP support 802.1p QoS VPN pass-through/multi-session PPTP/L2TP/IPSec 	<ul style="list-style-type: none"> Dual-active firewall <ul style="list-style-type: none"> Network Address Translation (NAT) Stateful Packet Inspection (SPI)
Physical		
Dimensions	<ul style="list-style-type: none"> 198 x 146 x 54 mm (7.79 x 5.74 x 2.12 inches) 	
Weight	<ul style="list-style-type: none"> 302 grams (9.6 oz) 	
Temperature	<ul style="list-style-type: none"> Operating: 0 to 40 °C (32 to 104 °F) 	<ul style="list-style-type: none"> Storage: -20 to 65 °C (-4 to 149 °F)
Humidity	<ul style="list-style-type: none"> 5 % to 95 % non-condensing 	
Certifications	<ul style="list-style-type: none"> CE Wi-Fi RCM 	<ul style="list-style-type: none"> Wi-Fi Protected Setup (WPS) A-Tick C-Tick
Order Information		
<i>Part Number</i>	<i>Description</i>	
DSL-2877AL	Dual Band 11ac ADSL2+ Four Port Wireless Router	

¹ Maximum wireless signal rate derived from IEEE standard specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental factors will adversely affect wireless signal range.

2014/07/29